

creative computing

November 1979

vol 5, no 11

\$2.00

the #1 magazine of computer applications and software

**Comparison Chart of 6
Popular Personal Computers**


**Car Pooling and
Personal Computers**

**Comparison of Single
Board Computers**

**Adventure Game:
Complete Listing
In Basic**

**Electronic
Toys and
Games**

**Interact
Computer**

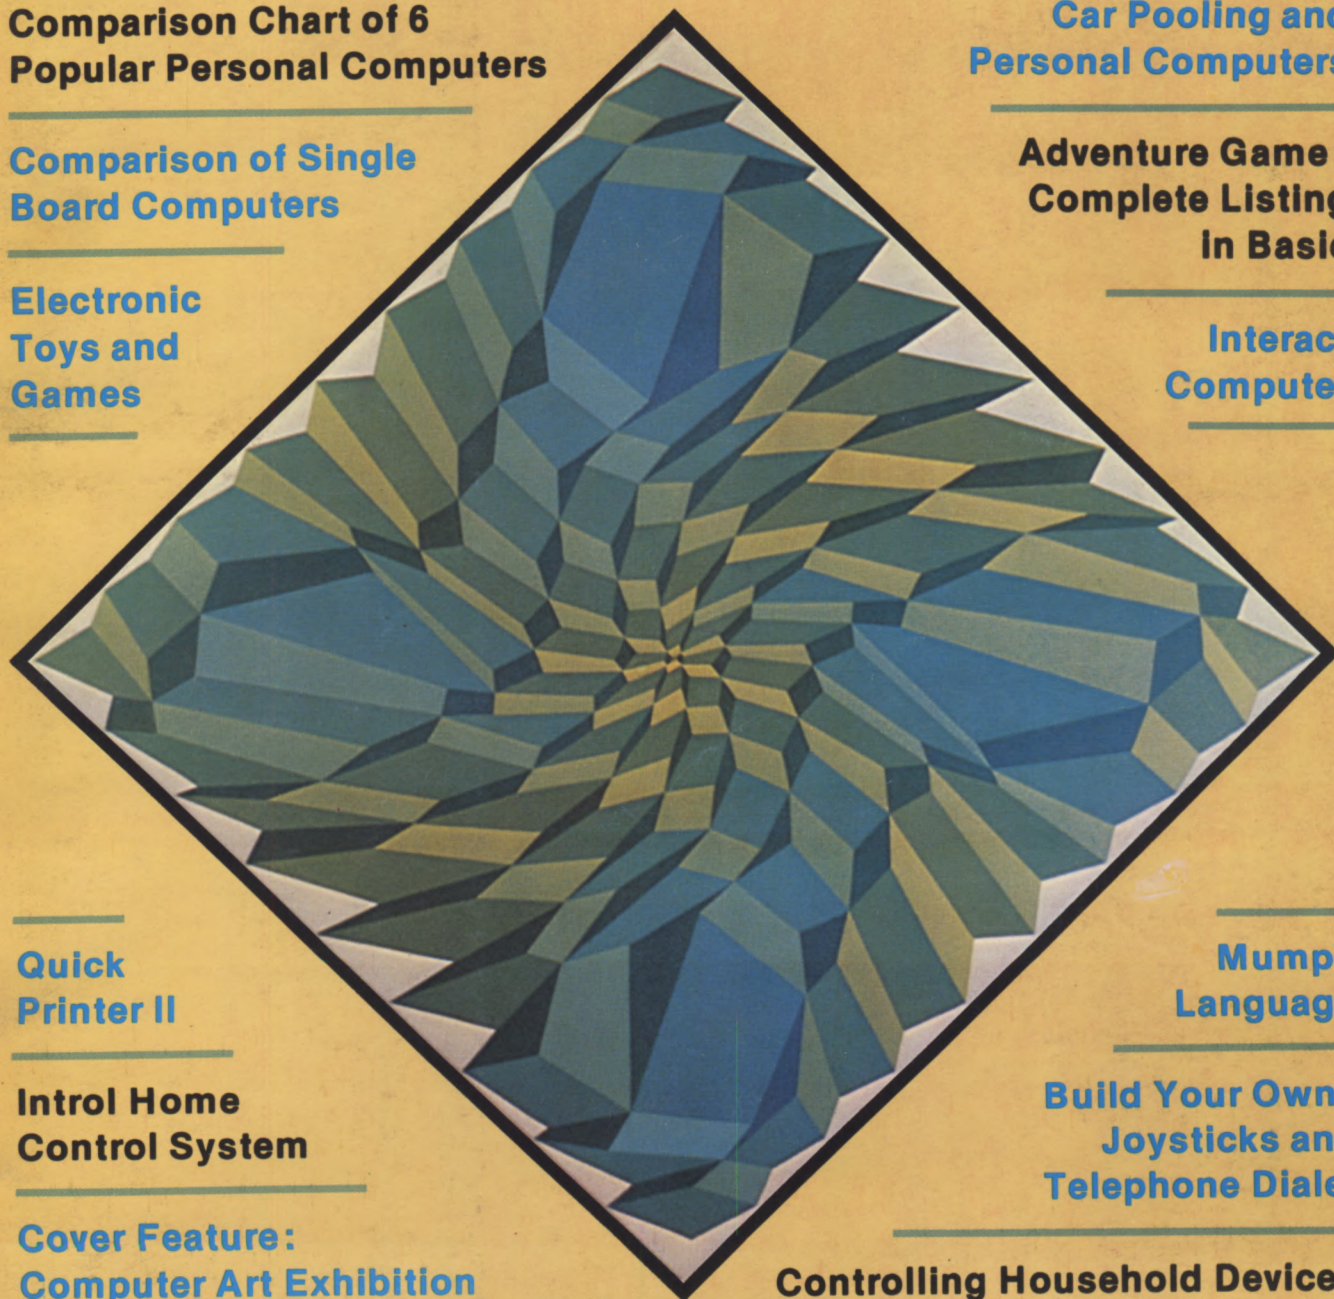

**Quick
Printer II**

**Mumps
Language**

**Introl Home
Control System**

**Build Your Own:
Joysticks and
Telephone Dialer**

**Cover Feature:
Computer Art Exhibition**

Controlling Household Devices

ALTOS COMPUTER SYSTEMS PROUDLY ANNOUNCES

SUN-SERIES

ACS8000-6



THE VERY FIRST

Double Density Z80 Micro-Computer
plus Twin 8" Floppies
plus 14.5Mb Winchester Disk
for under \$9,500!

And more! 4 user CP/M® for under \$12,000!

*CP/M is a registered trademark of Digital Research, Inc.

ALTOS COMPUTER SYSTEMS, LEADER IN SINGLEBOARD TECHNOLOGY
DOES IT AGAIN WITH ITS SINGLEBOARD ACS8000-6. TOTAL BUSINESS COMPUTER

HIGH TECHNOLOGY AGAIN

The new ACS8000-6 single board computer is packed with ultra-high technology: Z80 double-density computer, up to 208Kb of high speed RAM, Floppy-disk and Winchester Hard Disk controllers, DMA, up to 6 serial/2 Parallel I/O, optional 32 bit floating point processor . . . All on One Board, fully socketed, fully documented reliable and maintainable.

ADVANCED MULTI-USER SOFTWARE

Our new ALTOS Multi-User Executive (AMEX) supports four independent CP/M compatible programs in any of six languages: Basic, Fortran, Cobol, Pascal, APL, C, and a wealth of complete business application packages.

WINCHESTER MASS STORAGE

We're staying with Shugart for both floppies and Winchester hard disk. Why? Simple, low price, solid reliability and they're our next door neighbor. Our single board computer supports up to 4 Mbytes of floppies and 58 Mbytes of Winchester running under AMEX.

MINI PERFORMANCE FOR 1/2 COST

Prices you will love. Entry level ACS8000-6 Hard Disk System \$9,450
2 users \$10,670, 4 users \$11,960,
AMEX separate at \$250.

AVAILABLE NOW!

Call for your nearest Altos dealer. (408) 244-5766. Telex 171562 ALTOS SNTA.

ALTOS
COMPUTER SYSTEMS

2338-A Walsh Avenue
Santa Clara, Ca. 95050

CIRCLE 108 ON READER SERVICE CARD



CHRISTMAS GIFT IDEAS!

For the young 'uns...

- **Bionic Toad T-Shirt**

Black design on light blue shirt.

- **Program Bug T-Shirt**

Dark blue design on beige shirt.

Both available in childrens S (6-8), M (10-12) and L (14-16). (Also in adult S, M, L, XL). \$5.00 postpaid.



For ages 7-14...

- **Computer Rage Game**

For 1 to 4 players. With binary dice, interrupt cards and colorful 19" x 19" board. \$8.95 postpaid.

- **Computer Coin Games**

Learn how computer circuits work with these novel "penny" games. \$4.70 postpaid.

- **Computer Myth Posters**

8 of Wolverton's best, heavy stock, 12" x 17". \$3.00 per set postpaid.



For all ages...

- **More Basic Computer Games**

84 new games for most computers. \$8.25 postpaid.

- **ROM Magazine**

Complete set of 9 issues. \$14.00 per set.

- **Creative Computing Subscription**

Order using handy card in back.



Many more gift ideas can be found on pages 152-158.



NOW-CALL TOLL-FREE

800-631-8112

(In NJ, call 201-540-0445)

CHARGE YOUR ORDER



TV makes people SICK!!
 TV ENSLAVES you and SAPS
 ALL YOUR CREATIVE ENERGY!
 TV HOOKS You like DOPE!
 TV is obviously a "VAST
 WASTELAND." This is com-
 mon knowledge.
 TV is just plain BAD for
 you physically, mentally,
 and spiritually. Watching
 it will cause you great un-
 happiness in life and you're
 more than likely to get
 CANCER!!


If your CREATIVE INSANITY is
 seeking a real outlet, then read

creative computing



It's the magazine that answers
 to NO ONE!! CREATIVE COM-
 PUTING is the Last outspoken
 Bastion of TRUTH left in
 America today. Read it and
 you shall be free! Contained
 within these pages are mind-
 blowing glimpses of REALITY as
 it REALLY IS! This magazine
 BREAKS THROUGH the Tv-
 induced stupor, for it is ANTI-
 MEDIA! It has things for you
 to ACTUALLY Do! It's got the
 medicine for the BLUES, and
 has been known to turn MEN-
 TALLY ILL persons into HEALTHY,
 GOOD-HUMORED FREE-THINKERS. You
 too will benefit from reading
 CREATIVE COMPUTING!!

Only \$15.00 per year (12 issues!)
 CREATIVE COMPUTING, Dept. C,
 P.O. Box 789-M, Morristown, NJ 07960.

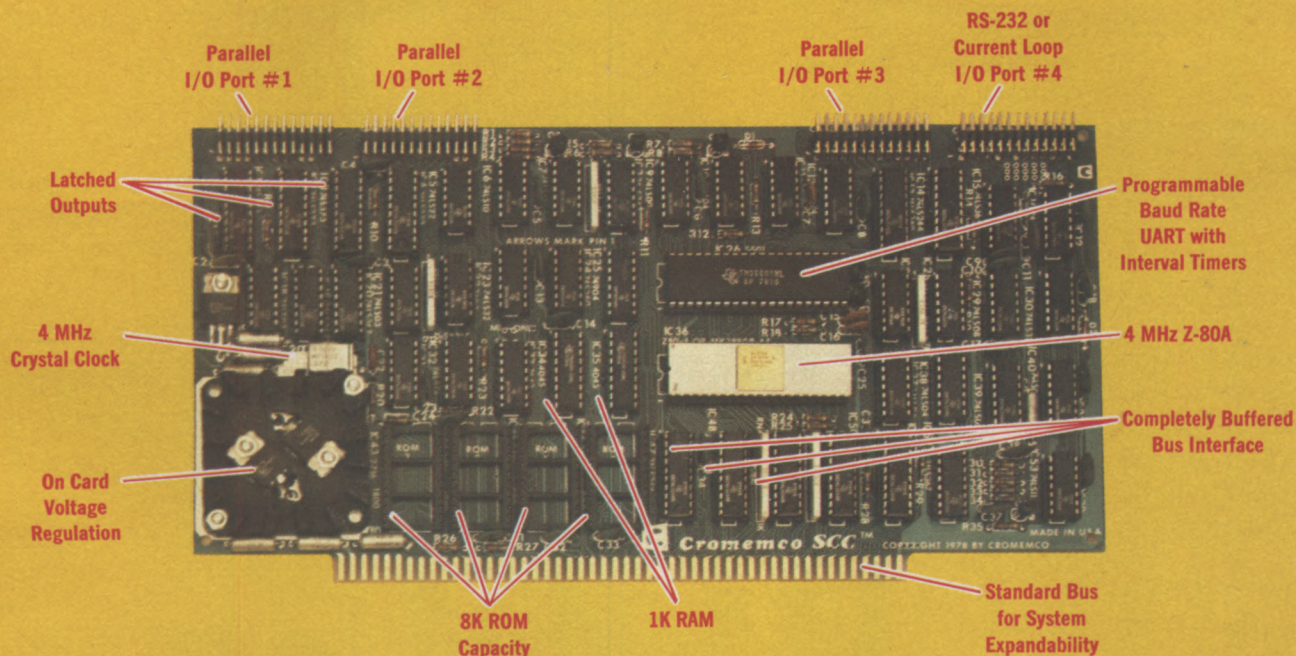

The single card computer with the features that help you in real life

COMPLETE COMPUTER

In this advanced card you get a professional quality computer that meets today's engineering needs. And it's one that's complete. It lets you be up and running fast. All you need is a power supply and your ROM software.

The computer itself is super. Fast 4 MHz operation. Capacity for 8K bytes of ROM (uses 2716 PROMs which **can be programmed by our new 32K BYTESAVER®** PROM card). There's also 1K of on-board static RAM. Further, you get straightforward interfacing through an RS-232 serial interface with ultra-fast speed of up to 76,800 baud — software programmable.

Other features include 24 bits of bi-directional parallel I/O and five on-board programmable timers.


Add to that vectored interrupts.

ENORMOUS EXPANDABILITY

Besides all these features the Cromemco single card computer gives you enormous expandability if you ever need it. And it's easy to expand. First, you can expand with the new Cromemco 32K BYTESAVER PROM card mentioned above. Then there's Cromemco's broad line of S100-bus-compatible memory and I/O interface cards. Cards with features such as relay interface, analog interface, graphics interface, optoisolator input, and A/D and D/A conversion. RAM and ROM cards, too.



Card Cage



32K BYTESAVER PROM card

EASY TO USE

Another convenience that makes the Model SCC computer easy to use is our Z-80 monitor and 3K Control BASIC (in two ROMs). With this optional software you're ready to go. The monitor gives you 12 commands. The BASIC, with 36 commands/functions, will directly access I/O ports and memory locations — and call machine language subroutines.

Finally, to simplify things to the ultimate, we even have convenient card cages. Rugged card cages. They hold cards firmly. No jiggling out of sockets.

AVAILABLE NOW/LOW PRICE

The Model SCC is available now at a low price of only \$450 burned-in and tested (32K BYTESAVER only \$295).

So act today. Get this high-capability computer working for you right away.



Cromemco
i n c o r p o r a t e d

Specialists in computers and peripherals

280 BERNARDO AVE., MOUNTAIN VIEW, CA 94040 • (415) 964-7400

CIRCLE 138 ON READER SERVICE CARD

**Tinker, Tailor, Soldier, Sailor . . .
Doctor, Lawyer . . . the Chieftain's here.**

No matter whether you're a serious hobbyist or a serious businessman, the Chieftain 6800 microcomputer with capabilities that surpass the Z-80 is made for you.

Smoke Signal's quality-packed Chieftain I features two 5.25-inch mini-floppy drives and Chieftain II features two 8-inch floppy drives.

Both microcomputers provide 32K static memory, two serial I/O ports, a 2 MHz processor board, a 2K RAM monitor, a nine-slot motherboard with built-in baud rate generator and gold connectors for high reliability. The Chieftain's stylish leather-grained cabinet houses the above with its own cooling fan and regulated power supply.

Every Chieftain is complete with system software and is totally burned-in as well as tested to further insure high reliability.

And it's expandable to 64K memory with up to 2 megabytes floppy disk storage.

So see your nearest Smoke Signal dealer, he'll be glad to show you how to get your wampum's worth. Systems start at \$2,595.



- ☐ Send information on your Chieftain microcomputer
- ☐ Send name of nearest dealer

Name _____

Address _____

Company _____

City _____

State/Zip _____



**SMOKE SIGNAL
BROADCASTING**

31336 Via Colinas, Westlake Village,
California 91361. (213) 889-9340

Dealer inquiries invited.



Hail to the Chieftain

Smoke Signal Broadcasting, 31336 Via Colinas, Westlake Village, CA 91361, (213) 889-9340

In This Issue

articles

- 60** **Today the House, Tomorrow the?** Garetz
Controlling household devices
- 66** **Computer Aided Manufacturing** Carpenter
Part 2: Data base and reporting activities
- 74** **Car Pooling and Personal Computers** Craig
A natural alliance in the "energy war"
- 84** **Computer Art Exhibition** Westlake
Cover feature
- 88** **A Touch of Mumps** Zimmerman
If you like Pilot, you'll love Mumps

applications ~ games

- 98** **Build Your Own Joysticks** Sabot
Controls for your favorite games
- 102** **Telephone Dialer** Christianson
Dial the phone with your TRS-80 or Northstar
- 104** **Teacher-Made Tests** Green & Hering
Aids for the classroom
- 108** **Adventure** Moser
Complete program in BASIC
- 140** **Short Programs** Readers
5 routines for your computer
- 150** **Puzzles & Problems** Townsend
Some new ones to tickle your grey cells

evaluations & profiles

- 12** **Electronic Games and Toys** Ahl & Staples
Helpful hints for your holiday shopping
- 24** **Single Board Computers** Grossman
Characteristics of 26 units
- 30** **Personal Computer Comparison** North
Characteristics of 6 popular units
- 32** **Quick Printer II** Blank
A low cost entry from Radio Shack
- 36** **Interact Computer** North
A low cost system worthy of your consideration
- 38** **User-Definable Character Generators** North
Design your own graphics for the Apple
- 42** **TRS-80 Level III Basic** Bunnell
Expand the power of your TRS-80
- 46** **PET Software from Creative Software** Heuer
5 new well-designed packages
- 48** **Battle of the Word Processors** Hallen
We pick the winners and losers - Part 2
- 54** **Introl X-10 Home Control System** Daro
Control devices in your home with an Apple

fiction & foolishness

- 95** **Computer Myths Explained** Wolverton
Computer concoctions
- 148** **The Awakening** Ahl
A 9-year old talks to a computer

departments

- 6** **Et Cetera** Et al
- 144** **Compendium** Staff
Housebreaking, hearing, energy-saving, Viewdata
- 159** **Compleat Computer Catalogue** Staples
New Products with an emphasis on software
- 172** **Software Legal Forum** Novick
Who has the right to published programs?
- 174** **Questions & Answers** Tubb
Printers, ROM's, Z-80's, TV Bandwidth
- 178** **TRS-80 Strings** Gray
Graphics, Happy Face, RAM-test
- 183** **Personal Electronic Transactions** Yob
Goodies for your PET
- 188** **Book Reviews** Gray
- 192** **Advertiser's Index**

The Cover

The cover is by Ruth Leavitt and was one of the works of art on exhibit this past summer at the Westlake Gallery (see article on page 84). The program used to produce the graphic simulates stretching a geometric form and distorting it as though the design were on a rubber sheet. The computer produces its output on film which is then enlarged and made into a silk screen by hand. The final work is screened by hand in various colors to produce a striking effect.



NOVEMBER 1979 VOLUME 5, NUMBER 11

Creative Computing magazine is published monthly by Creative Computing, P.O. Box 789-M, Morristown, NJ 07960. (Editorial office: 51 Dumont Place, Morristown, NJ 07960 Phone: (201) 540-0445.)

Domestic Subscriptions: 12 issues, \$15, 24 issues \$28, 36 issues \$40. Send subscription orders or change of address (P.O. Form 3575) to Creative computing, P.O. Box 789-M, Morristown, NJ 07960. Call 800-631-8112 toll-free (in New Jersey call 201-540-0445) to order a subscription (to be charged only to a bank card).

Second class postage paid at Morristown, New Jersey and at additional mailing offices.

Copyright© 1979 by Creative Computing. All rights reserved. Reproduction prohibited. Printed in USA.


Publisher David H. Ahl

Editor John Craig

Managing Editor Burchenal Green

Associate Editor Steve North

Contributing Editors



Frederick Chesson
Margot Critchfield
Thomas W. Dwyer
Lee Felsenstein
Robert Goff
Stephen B. Gray
Richard Kaapke
Stephen Kimmel
Theodor Nelson
Harold Novick
Peter Payack
Alvin Toffler
C. Barry Townsend
Gregory Yob
Karl Zinn

Art Directors Nils Lommerlin
Carol Prymowicz

Production Manager Robert Borrell

Editorial Assistant Paulette Duval

Typesetter Janet Ganzenmuller

Advertising Sales Marcia Wood

Marketing Coordinator Nancy Wood

Software Development Randy Heuer
Rob Rich
Eric Van Horn
Chris Vogell
Ursula Wolz

Software Marketing Mgr. Sheryl Kennedy

Business Manager Betsy Staples

Bookkeeper Jeanne Tick

Retail Marketing Jennifer Burr

Circulation Suzanne Guppy
Customer Service

Office Assistant Barbara Shupe

Order Processing Donna Costanzo

Book Service Supervisor Holly Alderman
Patricia Mount

Book Service Scott McLeod

OK to Reprint

Material in *Creative Computing* may be reprinted without permission by school and college publications, personal computing club newsletters, company house organs, and non-profit publications. Only original material may be reprinted; that is, you may not reprint a reprint. Also, each reprint must carry the following notice on the first page of the reprint in 7-point or larger type (you may cut out and use this notice if you wish):

Copyright © 1979 by Creative Computing
51 Dumont Place, Morristown, NJ 07960
Sample issue \$2.00;
One-year subscription \$15.00

Please send us two copies of any publication that carries reprinted material. Send to attention: David Ahl.

Advertising Sales

Advertising Coordinator
Marcia Wood
Creative Computing
93 Washington Street
Morristown, N.J. 07960
(201) 540-9168

Western States, Texas
Jules E. Thompson, Inc.
1290 Howard Ave., Suite 303
Burlingame, CA 94010
(415) 348-8222

Southern California
Jules E. Thompson, Inc.
2560 Via Tejon
Palos Verdes Estates, CA 90247
(213) 378-8361

Mid-Atlantic, Northeast
CEL Associates, Inc.
36 Sohler Street
Cohasset, MA 02025
(617) 383-6136

New York Metropolitan Area
Nelson & Miller Associates, Inc.
342 Madison Ave., Room 830
New York, N.Y. 10017
(212) 681-9234

Southeast
Warren Langer Associates, Inc.
234 County Line Road
Gilbertsville, PA 19525
(215) 367-0820

Creative Computing will not be responsible for the return of unsolicited manuscripts, cassettes, floppy disks, program listings, etc. not submitted with a self-addressed, stamped envelope.

4-Year Index

A four-year cumulative index to *Creative Computing* and ROM is available. Articles are cross-referenced to both individual issues and collected volumes (*The Best of Creative Computing*, Vols. 1 and 2). Articles are classified by subject area and listed by title and author. Over 2000 items are included. \$1.00 postpaid in U.S., \$2.00 foreign. Creative Computing, P.O. Box 789-M, Morristown, N.J. 07960.

Back Issues

Back issues of *Creative Computing* are usually in stock for the current and previous volume. Prices on 1977 (Vol. 3) issues are \$2.00 each postpaid or three for \$5.00. 1978 (Vol. 4) and 1979 (Vol. 5) issues are \$2.50 each postpaid, three for \$7.00, or six for \$12.00.

Volumes 1 and 2 are available in book form, *The Best of Creative Computing*, Vols. 1 and 2. Each book is \$10.00 postpaid. Creative Computing, P.O. Box 789-M, Morristown, N.J. 07960

Nine back issues of ROM are available in a complete set for \$14.00 postpaid (\$17.00 foreign) from Creative Computing.

Microform

Creative Computing is available on permanent record microfilm. For complete information contact University Microfilms International, Dept. F.A., 300 North Zeeb Road, Ann Arbor, MI 48106 or 18 Bedford Road, London WC1R 4EJ, England.

Foreign Customers

Foreign subscribers in countries listed below may elect to subscribe with our local agents using local currency. Of course, subscriptions may also be entered directly to Creative Computing (USA) in U.S. dollars, (bank draft or American Express card). All foreign subscriptions must be prepaid.

Many foreign agents stock *Creative Computing* magazines, books, and software. However, please inquire directly to the agent before placing an order. Again, all Creative Computing products may be ordered direct from the USA — be sure to allow for foreign shipping and handling.

CANADA	Surface	Air
1-year	\$19	n/a
2-year	36	
3-year	52	

RS-232
Attn: George Spiteri
186 Queen St. W.
Toronto, Ontario M5V 1Z1, Canada

ENGLAND	£	£
1-year	13	22
2-year	25	43
3-year	36	63

CREATIVE COMPUTING
Attn: Hazel Gordon
27 Andrew Close
Stoke Golding, Nuneaton CV13 6EL
England

FRANCE	F	F
1-year	105	180
2-year	200	345
3-year	290	510

SYBEX EUROPE
14/18 Rue Planchat
75020 Paris, France

SWEDEN	kr	kr
1-year	105	180
2-year	200	345
3-year	290	510

HOBBY DATA
Attn: Jan Nilsson
Fack
S-200 12 Malmö 2, Sweden

GERMANY	dm	dm
1-year	46	78
2-year	88	152
3-year	128	224

HOFACKER-VERLAG
Ing. W. Hofacker
8 München 75
Postfach 437, West Germany

HOLLAND, BELGIUM	g1
1-year	90
2-year	175
3-year	250

2 x F IMPORT VAN BOEKEN EN TIJDSCHRIFTEN
Attn: M. F. deVreeze
Postbus 70198
1007 KD Amsterdam, Holland

AUSTRALIA	\$A	\$A
1-year	23	47
2-year	44	92
3-year	64	136

ELECTRONIC CONCEPTS PTY. LTD.
Attn: Rudi Hoess
Ground Floor, 55 Clarence St.
Sydney, NSW 2000, Australia

JAPAN	Y	Y
1-year	4800	9400
2-year	9200	18,400
3-year	13,500	27,200

ASCII PUBLISHING
305 HI TORIO
5-6-4 Minami Aoyama, Minato-ku
Tokyo 107, Japan

HONG KONG	HK\$	HK\$
1-year	115	235
2-year	220	460
3-year	320	680

COMPUTER PUBLICATIONS, LTD.
22 Wyndham St., 7th Floor
Hong Kong

PHILIPPINES	P	P
1-year	175	355
2-year	330	690
3-year	480	1,020

INTEGRATED COMPUTER SYSTEMS, INC.
Suite 118, Limketkai Bldg., Ortigas Ave.
Greenhills P.O. Box 483, San Juan
Metro Manila 3113, Philippines

KUWAIT	dinar	dinar
1-year	8.5	11.0
2-year	12.5	21.5
3-year	18.0	31.5

ASCON
Attn: Salah Zelneddin
P.O. Box 4052
Safat, Kuwait

OTHER COUNTRIES	\$23	\$39
1-year	44	76
2-year	84	112

CREATIVE COMPUTING
P.O. Box 789-M
Morristown, N.J. 07960, USA

THE BEST.



If you're not content with just playing games, **TBS** is producing applications software for your TRS-80 Level II that makes it a practical tool.

CHECKBOOK II by Alan Meyers is the finest program of its kind yet published. With superb graphic screen displays, it does everything necessary to keep your checkbook balanced. Data is input directly into a five-column screen display with a field for alpha or numeric codes. Editing is done easily in any or all columns. **CHECKBOOK II** will accurately balance and reconcile your checkbook, handling balances up to \$1,000,000. Your balance brought forward is always in memory. Outstanding checks are listed and easily saved. You can also search for an entry by any field except amount, and all checks with matching entries will be displayed and totaled. A numeric sort routine is included. Screen prints can be made to a line printer from almost any point in the program. In addition, the 32-48K version can write files to disk. This and the 16K version are included on the same tape. For \$18.50, **CHECKBOOK II** is the top of the line in personal checkbook programs.

INFORMATION SYSTEM by Dale Kubler is simply the best in-memory, data base manager on the market. It allows you to create files with up to ten categories per 'page', up to 40 characters per category and 200 characters total per page. Data from the keyboard is entered directly on a screen display of one entire page. Once entered, you can sort or search your entire data base by any category and have the information desired displayed on the screen. **INFORMATION SYSTEM** provides a thorough editing mode allowing changes by line without rewriting an entire file. Program your own printouts to almost any form you desire for line or serial printers. Screen prints from anywhere in the program are also available. **INFORMATION SYSTEM** creates either disk or cassette files depending on the version you use. Four versions are supplied with the program tape. From mail lists to recipes, for only \$24.50, this program

is the ideal information manager.

EXERCISER is for everyone. This program allows you to set your own physical fitness goals, then chart and analyze your progress toward these goals. Further, you may program an exercise regimen, then have the computer 'coach' you through your exercise routines. This system will allow you to use your computer to reinforce your effort to attain physical health. **EXERCISER** is really two programs in one. One measures your progress in jogging, swimming and bicycling and the other is for setting calisthenic regimens. It has long been known that to effectively structure an exercise program, it is necessary to think in terms of goals which can be met over a period of time. Whether you are training for the Boston Marathon or just wish for a minimum level of fitness, **EXERCISER** is designed to help you attain your goals. The price for this exceptional program is just \$12.50.

TBS has other great software for your TRS-80. **BASIC TOOLKIT, SYSTEM DOCTOR & TERMINAL CONTROL** are systems utilities. **BUSINESS MAIL LIST, DATA BASE MANAGER, CHECK REGISTER ACCOUNTING SYSTEM & ANALYSIS PAD** are strong applications for business. Don't forget the **LIBRARY 100**; 100 programs for only \$49.50. **TBS** also has **DISK HEAD CLEANERS** for **TRS-80** and **APPLE** and **GRAN MASTER DISKETTES**, the best on the market.

TBS is **YOUR COMPANY**, and to you we pledge to produce quality software at a price you can afford. The above products are available **NOW** at Computer Stores and Associate Radio Shack Stores nationwide or directly through us. For more information please contact us at the numbers below.



THE BOTTOM SHELF, INC.

(404) 939-6031 • P.O. BOX 49104-C • ATLANTA, GA 30359

CIRCLE 115 ON READER SERVICE CARD

Electronic Technologies And The Media Arts

A conference entitled **Developing Electronic Technologies: Applications to the Media Arts** will be held at the University of Maryland Baltimore County campus in Catonsville, Maryland the weekend of **November 10 and 11**. The conference is being funded by the National Endowment for the Arts and is under the direction of Stan VanDerBeek and Fred Stern of UMBC.

The central focus is on computer and video systems for artistic expression. It will include panel sessions, workshop/demos and screening of works.

For more information or a brochure call Ann King at 301-455-2163 or 455-2150.

Our Face Is "Green" Department

Doug Green, a teacher in Cortland, New York, wrote us a fine article on evaluating teacher-generated tests. He was under the strong impression, as a result of a conversation with the editor, that his article would be included in the education-oriented September issue. He spoke to a group of several hundred teachers at a conference and told them to look for his article in the September issue. Well, the article didn't make it, for one reason or another. To make matters even worse, it didn't make it into the October issue, either. However, we've finally got it into this issue, Doug...and sincerely hope those people haven't questioned your honesty and integrity too much. — JTC

Many organizational changes are analogous to re-arranging the deck chairs aboard the Titanic.

Robert's Rules
of Disorder

FREE SOFTWARE CATALOG

For a free 20-page catalog of Creative Computing Software for all computers circle 224 on the reader service card.

Hopefully...

The response to my piece "To All Programmers" in the September issue was astonishing. Most people pointed out, a bit gleefully, that I was wrong in saying that the word affect is always a verb. Indeed, it can be a noun meaning "the conscious subjective aspect of an emotion considered apart from bodily changes." I hope this mistake did not obscure my point which was that affect and effect have quite different meanings and cannot be used interchangeably.

I was also called to task for my parenthetical and incorrect use of the word hopefully. It may be hoped that in the future I will not subject the word hopefully to such misuse.

Since interest in correct and effective usage of language both in writing and programming is high among both authors and readers, I have asked a well-known lexicologist to prepare an occasional column for **Creative** which will deal with both usage in general and as applied to the computer field. Look for it in a month or two. — DHA

5th West Coast Computer Faire Scheduled for Middle of March

The 5th West Coast Computer Faire will be held in San Francisco's Civic Auditorium & Brooks Hall, March 14-16, 1980. This is the site of the just-completed 4th Computer Faire, which had over 14,000 attendees — in spite of a major gas shortage — as well as more than 100 conference speakers, and over 330 exhibits.

Exhibit space is now available and is being rented on a first-come, first-served basis. Exhibitors in the just-finished Faire had first choice at space and have already contracted for more than 30% of the booths currently offered.

A call for papers and participation has been issued for the 5th Computer Faire. Speakers are sought to address all topics related to microcomputing, consumer computers, social impacts of computing and more. Proposals for talks should be sent as soon as possible. Author's kits will be sent to everyone proposing to speak, and completed, final papers and abstracts must be received by the Computer Faire no later than November 30th. Accepted presentations will be published in the **Conference Proceedings of the 5th West Coast Computer Faire**.

Exhibitor and speaker information may be requested from the Computer Faire, 333 Swett Road, Woodside, CA 94062, (415) 851-7075.

The Second National Educational Computing Conference (NECC/2) Call For Papers

The Second National Educational Computing Conference is aimed at providing a forum for discussion between individuals at all levels and from all institutions with interests in educational computing. This second conference will be held at the Holiday Inn, Downtown at Scope, Norfolk, Virginia, June 23-25, 1980.

Papers are being solicited from individuals representing all academic disciplines and research areas in educational computing. Authors are invited to submit papers describing actual experiences with computer use in the classroom or the consequences of such use upon the educational process in general. Papers should report concrete results or be of a survey or tutorial nature which include a synthesis and thorough evaluation. Papers must be submitted in final form with only modest editorial revisions possible. No papers will be conditionally accepted subject to rewriting. Accepted papers must be retyped by the author in a form suitable for reproduction. Special forms will be supplied at time of notification of acceptance. Copyright release is a necessary condition for acceptance of a paper. Deadline is January 15, 1980. Send papers to:

Professor Richard Austing
Computer Science Department
University of Maryland
College Park, Maryland 20742
Notification of acceptance will be around March 1, 1980.

Our Face Is Red Department

Introduction to BASIC, reviewed in the August issue of **Creative Computing**, is published by Digital Equipment Corporation, not Digital Press, and orders should be addressed:

Introduction to BASIC
AA-01551-TK
Software Distribution Center
Digital Equipment Corporation
Maynard, MA 01754

The article by Jim McClure in the September issue ("CBASIC - A Review") states that updates to CBASIC can be obtained from Software Systems, P.O. Box 145, Sierra Madre, CA 91024 for \$5. The correct figure is \$15. We apologize for the error.

MORE COLOR. MORE SOUND. MORE GRAPHICS CAPABILITIES.



ATARI 400



ATARI 800

Compare the built-in features of leading microcomputers with the Atari personal computers. And go ahead, compare apples and oranges. Their most expensive against our least expensive: the ATARI® 400.*

Start with graphics capabilities. The ATARI 400 offers 128 color variations, 16 colors in 8 luminance levels. Plus 29 keystroke graphics symbols and 8 graphics modes. All controlled from a full 57 key ASCII keyboard. With upper and lower case. And the system is FCC approved with a built-in RF modulator. That's just for openers.

Now, compare sound capabilities. Four separate sound channels and a

built-in speaker. With the optional audio/digital recorder, you can add Atari's unique Talk & Teach® Educational System cassettes.

Here's the clincher. Solid state (ROM) software. For home management, business and entertainment. Or just plug in an Atari 10K BASIC or Assembler language cartridge and the full power of the computer is in your hands.

Memory? 8K expandable to 16K. And that's just for the ATARI 400 at a suggested retail of only \$549.99.

The ATARI® 800* gives you all that and much more.

User-installable memory to 48K. A full-stroke keyboard.

With a high-speed serial I/O port that allows you to add a whole family of smart peripherals. Including up to four individually accessible disk drives. And a high speed dot-matrix impact printer. And, the Atari Program Recorder is included with the 800 system. Suggested retail price for the ATARI 800 (including recorder) is \$999.99.

Make your own comparison wherever personal computers are sold.

Or, send for a free chart that compares the built-in features of the ATARI 400 and 800 to other leading personal computers.



PERSONAL COMPUTER SYSTEMS

1265 Barregas Ave. Dept. C, Sunnyvale, California 94086. Call toll-free 800-538-8547 (in Calif. 800-672-1404) for the name of your nearest Atari retailer.

CIRCLE 112 ON READER SERVICE CARD

NEC introduces The College Board.

Our educational TK-80A—the first complete 8080A based single board computer.

Here's the perfect system for all levels of computer education—from basic computing to advanced programming techniques.

It's a complete 8080A based computer on a single board. With a 25-key pad, 8-digit display, 1-8K byte EEPROM monitor, 1-4K byte RAM, and three 8-bit programmable I/O ports.

And it's fully expandable. Memory can be increased off-board to a total of 64K bytes. And a standard Kansas City interface lets you hook up a cassette for additional storage. If you need a terminal, a TTY or RS 232 interface can be easily attached.

What's more, 2 or 3 TK-80A boards can be connected for instruction in sophisticated programming techniques—such as distributed processing, parallel processing, and peripheral control.

And once students have mastered the TK-80A, they can easily apply what they've learned to process control, energy control systems, and environmental control and monitoring.

The TK-80A is not only supported by our thorough documentation, it's backed by our 90-day warranty on the entire board and one year warranty on the components.

And the price is only \$299.

At NEC Microcomputers, we've already built a reputation as one of the most reliable component suppliers in the industry. Now we're putting our reputation behind the first complete 8080A based computer on a board.

For more information on NEC's new college board, send in the coupon.

NEC
NEC Microcomputers, Inc.

1K Electrically Erasable PROM monitor—expandable to 8K on-board.

1K RAM—expandable to 4K on-board.

WESTERN REGION OFFICE, Orange, CA at (714) 633-2980; EASTERN REGION OFFICE, Melville, NY at (516) 293-5660; MIDWESTERN REGION OFFICE, Des Plaines, IL at (312) 296-7081; SOUTHERN REGION OFFICE, Dallas, TX.

REPS: Action Unlimited, Arlington, TX; Spring, TX; Cerco, San Diego, CA; Contact Sales, Inc., Burlington, MA; D/Z Associates, Inc., Denver, CO; Electronics Innovators, Inc., Minneapolis, MN; Eltron, Phoenix, AZ; Kaytronics Limited, Ville St. Pierre, QUEBEC, Concord, ONTARIO, Surrey, BRITISH COLUMBIA; Santana Sales, Costa Mesa, CA; Trident Associates, Inc., Sunnyvale, CA; Tri-Tronix, Albuquerque, NM; Tri-Tronix, NW, Mercer Island, WA.

DISTRIBUTORS: Almo Electronics Corp., Philadelphia, PA; Baltimore, MD; Bell Industries, Bellevue, WA; Century Electronics, Albuquerque, NM; Wheatridge, CO; Salt Lake City, UT; Diplomat/Westland, Inc., Sunnyvale, CA; Diplomat/Southland, Inc., Clearwater, FL; Diplomat/Lakeland, Inc., Elk Grove Village, IL; Diplomat/IPC of Mass., Chicopee Falls, MA; Diplomat, Holliston, MA; Diplomat/Northland, Inc., Farmington, MI; Diplomat/Electro-Com Corp., Minneapolis, MN; Diplomat/St. Louis, Inc., St. Louis.

Kansas City cassette interface at 300 or 1200 baud.

Bright 8-digit LED display.

Key pad with 25 real keys you can feel and hear.

Three 8-bit I/O ports for peripherals.

Industry standard μ PD8080AF microprocessor.

Fully buffered busses for system expansion.

Send me more information on the TK-80A.

Name _____

Position _____

School/Other _____

Address _____

City _____ State _____ Zip _____

Send to: NEC Microcomputers, Inc.
173 Worcester Street, Wellesley,
MA 02181 Tel. (617) 237-1910

MO: Diplomat/PC Corp., Tetonia, NJ; Mr. Laurel, NJ; Diplomat Electronics Corp., Woodbury, NY; Diplomat/Alta-Land, Inc., Salt Lake City, UT; Future Electronics Corp., Montreal, QUEBEC; Downview, ONTARIO; Ottawa, ONTARIO; Natick, MA; Hughes-Peters, Inc., Cincinnati, OH; Columbus, OH; Intermark Electronics, Sunnyvale, CA; Santa Ana, CA; San Diego, CA; KA Electronics, Dallas, TX; Kent Electronics, Houston, TX; G.S. Marshall, Sunnyvale, CA; Ganoga Park, CA; El Monte, CA; San Diego, CA; Phoenix, AZ; Marshall Industries, Farmingdale, NY; Wallingford, CT; Milgray Electronics, Inc., Freeport, NY; Orange, CT; Quality Components, Austin, TX; Houston, TX; Dallas, TX; Repton Electronics, Inc., Livonia, MI; Columbus, OH; Resco/Raleigh, Raleigh, NC; Semiconductor Specialists, Inc., Chicago, IL; Burlington, MA; Farmington, MI; Minneapolis, MN; Hazelwood, MO; Pittsburgh, PA; Dallas, TX; Milwaukee, WI; Sterling Electronics, Phoenix, AZ; Santa Clara, CA; San Diego, CA; N. Hollywood, CA; Baton Rouge, LA; Waltham, MA; Albuquerque, NM; Dallas, TX; Tukwila, WA; Summit Distributors, Inc., Buffalo, NY; Summit Elec. of Roch., Inc., Rochester, NY; Western Microtechnology, Cupertino, CA.

In "Your Basic Binary Search: Simple Data Base Techniques In BASIC" (July, 1979), there are two errors in the flow chart. In the decision block with L & U it should say "L > = U?" The decision block below that should read "[F] > K?"

No, you don't have weak eyes. If you were searching for that elusive program in our September PET column and couldn't find it, here it is:

Figure 1 - Better Cipher Program

```
10 PRINT "BETTER PET CIPHER PROGRAM"
20 DIM M$(20), C$(20)
30 INPUT "ENTER MESSAGE TO ENCODE OR DECODE: "; A$
40 AS=LEFT$(A$,1)
50 IF AS="E" OR AS="D" THEN
60 GOTO 30
70 INPUT "ENTER KEY: "; K$
75 KP=0:KL=LEN(K$)
80 IF AS="E" THEN 500
90 IF AS="D" THEN 1000

500 PRINT "ENTER YOUR MESSAGE TO ENCODE:"
510 PRINT "WHEN DONE: ";
520 FOR J=1 TO 20: M$(J)="": GOSUB 3000
530 IF BS="EXIT" THEN 550
540 M$(J)=BS: NEXT J
550 PT=1:PL=LEN(M$)
560 J=1
570 FOR S=1 TO J: C$(S)=M$(J)
580 FOR T=1 TO LEN(M$(S))
590 CS=MID$(M$(S),T,1): GOSUB 2000
600 C$(S)=CS(S)+C$
610 NEXT T
620 REM ADD NULLS
630 IF LEN(C$(S))-PRINT(LEN(C$(S))/5)=0 THEN 650
640 C$(S)=PRINT(LEN(C$(S))/5)+C$(S): GOTO 630
650 NEXT S: REM DISPLAY CODE GROUPS
660 PRINT "CODE GROUPS: ";
670 CO=0:DO=0
680 FOR S=1 TO J
690 CP=CG+S-1
700 PRINT MID$(C$(S),CP,S) " "; DO=DO+1
710 IF DO>5 THEN PRINT: DO=0
720 CO=CO+1: IF S=CG+LEN(C$(S)) THEN 680
730 CO=0: NEXT S
740 PRINT: PRINT "PRESS ANY KEY:"
```

```
750 GET AS: IF AS="" THEN 750
760 GOTO 500
1000 PRINT "ENTER YOUR CODE GROUPS WITH A SPACE"
1010 PRINT "BETWEEN EACH GROUP. 'EXIT' TO STOP. ";
1020 FOR J=1 TO 20: C$(J)="": GOSUB 3000
1030 IF BS="EXIT" THEN 1060
1040 C$(J)=BS: NEXT J
1050 J=J+1
1060 FOR S=1 TO J: M$(S)="":
1070 CT=0: FOR T=1 TO LEN(C$(S))
1080 CT=CT+1: IF CT>5 THEN CT=0: GOTO 1110
1090 CS=MID$(C$(S),T,1): GOSUB 2500
1100 M$(S)=M$(S)+CS
1110 NEXT T
1120 PRINT "YOUR MESSAGE: ";
1130 FOR S=1 TO J: PRINT M$(S): NEXT S
1140 PRINT "PRESS ANY KEY:"
1150 GET AS: IF AS="" THEN 1150
1160 GOTO 1000

2000 IF C$="" THEN RETURN
2010 KP=KP+1: IF KP>KL THEN KP=1
2020 K=ASC(MID$(K$,KP,1))+ASC(C$)-64
2030 IF K>95 THEN K=K-64
2040 IF K<32 THEN K=K+64
2050 C$=CHR$(K): RETURN

2500 IF C$="" THEN RETURN
2510 KP=KP+1: IF KP>KL THEN KP=1
2520 K=ASC(C$)-ASC(MID$(K$,KP,1))+64
2530 IF K<32 THEN K=K+64
2540 IF K>95 THEN K=K-64
2550 C$=CHR$(K): RETURN

3000 PRINT "BS="; BS: QS=CHR$(34)
3010 GET AS: IF AS="" THEN 3100
3020 FOR Z=1 TO 20: NEXT: PRINT "VS ";
3030 FOR Z=1 TO 20: NEXT: PRINT "OFF SP. IF ";
3040 GOTO 3010
3100 IF ASC(AS)=13 THEN PRINT: RETURN
3110 IF ASC(AS)=20 THEN 3160
3120 IF BS="" THEN 3160
3130 IF LEN(BS)=1 THEN BS=""
3140 IF LEN(BS)>1 THEN BS=LEFT$(BS,LEN(BS)-1)
3150 PRINT AS;
3160 IF AS=QS THEN PRINT QSCHR$(20);
3170 IF ASC(AS)=9 OR ASC(AS)=10 THEN 3010
3180 BS=BS+AS:PRINTAS;:GOTO 3010
```

The only sure thing about luck is that it will change.

Later yet, here's Al Weiss' Deck Shuffling from October's I/O:

```
100 DIM T(52), D(52,2)
110 REM
120 REM: ORIGINAL
130 REM: STATEMENTS
140 REM:
150 REM:
160 REM:
170 REM:
180 REM:
190 REM: SHUFFLE
200 FOR I=1 TO 52
210 I(I)=0
220 NEXT I
230
240 FOR I=1 TO 52
250 J=INT(52*RND)+1
260
270 IF I(I)<>0 GOTO 250
280 D(I,1)=INT((J-1)/13)+1
290 D(I,2)=J-13*INT((J-1)/13)
300 I(I)=1
310 NEXT I
320
330 REM:
340 REM:
350 REM:
360 REM:
370 REM:
380 REM:
390 REM:
400 REM:
410 REM:
420 REM:
430 REM:
440 REM:
450 REM:
460 REM:
470 REM:
480 REM:
490 REM:
500 REM:
510 REM:
520 REM:
530 REM:
540 REM:
550 REM:
560 REM:
570 REM:
580 REM:
590 REM:
600 REM:
610 REM:
620 REM:
630 REM:
640 REM:
650 REM:
660 REM:
670 REM:
680 REM:
690 REM:
700 REM:
710 REM:
720 REM:
730 REM:
740 REM:
750 REM:
760 REM:
770 REM:
780 REM:
790 REM:
800 REM:
810 REM:
820 REM:
830 REM:
840 REM:
850 REM:
860 REM:
870 REM:
880 REM:
890 REM:
900 REM:
910 REM:
920 REM:
930 REM:
940 REM:
950 REM:
960 REM:
970 REM:
980 REM:
990 REM:
1000 REM:
1010 REM:
1020 REM:
1030 REM:
1040 REM:
1050 REM:
1060 REM:
1070 REM:
1080 REM:
1090 REM:
1100 REM:
1110 REM:
1120 REM:
1130 REM:
1140 REM:
1150 REM:
1160 REM:
1170 REM:
1180 REM:
1190 REM:
1200 REM:
1210 REM:
1220 REM:
1230 REM:
1240 REM:
1250 REM:
1260 REM:
1270 REM:
1280 REM:
1290 REM:
1300 REM:
1310 REM:
1320 REM:
1330 REM:
1340 REM:
1350 REM:
1360 REM:
1370 REM:
1380 REM:
1390 REM:
1400 REM:
1410 REM:
1420 REM:
1430 REM:
1440 REM:
1450 REM:
1460 REM:
1470 REM:
1480 REM:
1490 REM:
1500 REM:
1510 REM:
1520 REM:
1530 REM:
1540 REM:
1550 REM:
1560 REM:
1570 REM:
1580 REM:
1590 REM:
1600 REM:
1610 REM:
1620 REM:
1630 REM:
1640 REM:
1650 REM:
1660 REM:
1670 REM:
1680 REM:
1690 REM:
1700 REM:
1710 REM:
1720 REM:
1730 REM:
1740 REM:
1750 REM:
1760 REM:
1770 REM:
1780 REM:
1790 REM:
1800 REM:
1810 REM:
1820 REM:
1830 REM:
1840 REM:
1850 REM:
1860 REM:
1870 REM:
1880 REM:
1890 REM:
1900 REM:
1910 REM:
1920 REM:
1930 REM:
1940 REM:
1950 REM:
1960 REM:
1970 REM:
1980 REM:
1990 REM:
2000 REM:
2010 REM:
2020 REM:
2030 REM:
2040 REM:
2050 REM:
2060 REM:
2070 REM:
2080 REM:
2090 REM:
2100 REM:
2110 REM:
2120 REM:
2130 REM:
2140 REM:
2150 REM:
2160 REM:
2170 REM:
2180 REM:
2190 REM:
2200 REM:
2210 REM:
2220 REM:
2230 REM:
2240 REM:
2250 REM:
2260 REM:
2270 REM:
2280 REM:
2290 REM:
2300 REM:
2310 REM:
2320 REM:
2330 REM:
2340 REM:
2350 REM:
2360 REM:
2370 REM:
2380 REM:
2390 REM:
2400 REM:
2410 REM:
2420 REM:
2430 REM:
2440 REM:
2450 REM:
2460 REM:
2470 REM:
2480 REM:
2490 REM:
2500 REM:
2510 REM:
2520 REM:
2530 REM:
2540 REM:
2550 REM:
2560 REM:
2570 REM:
2580 REM:
2590 REM:
2600 REM:
2610 REM:
2620 REM:
2630 REM:
2640 REM:
2650 REM:
2660 REM:
2670 REM:
2680 REM:
2690 REM:
2700 REM:
2710 REM:
2720 REM:
2730 REM:
2740 REM:
2750 REM:
2760 REM:
2770 REM:
2780 REM:
2790 REM:
2800 REM:
2810 REM:
2820 REM:
2830 REM:
2840 REM:
2850 REM:
2860 REM:
2870 REM:
2880 REM:
2890 REM:
2900 REM:
2910 REM:
2920 REM:
2930 REM:
2940 REM:
2950 REM:
2960 REM:
2970 REM:
2980 REM:
2990 REM:
3000 REM:
3010 REM:
3020 REM:
3030 REM:
3040 REM:
3050 REM:
3060 REM:
3070 REM:
3080 REM:
3090 REM:
3100 REM:
3110 REM:
3120 REM:
3130 REM:
3140 REM:
3150 REM:
3160 REM:
3170 REM:
3180 REM:
3190 REM:
3200 REM:
3210 REM:
3220 REM:
3230 REM:
3240 REM:
3250 REM:
3260 REM:
3270 REM:
3280 REM:
3290 REM:
3300 REM:
3310 REM:
3320 REM:
3330 REM:
3340 REM:
3350 REM:
3360 REM:
3370 REM:
3380 REM:
3390 REM:
3400 REM:
3410 REM:
3420 REM:
3430 REM:
3440 REM:
3450 REM:
3460 REM:
3470 REM:
3480 REM:
3490 REM:
3500 REM:
3510 REM:
3520 REM:
3530 REM:
3540 REM:
3550 REM:
3560 REM:
3570 REM:
3580 REM:
3590 REM:
3600 REM:
3610 REM:
3620 REM:
3630 REM:
3640 REM:
3650 REM:
3660 REM:
3670 REM:
3680 REM:
3690 REM:
3700 REM:
3710 REM:
3720 REM:
3730 REM:
3740 REM:
3750 REM:
3760 REM:
3770 REM:
3780 REM:
3790 REM:
3800 REM:
3810 REM:
3820 REM:
3830 REM:
3840 REM:
3850 REM:
3860 REM:
3870 REM:
3880 REM:
3890 REM:
3900 REM:
3910 REM:
3920 REM:
3930 REM:
3940 REM:
3950 REM:
3960 REM:
3970 REM:
3980 REM:
3990 REM:
4000 REM:
4010 REM:
4020 REM:
4030 REM:
4040 REM:
4050 REM:
4060 REM:
4070 REM:
4080 REM:
4090 REM:
4100 REM:
4110 REM:
4120 REM:
4130 REM:
4140 REM:
4150 REM:
4160 REM:
4170 REM:
4180 REM:
4190 REM:
4200 REM:
4210 REM:
4220 REM:
4230 REM:
4240 REM:
4250 REM:
4260 REM:
4270 REM:
4280 REM:
4290 REM:
4300 REM:
4310 REM:
4320 REM:
4330 REM:
4340 REM:
4350 REM:
4360 REM:
4370 REM:
4380 REM:
4390 REM:
4400 REM:
4410 REM:
4420 REM:
4430 REM:
4440 REM:
4450 REM:
4460 REM:
4470 REM:
4480 REM:
4490 REM:
4500 REM:
4510 REM:
4520 REM:
4530 REM:
4540 REM:
4550 REM:
4560 REM:
4570 REM:
4580 REM:
4590 REM:
4600 REM:
4610 REM:
4620 REM:
4630 REM:
4640 REM:
4650 REM:
4660 REM:
4670 REM:
4680 REM:
4690 REM:
4700 REM:
4710 REM:
4720 REM:
4730 REM:
4740 REM:
4750 REM:
4760 REM:
4770 REM:
4780 REM:
4790 REM:
4800 REM:
4810 REM:
4820 REM:
4830 REM:
4840 REM:
4850 REM:
4860 REM:
4870 REM:
4880 REM:
4890 REM:
4900 REM:
4910 REM:
4920 REM:
4930 REM:
4940 REM:
4950 REM:
4960 REM:
4970 REM:
4980 REM:
4990 REM:
5000 REM:
5010 REM:
5020 REM:
5030 REM:
5040 REM:
5050 REM:
5060 REM:
5070 REM:
5080 REM:
5090 REM:
5100 REM:
5110 REM:
5120 REM:
5130 REM:
5140 REM:
5150 REM:
5160 REM:
5170 REM:
5180 REM:
5190 REM:
5200 REM:
5210 REM:
5220 REM:
5230 REM:
5240 REM:
5250 REM:
5260 REM:
5270 REM:
5280 REM:
5290 REM:
5300 REM:
5310 REM:
5320 REM:
5330 REM:
5340 REM:
5350 REM:
5360 REM:
5370 REM:
5380 REM:
5390 REM:
5400 REM:
5410 REM:
5420 REM:
5430 REM:
5440 REM:
5450 REM:
5460 REM:
5470 REM:
5480 REM:
5490 REM:
5500 REM:
5510 REM:
5520 REM:
5530 REM:
5540 REM:
5550 REM:
5560 REM:
5570 REM:
5580 REM:
5590 REM:
5600 REM:
5610 REM:
5620 REM:
5630 REM:
5640 REM:
5650 REM:
5660 REM:
5670 REM:
5680 REM:
5690 REM:
5700 REM:
5710 REM:
5720 REM:
5730 REM:
5740 REM:
5750 REM:
5760 REM:
5770 REM:
5780 REM:
5790 REM:
5800 REM:
5810 REM:
5820 REM:
5830 REM:
5840 REM:
5850 REM:
5860 REM:
5870 REM:
5880 REM:
5890 REM:
5900 REM:
5910 REM:
5920 REM:
5930 REM:
5940 REM:
5950 REM:
5960 REM:
5970 REM:
5980 REM:
5990 REM:
6000 REM:
6010 REM:
6020 REM:
6030 REM:
6040 REM:
6050 REM:
6060 REM:
6070 REM:
6080 REM:
6090 REM:
6100 REM:
6110 REM:
6120 REM:
6130 REM:
6140 REM:
6150 REM:
6160 REM:
6170 REM:
6180 REM:
6190 REM:
6200 REM:
6210 REM:
6220 REM:
6230 REM:
6240 REM:
6250 REM:
6260 REM:
6270 REM:
6280 REM:
6290 REM:
6300 REM:
6310 REM:
6320 REM:
6330 REM:
6340 REM:
6350 REM:
6360 REM:
6370 REM:
6380 REM:
6390 REM:
6400 REM:
6410 REM:
6420 REM:
6430 REM:
6440 REM:
6450 REM:
6460 REM:
6470 REM:
6480 REM:
6490 REM:
6500 REM:
6510 REM:
6520 REM:
6530 REM:
6540 REM:
6550 REM:
6560 REM:
6570 REM:
6580 REM:
6590 REM:
6600 REM:
6610 REM:
6620 REM:
6630 REM:
6640 REM:
6650 REM:
6660 REM:
6670 REM:
6680 REM:
6690 REM:
6700 REM:
6710 REM:
6720 REM:
6730 REM:
6740 REM:
6750 REM:
6760 REM:
6770 REM:
6780 REM:
6790 REM:
6800 REM:
6810 REM:
6820 REM:
6830 REM:
6840 REM:
6850 REM:
6860 REM:
6870 REM:
6880 REM:
6890 REM:
6900 REM:
6910 REM:
6920 REM:
6930 REM:
6940 REM:
6950 REM:
6960 REM:
6970 REM:
6980 REM:
6990 REM:
7000 REM:
7010 REM:
7020 REM:
7030 REM:
7040 REM:
7050 REM:
7060 REM:
7070 REM:
7080 REM:
7090 REM:
7100 REM:
7110 REM:
7120 REM:
7130 REM:
7140 REM:
7150 REM:
7160 REM:
7170 REM:
7180 REM:
7190 REM:
7200 REM:
7210 REM:
7220 REM:
7230 REM:
7240 REM:
7250 REM:
7260 REM:
7270 REM:
7280 REM:
7290 REM:
7300 REM:
7310 REM:
7320 REM:
7330 REM:
7340 REM:
7350 REM:
7360 REM:
7370 REM:
7380 REM:
7390 REM:
7400 REM:
7410 REM:
7420 REM:
7430 REM:
7440 REM:
7450 REM:
7460 REM:
7470 REM:
7480 REM:
7490 REM:
7500 REM:
7510 REM:
7520 REM:
7530 REM:
7540 REM:
7550 REM:
7560 REM:
7570 REM:
7580 REM:
7590 REM:
7600 REM:
7610 REM:
7620 REM:
7630 REM:
7640 REM:
7650 REM:
7660 REM:
7670 REM:
7680 REM:
7690 REM:
7700 REM:
7710 REM:
7720 REM:
7730 REM:
7740 REM:
7750 REM:
7760 REM:
7770 REM:
7780 REM:
7790 REM:
7800 REM:
7810 REM:
7820 REM:
7830 REM:
7840 REM:
7850 REM:
7860 REM:
7870 REM:
7880 REM:
7890 REM:
7900 REM:
7910 REM:
7920 REM:
7930 REM:
7940 REM:
7950 REM:
7960 REM:
7970 REM:
7980 REM:
7990 REM:
8000 REM:
8010 REM:
8020 REM:
8030 REM:
8040 REM:
8050 REM:
8060 REM:
8070 REM:
8080 REM:
8090 REM:
8100 REM:
8110 REM:
8120 REM:
8130 REM:
8140 REM:
8150 REM:
8160 REM:
8170 REM:
8180 REM:
8190 REM:
8200 REM:
8210 REM:
8220 REM:
8230 REM:
8240 REM:
8250 REM:
8260 REM:
8270 REM:
8280 REM:
8290 REM:
8300 REM:
8310 REM:
8320 REM:
8330 REM:
8340 REM:
8350 REM:
8360 REM:
8370 REM:
8380 REM:
8390 REM:
8400 REM:
8410 REM:
8420 REM:
8430 REM:
8440 REM:
8450 REM:
8460 REM:
8470 REM:
8480 REM:
8490 REM:
8500 REM:
8510 REM:
8520 REM:
8530 REM:
8540 REM:
8550 REM:
8560 REM:
8570 REM:
8580 REM:
8590 REM:
8600 REM:
8610 REM:
8620 REM:
8630 REM:
8640 REM:
8650 REM:
8660 REM:
8670 REM:
8680 REM:
8690 REM:
8700 REM:
8710 REM:
8720 REM:
8730 REM:
8740 REM:
8750 REM:
8760 REM:
8770 REM:
8780 REM:
8790 REM:
8800 REM:
8810 REM:
8820 REM:
8830 REM:
8840 REM:
8850 REM:
8860 REM:
8870 REM:
8880 REM:
8890 REM:
8900 REM:
8910 REM:
8920 REM:
8930 REM:
8940 REM:
8950 REM:
8960 REM:
8970 REM:
8980 REM:
8990 REM:
9000 REM:
9010 REM:
9020 REM:
9030 REM:
9040 REM:
9050 REM:
9060 REM:
9070 REM:
9080 REM:
9090 REM:
9100 REM:
9110 REM:
9120 REM:
9130 REM:
9140 REM:
9150 REM:
9160 REM:
9170 REM:
9180 REM:
9190 REM:
9200 REM:
9210 REM:
9220 REM:
9230 REM:
9240 REM:
9250 REM:
9260 REM:
9270 REM:
9280 REM:
9290 REM:
9300 REM:
9310 REM:
9320 REM:
9330 REM:
9340 REM:
9350 REM:
9360 REM:
9370 REM:
9380 REM:
9390 REM:
9400 REM:
9410 REM:
9420 REM:
9430 REM:
9440 REM:
9450 REM:
9460 REM:
9470 REM:
9480 REM:
9490 REM:
9500 REM:
9510 REM:
9520 REM:
9530 REM:
9540 REM:
9550 REM:
9560 REM:
9570 REM:
9580 REM:
9590 REM:
9600 REM:
9610 REM:
9620 REM:
9630 REM:
9640 REM:
9650 REM:
9660 REM:
9670 REM:
9680 REM:
9690 REM:
9700 REM:
9710 REM:
9720 REM:
9730 REM:
9740 REM:
9750 REM:
9760 REM:
9770 REM:
9780 REM:
9790 REM:
9800 REM:
9810 REM:
9820 REM:
9830 REM:
9840 REM:
9850 REM:
9860 REM:
9870 REM:
9880 REM:
9890 REM:
9900 REM:
9910 REM:
9920 REM:
9930 REM:
9940 REM:
9950 REM:
9960 REM:
9970 REM:
9980 REM:
9990 REM:
10000 REM:
```

CAN YOU OUTSMART OUR COMPUTER?

Don't be too sure. The computer built into Parker Brothers game Code Name: Sector™ is capable of making thousands of calculations per second. It's as powerful as early computers that filled entire rooms and sold for millions of dollars. And, while it gives you clues to track down and sink a hidden electronic submarine, it also helps the sub escape and counter-attack. That's the catch that makes every game a real challenge. Whether you're playing alone or against others, your toughest opponent is the computer. Code Name: Sector™, the electronic board game from Parker Brothers. It's a game with a mind of its own.

PARKER BROTHERS
©1978, Parker Brothers, Beverly, MA



CIRCLE 183 ON READER SERVICE CARD

"How I Spent My Summer Vacation"



"My father brought home a computer. It was fun. The computer was like a teacher. I learned how to do graphs and lots of other things too. I had a really good time."

Sonja Richman - Age 9

Sonja used Program Design educational software on her TRS-80. PDI programs and games teach subjects like programming, reading, and grammar. Kids and adults like PDI because the programs keep them involved and entertained while they learn.

PDI has courses for all ages. Some of Sonja's favorite courses are **Graph Builder**, **Story Builder**, and **Memory Builder: Concentration**. For her parents, we have courses like **Step By Step** to teach them programming and **Spelling Builder**.

Guaranteed-to-load cassettes for APPLE, PET, TRS-80 Level II, ATARI

Send for our flyer. And see Program Design software at participating Computerlands and other fine computer stores.



Braih Buggy is a ruggedly-built motorized, off-road stylized vehicle that can be programmed by the user. Eight keys are used to enter up to a 24-step program. Each program step is programmed with two keys: TDU (Time/Distance Unit) and Directional Command. One "TDU" represents approximately one-half second of travel in a particular direction or a

The same programs may be run over and over again, by simply pushing the GO Key. Moving the PRO-RUN Switch or turning off the main power switch erases the program.

Forward 1, Right 15
Repeat last 2 steps
Repeat last 2 steps
Repeat last 2 steps

CIRCUIT BREAKER PRICE SLASHING

16K MEMORY UPGRADE KITS

- 300 NS for TRS-80* \$69.00
- 250 NS for TRS-80*, Apple II, Sorcerer (specify) \$75.00
- 200 NS for TRS-80*, Apple II, Sorcerer (specify) \$85.00

All kits complete with jumpers and instructions.
90 DAY WARRANTY

LETTER QUALITY HIGH SPEED PRINTER

NEC Spinwriter
\$2679.00



Includes TRS-80* interface software, quick change print fonts, 55 cps, bidirectional, high resolution plotting, graphing, proportional spacing. 90 DAY WARRANTY.

TRS-80* COMPATIBLE HARDWARE

DISK DRIVES

More capacity than Radio Shack 35 track (80K Bytes) drives. Fully assembled and tested. Ready to plug-in and run the moment you receive it. Can be intermixed with each other and Radio Shack drive on same cable. TRS-80* compatible silver enclosure. 90 DAY WARRANTY.

CCI-100 40 Track (102K Bytes)	\$324.00
CCI-200 77 Track (197K Bytes)	\$594.00
2 Drive Cable	\$25.00
4 Drive Cable	\$35.00

PRINTERS

779 CENTRONICS TRACTOR FEED PRINTER \$1050.00
Same as Radio Shack line printer

701 CENTRONICS TRACTOR FEED PRINTER \$1499.00
2 1/2 times faster than line printer, full 132 characters, carriage bell tone.

P1 CENTRONICS PRINTER \$349.00
Same as Radio Shack quick printer.

CENTRONICS CABLE for TRS-80* \$39.00
For use with above printers.

PAPER TIGER (IP440) Up to 198 cps \$ 994.00
With 2K Buffer and Graphics \$1189.00

HILOT DIGITAL PLOTTER by Houston Instrument \$ 995.00
X-Y Plotter, RS-232-C or Parallel Interface.
7" x 10" plot size. Multi-colored pens included.

TRS-80* COMPLETE SYSTEMS

TRS-80* LEVEL II-4K	reg. \$540.00	\$494.00
TRS-80* LEVEL II-16K with 10 key keypad	reg. \$799.00	\$764.00
TRS-80* Expansion Interface		\$254.00
TRS-80* RS-232-C Interface		\$84.00

MISCELLANEOUS

TRS-232 by SMALL SYSTEMS SOFTWARE RS-232-C or Teletype Current Loop output from cassette port. \$49.00

CAT MODEM \$169.00
Originate and answer same as Radio Shack Telephone Interface II.

DISK OPERATING SYSTEMS

Radio Shack DOS 2.2—No key bounce \$14.95

NEWDOS by Apparat—No key bounce \$49.95

Enhancements to DOS 2.1, enhanced RENUM, BASIC variables and constants locator, enable/disable passwords, automatic validity check for disk write, load and save up to 30% faster, diskette space allocated in 1-granule increments instead of 2, BASIC open "E" allows additions to sequential files, "JKL" option outputs screen display to printer, DOS commands executable from BASIC, one-step entry to BASIC from DOS. LIST, EDIT, and DELETE abbreviations. BASIC scrolling.

NEWDOS "PLUS" by Apparat \$99.95

NEWDOS plus the following functions: enhanced DIRCHECK command, improved EDITOR, ASSEMBLER, DISASSEMBLER, SUPERZAP. Machine language RELOCATOR, LEVEL I on disk.

DOS 3.0 by the original author of 2.1 \$49.95

No key bounce. Check EOF, write EOF, SEEK, REREAD, REWRITE, LOC, variable length records, SKIP, disk logging of messages, BOOT, CHAIN, PAUSE, PURGE, SET, RESET, ROUTE, RUN and LOAD for 1 drive system. XFER, FORMAT w/o ERASE. DIR from BASIC, PATCH, LINK, user defined keys, key auto repeat, upper and lower case driver, shift lock, RS-232 drivers, MULTI PROTOCOL COMMUNICATIONS.

DISKETTE TRS-80*

BUSINESS SOFTWARE BY SBSG

Free enhancements and upgrades to registered owners for the cost of media and mailing. 30 day free telephone support from vendor. User references supplied upon request.

Fully Interactive Accounting Package: Requires 2, 3, or 4 drives. Includes General Ledger, Accounts Payable, Accounts Receivable, and Payroll. Report generating. Well documented and fully tested by accountants.

Complete package (Requires 3 or 4 drives)	\$389.00
Individual Modules (Require 2 or 3 drives)	\$99.00

Inventory II: Requires 2 or 3 drives. Handles up to 1000 items per disk drive. Reports include complete activity, inventory, listing, and minimum quantity search. \$95.00

Mailing List Name & Address II System: Requires 2 drives. Use with Electric Pencil files for automatic insertion of name, address and greetings in letters. Has ability to print envelopes. Menu driven. Includes enter, delete, update, search, extract, merge and print. Up to 1250 names per diskette. Will sort up to 600 names in 7 minutes. 40 page manual. Zip code sort is excellent for bulk mail applications. \$129.00

Intelligent Terminal System ST-80 III: Enables a TRS-80* to act as a dial-up terminal on any standard time sharing network. Provides a TRS-80* with control key, ESC Key, Repeat Key, Rub Out Key, Break Key, full upper and lower case support, selectable printer output and program selectable transmission rates. \$150.00

Note: SBSG maintains a time-sharing computer where you can dial-up and leave your problems, 24 hours, 7 days a week.

Word Processing System: The Electric Pencil from Michael Shrayor. Diskette \$150.00
Cassette \$99.00

File Management System: For specialized storage needs. Sorts files in ascending or descending order on 3 separate fields. Scannable. Some applications have been fixed assets, phone numbers, names, slides, albums. Selectively totals numeric and dollar fields. Display and print capability. \$49.00

MMSFORTH System Diskette: A complete professional FORTH system. Requires 16K TRS-80* and 1 drive. \$45.00
Book on FORTH. Contains documentation. \$15.00

The CPU SHOP

TO ORDER CALL TOLL FREE 1-800-343-6522

Massachusetts residents call 617/242-3350

For detailed technical information, call 617/242-3350

Hours: 10 AM - 6 PM (EST) Monday - Saturday

*TRS-80 is a Tandy Corporation Trademark *Requires Radio Shack TRSDOS*

39 Pleasant Street, Dept. CG-11
Charlestown, Massachusetts 02129

Freight collect, F.O.B.
Charlestown

Massachusetts residents add
5% sales tax

Dealer Inquiries Invited



CIRCLE 118 ON READER SERVICE CARD

and have a square traced out. Just like LOGO, but alas it is not to be (at least not this year).

Big Trak plays a cute tune at the start and end of executing a command sequence and signals you to shut it off if you ignore it for more than 30 seconds. A nice rugged toy at a somewhat rugged price of around \$43. The trailer wasn't available at the time of testing — it hitchhikes to Big Trak and dumps its load for another \$20 or so.

Kids loved both Big Trak and Brain Buggy — you will too. Recommended.



Computer Perfection from Lakeside

One of the most heavily promoted games of this season, Computer Perfection, is attractive and well designed, but proved to be an enigma to our panel of users. For some kids, it was their favorite game; other people found it extremely frustrating. The game turns on when the translucent blue dome cover is rolled back. It has two solitaire games, and two for two players. All games may be played at any of three skill levels.

The object of most of the games is to light all 10 lights (arranged in an 8" sphere) in the proper order with the least number of moves. As you press one of the 10 buttons, also in a circle, one of the lights will flash on and off. By a combination of trial-and-error and deduction you must light all the lights in sequence. Game 2 has the same object except if you make a mistake, you start over. In the two player games, each player tries to light his or her half circle of 5 lights. Delay more than 12 seconds and you lose a point or a turn. Forget to close the lid after you finish playing and the game sounds a warning signal, a nice battery-saving feature.



Maniac by Ideal

Maniac is designed for two to four players ages eight and up, and consists of "four totally different electronic challenges, each ingeniously designed to test your reflexes, speed and accuracy." Maniac has four paddles surrounding a LED display. The first challenge is Musical Maniac in which Maniac plays a series of random tones accompanied by a flashing pattern. Players race to press their paddles as soon as the beeps stop. In another challenge, Look Twice, Maniac creates a pattern in light. Next, three more random patterns, one of which may or may not be the same as the original are displayed. Players press the paddle when the original pattern is repeated or after the third pattern disappears if the original pattern is not repeated. The remaining challenges are similar combinations of light and sound.

After each round, Maniac displays each player's cumulative score; the first player to accumulate 25 points wins. We found that each of us had a favorite challenge at which he or she was particularly successful and at least one which he or she found very difficult. The difficult ones became very frustrating after awhile. Maniac was fun for a while, but as primarily a game of reflexes, not one of our favorites for long term enjoyment.

Zodiac by Coleco

If you're the type who picks up the newspaper and immediately turns to the horoscope column to see what the stars have in store, you'll probably be fascinated by Coleco's Zodiac, the Astrology Computer.

The computer itself, contained in a round plastic case with keys and an LED display on top, must be

used in conjunction with the 80-page manual which provides detailed instructions and interpretations. Using Zodiac, one can cast a horoscope, plot a preview of a future date, or ask advice regarding one's activities in any of 96 subject areas.

We did our own horoscopes and found that of the 15 or 20 descriptive statements in each, several were general enough that they could apply to just about anyone and a couple were completely inaccurate, but the majority, taken together, provided a pretty good analysis of the subject's personality. That one of us was "unorthodox, anti-establishment and impatient at times," for example, came as no surprise, but we had a hard time taking seriously the assertion that the other "wants to rule by 'divine right.'" The preview and advice modes were much more general, and, hence, more difficult to test.

Coleco reminds us throughout the manual, "Astrology guides—it does not rule!" And there are probably better ways to plan your life, but Zodiac is entertaining, and might be an interesting guest at your next party.



Astro by Kosmos

Astro is a hand-held "computer" which can provide a natal horoscope, an estimate of astrological compatibility for any two people, or a daily horoscope. In its more pragmatic moments it serves as a four-function calculator.

To obtain personal horoscope information, the user need only key in the date of birth. Astro's display then flickers for a moment or two and prints out four sets of code numbers which indicate the position of the

A Beautiful Way To Interface



IQ 140

SOROC's first and foremost concern, to design outstanding remote video displays, has resulted in the development of the IQ 140. This unit reflects exquisite appearance and performance capabilities unequaled by others on the market.

With the IQ 140, the operator is given full command over data being processed by means of a wide variety of edit, video, and mode control keys, etc.

The detachable keyboard, with its complement of 117 keys, is logically arranged into 6 sections plus main keyboard to aid in the overall convenience of operation. For example, a group of 8 keys for cursor control / 14 keys accommodate numeric entry / 16 special function keys allow access to 32 pre-programmed commands / 8 keys make up the extensive edit and clear section / 8 keys for video set up and mode control / and 8 keys control message and print.

Two Polling options available: 1) Polling compatible with Lear Siegler's ADM-2. 2) Polling discipline compatible with Burroughs.

IQ 120

The SOROC IQ 120 is the result of an industry-wide demand for a capable remote video display terminal which provides a multiple of features at a low affordable price.

The IQ 120 terminal is a simple self-contained, operator / computer unit.

The IQ 120 offers such features as: 1920 character screen memory, lower case, RS232C extension, switch selectable transmission rates from 75 to 19,200 bps, cursor control, addressable cursor, erase functions and protect mode. Expansion options presently available are: block mode and hard copy capability with printer interface. The IQ 120 terminal incorporates a 12-inch, CRT formatted to display 24 lines with 80 characters per line.

SOROC
TECHNOLOGY, INC.

165 FREEDOM AVE., ANAHEIM, CALIF. 92801

(714) 992-2860 / (800) 854-0147

CIRCLE 209 ON READER SERVICE CARD

CCA Data Management System

for

TRS-80 * APPLE-II * MICROPOLIS

- Maintains ALL of your data files. Files such as inventory, mailing lists, payroll, A/R, A/P, patient history, and customer lists are easily processed. Uses for the CCA DMS are limited only by your imagination.
- Data in any file can be added, updated, deleted, inspected, or scanned for.
- Produces automatically formatted reports or mailing labels on the screen or the printer. User may select fields, titles, editing, totals, sub-totals, and more.
- Files may be sorted into any sequence using up to 10 sort keys.
- Extensive yet easy to understand documentation.
- A professional, proven system - in the field since early 1978.

SYSTEM	STORAGE REQUIRED	MAX RECDS PER FILE	PRICE
TRS-80	32K	2400	\$74.95
APPLE II with ROM APPLESOFT	32K	3500	\$74.95
APPLE II without ROM APPLESOFT	48K	3500	\$74.95
MICROPOLIS	32K	1000	\$150.00

Creative Computer Applications
2218 Glen Canyon Road
Altadena, CA 91001
(213) 798-4529



CIRCLE 138 ON READER SERVICE CARD

DEALER
INQUIRIES
INVITED

Sun, Mercury, Venus and Mars on the day of birth. A quick check of the accompanying handbook reveals the significance of these locations in determining the personality of the subject.

The second mode of operation allows one to "determine the compatibility between any two people" by entering both birth dates and then checking a series of four lights on Astro's dial: green lights indicate personality traits which are similar, yellow lights those which are different. Using the handbook, the user may then proceed to an in-depth personal compatibility analysis which answers 16 questions such as "Do you enjoy or appreciate the way I think?"

A third use of Astro is to determine a daily horoscope. Again, yellow and green lights indicate similarities and differences between the prevailing influences and the subject's personality traits.

While not nearly as detailed or complete as Zodiac, Astro does provide a list of references from which one can learn more about astrology and, presumably, make more complete use of the information provided by the computer. It is also much more compact and quieter than Zodiac.

Mini-bio by Kosmos

Mini-bio is a tiny ($2\frac{1}{2}$ " x $4\frac{3}{4}$ " x $\frac{1}{4}$ ") calculator/computer designed to provide the user with personal bi-rhythm data. Entering the date for which the information is desired and the subject's date of birth causes three numbers representing days in the physical, emotional and intellectual cycles to appear on the display.

By referring to the manual (which is larger than the calculator and offers instructions in four languages), the user can determine whether the day is "clear," one on which caution or "mini-caution" should be exercised, or a "recharge period" for each of the cycles.



Mini-bio will also compute the "average lifetime compatibility/similarity ratios" for any two people, or daily compatibility/similarity ratios. We checked the ratios for one happily married couple we know and discovered that they should probably never have gone on their first date—but then Kosmos assumes no responsibility for decisions made based on the information obtained from Mini-bio.

We were unable to set the clock included in the little machine, so are unable to comment on its accuracy, but, assuming the clock can be set for the correct time, a quick look at a map on the back of the case gives the user a code which can be used to find out the time anywhere in the world. The stopwatch function worked nicely, as did the four-function calculator.

Astro and Mini-bio, at \$49.95 and \$79.95 respectively, are clever gadgets, but whether they are worth the price depends on how much one values the information they provide.



Microvision by Milton Bradley

This hand-held simulated video game has a 16x16 pixel LCD display about 1.4" square. The game is supplied with Blockbuster, M-B's version of Breakout. A small knob at the bottom moves the paddle back and forth across the bottom of the display to hit the ball. At the beginning, you select 1, 3, 5, 7, or 9 balls, slow or fast speed (most players found "slow" to be more than challenging), and paddle size (again,

most players found the large paddle size enough of a handful). Despite the small display size and only three rows of blocks to eliminate, the game was good fun and provided an ample challenge. Actually, if you hit the ball when it first appears, it's less difficult to keep it in play, but it's tough to catch it that first time down.


We didn't try any of the other Microvision cartridges, but five others are promised which, in their prototype form at the Toy Fair, looked like good fun. We had some problems with the display on our early production sample of Microvision, but were assured by M-B that the problem was cured in units released to stores and that they were guaranteed also. This sounds okay, but our advice would still be to play it if possible before taking it home.



Astro War by Mini Labs

Astro War consists of a 5" x 7" plastic tray with a 9 volt battery and LED flasher at the top and a 4" x 4" surface for the program and game sheets and plastic overlay. Eight games are included — target probe, space maze, black hole, etc. — but all are programmed the same way. One player blackens 10 to 15 random squares on the program sheet. This is placed face down on the conducting grid mat with a game sheet and plastic overlay to write on placed on top (see diagram). Players then take turns trying to find their way through a maze, out of a black hole, or



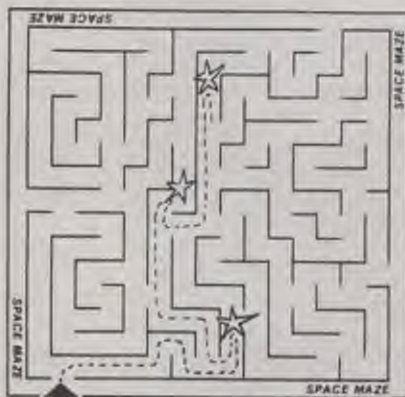

between two star bases without lighting the Astro Flash. Lighting the flash means different things in each game and can sometimes hinder, sometimes help the player. One minor problem was having to erase the overlay after each game — be sure you have a large eraser on hand. Nevertheless, we found the game a pleasant change from the scores of preprogrammed hand-held games. Recommended for age 8 and up.



Touch Me by Atari

This compact hand-held game (3"x5"x0.8") is modeled on last year's huge success, Simon, which was, of course, modeled on Atari's coin-operated game of Touch Me. Touch Me plays three variations of the game of remembering and repeating longer and longer sequences of lights and tones. Each game has four skill levels corresponding to sequences of 8, 16, 32, and 99 signals. Most players could easily remember an 8-signal sequence; rarely did anyone achieve more than 32, so this game possesses ample challenge. A nice feature is

that Touch Me records the highest score during one powering up of the game; players can use this to try to beat the best record among a group of friends. In the second variation, players each add one to the sequence of signals, while the third variation is an elimination type of game for two, three or four players.



Soccer by Mattel

There is no way you can figure out this game without instructions. And even after reading the instructions this one isn't easy. You move your little LED blip/player around with four directional keys. Unfortunately, you only have one player and your opposition, played by the computer, has five and a goalie which to keep you from scoring. The object is to get your player up to a position close to the goal and press the "kick" key quickly before one of the defensives can respond, and hope that your ball lands in the goal. If it does you are rewarded with a pleasant little musical tune, if it doesn't it generally goes to one of the opponent's players, although the instructions state that by cleverly positioning your player you can catch a rebound. In half an hour we were unable to get a single rebound except by dumb luck. After each play the referee blows a whistle signalling loss of ball possession. There are also clicking noises which indicate that the clock is running, and beep tones, double whistles and triple whistles all with their own meanings. A cute game, but not nearly as absorbing as baseball or some of the other Mattel games we reviewed last season and that are still on the market.



Computer Bowling by Vanity Fair

Speaking of games of reflex and eye/hand coordination, another example is Computer Bowling. In this nice, large game (15" x 6" x 3"), an illuminated LED "ball" oscillates back and forth across the end of the alley. At any point, it may be released by pressing the large release bar. Sequentially illuminated LED's show the travel of the ball down the alley. As pins are hit, the lights go out. Releasing the bar controls the degree of hook or slice. Sound effects simulate a rolling ball and pins falling down. Ten frames may be rolled either solo or against an opponent with standard scores being displayed. To win, a good eye is more helpful than logic or strategy.

Foto-Electronic Bowling by Cadaco

This larger-than-average game (15 x 4.5 x 3") combines electronics and physical action. To play, you aim and then strike (hard) a plastic handle (1 x 2.7") at the bottom of the game. This propels a steel ball toward the "pins," represented by 10 LED's, at the end of the alley. LED's go out showing which, if any, pins were toppled. A digital scoring mechanism keeps score for one or two players. A beep registers for each pin felled while ends of frames, spares, strikes, and misses each have their own distinctive melodies. Some players objected to the force needed to strike the handle and launch the ball but we found that an ashtray or book placed under one end of the unit made things a bit easier. Kids, on the other hand, liked to strike the handle with four fingers or even a fist and thought the game was just fine. Since the two 9-volt batteries are powering 10 LED's, a digital display and fairly loud speaker, we recommend alkaline cells.

16K BYTES OF MEMORY, SPEECH,
ACTION SOUNDS, MUSIC
AND COLOR



FCC, CSA
AND UL APPROVED

If you're thinking about a Home Computer, make sure it's not just a game

Two years ago we wrote a piece on the most startling product of the decade. The first personal computer. It actually brought the miracle of computing power within reach of small businesses. At less than \$1000, it was even affordable for home use.

That was two years ago. Today, that same unit, and other second and third generation models are still being sold. Enter now Interact's fourth generation American-made personal computer with total sound, color, 16,000 bytes or words of usable memory, and superb ease of handling at hundreds of dollars less than any comparably equipped computer.

GIANT COMPUTER HARDWARE

Beneath its cover is the Intel 8080[®] microprocessor brain—a powerful logic component used in computers costing tens of thousands of dollars. Interact loads data up to 5 times faster than most other compacts. Its 8080 brain does all of the complex data saving, processing and retrieval chores. All that's left is typing in the data through the 9 inch, 53-key standard typewriter keyboard.

WHY IT COSTS LESS

Since the unit performs in color, it is designed to hook up to any TV antenna terminal. If we included a color screen (CRT), we'd have to charge more. Witness the 16K Radio Shack Model. It's only black and white, and with its screen that isn't even a TV, it costs \$899.00. Ours, with full sound and color is several hundred dollars less. Interact full sound is generated three ways: There are game action sounds from the microprocessor, tunes within the programs and actual speech and music from any cassette software. In fact, it is the only computer able to transmit full sound through a TV. Image resolution is superb.

THE MOST EFFICIENT BUSINESS TOOL EVER

Interact[®] comes ready to handle a wide range of business applications. Its Level II Basic, and 16K byte system capacity give you the instruction set and the room to write your own programs for payroll, inventory, client records, etc. For accountants, attorneys, doctors, salespeople, and small businesses, it's a lot of computer for very little money.

For the enlightened computer expert, our Level II Basic is Interact's version of the Microsoft[™] and is equivalent to all Level II programs currently available. The program includes: a super-set of operations in floating point with integer and string arrays, direct memory access, direct statement execution, two character variable names, user definable functions, multi-statement lines, editing, scrolling, file management, and more.

AN INCOMPARABLE SCHOOL TEACHER

Since it can talk, play music and perform in color, Interact is a phenomenal teacher.

That's why High/Scope, an educational research foundation, was commissioned to develop an exclusive Language Arts program for it. The 8-unit program ranges from Letter Recognition for preschoolers through Word Root, Grammar, Critical Reading and Writing exercises for the 8 to 15 year old. Students listen, take notes and prepare assignments through the computer. Similar math and foreign language programs are also being prepared. By comparison, any one of these courses given by a tutor or commercial school could easily cost as much as the computer itself.



IT'S A BRILLIANT MUSIC TEACHER

A comprehensive music program and a piano keyboard overlay turn the computer into a perfect pitch maestro. You can practice, write a tune or record. To create a melody, you can select both key and tempo. A staff is displayed on which to write your song, note by note, complete with rests and values. Play the composition back; correct any note; instantly transpose it to another key; or store it on a blank cassette for later revision. A student can listen to his lesson and transpose it into another key for use with F, B^b, E^b horns, etc. The youngster then plays along in the right key, in the correct meter. It's a fantastic application.

OF COURSE, IT PLAYS GAMES

Interact is a total entertainment center with color, sound, and music. There are Chess, Backgammon, Hangman, Regatta Races, Concentration, Trailblazers, Blackjack, Star Track—games that would cost any arcade owner \$2000 or more. Challenge the computer or another opponent. Each game will bring family and friends together for hours of quality fun.

FCC AND CSA APPROVED FOR YOUR TV

The Interact computer, with built-in storage and programmability, is FCC and CSA approved for attachment to any TV. It is UL listed and operates on standard 110V household current. It's portable, too; weighs 12 pounds and is only 19" L x 12" W x 8" D.

SPECIAL OFFER—OVER \$300 WORTH OF FREE PROGRAMS—INCLUDING LEVEL II

Interact is exceptional. But, there is just no way to prove it, unless you are enjoying it in your own home and business. You have to try it. That's why we are giving you 14 different full color and sound programs FREE—including Edu-Basic and the Basic Level II program for advanced applications. It's our way of backing up everything we've said and making it worth your while to check it out for yourself. Your \$300 FREE value includes:

Edu-Basic[™] • Level II Basic • Blackjack • Compute-A-Color[™] • Hangman[™] • Knockdown[™] • Trailblazers[™] • Dogfight[™] • Showdown[™] • Regatta[™] • Concentration • Add-Em-Up[™] • Computer Maze[™] • Blorhythm[™] and 1 Blank Data Tape.

Fourteen programs are actually more than other computers have to offer. They're yours FREE with your purchase of the Interact. If, after 15 days you are not satisfied with your Interact, you may return it for a prompt refund of the purchase price. Sorry, but you'll have to return the 14 programs and the data cassette also. The unit is backed by a full 90 day parts and labor limited factory warranty.

CREDIT CARD ORDERS CALL TOLL FREE

800-621-5809

ILLINOIS RES: 800-972-5858
24 HOURS—7 DAYS/WEEK

☐ Please send me the Interact Computer, with 2 Hand Controls, connecting RF adapter and the 14 Free Program Library—including Basic Level II and 1 Blank Data Tape. If not satisfied, I can return same for a prompt refund within 15 days.

☐ I enclose \$588.00 plus \$17.95 shipping and insurance. Allow 2-3 week delivery.
(Ill. residents add 5% tax.)

☐ I also want the following programs:

☐ Star Track	\$24.95
☐ MicroChess (vs. computer)	\$24.95
☐ VideoChess (vs. opponent)	\$19.95
☐ Backgammon	\$24.95
☐ Reversi	\$19.95
☐ Music Maestro	\$24.95

☐ Total amount enclosed \$

☐ Check ☐ Money Order
☐ Charge My Credit Card:
☐ American Express ☐ Master Charge ☐ Carte
☐ BankAmericard/Visa ☐ Diners Club ☐ Blanche

Credit Card No. _____

Master Charge # _____ Exp. Date _____

Name _____

Address _____

City _____

State _____ Zip _____

Signature _____

CB3 © Camelot '79

801 Green Bay Rd., Lake Bluff, IL 60044

Camelot DIRECT

A DIVISION OF UNITED EDUCATORS, INC.



Pulsonic Baseball II from Mego

One of the favorites of our panel of kids, this one- or two-player game is stylized in molded plastic like a miniature baseball stadium. One player pitches to the other by pressing one of four pitch buttons at the top of the unit. With a fast ball, he may press a "change-up" button to convert the pitch from fast to slow. The other player presses the "batter" button just as the LED ball enters the strike zone. If the batter connects, the LED ball bounces around the field and finally comes to rest as a catch by one of the fielders, a foul ball, or a hit. When the batter has runners on first and third, he may try to steal, but timing is critical to execute this play without being thrown out. The game keeps track of strikes, balls, outs, and the score. A cute little tune is played after each play or when teams change sides. With just one player, the game takes the role of the fielders and lets the player always be the team at bat.



Baseball by Mattel

There is no question that baseball is the all-American electronics sport this year (eleven manufacturers). Of the many, Mattel's is one of the best. In this electronic game, when you are

up to bat you press the "pitch" key and 1.5 to 2.5 seconds later a moving LED "ball" comes from the pitcher's mound toward the batter. When it reaches the strike zone you press the "hit" key and hope for a good hit. You can either fly out, hit to some point in the field or hit a home run. If you hit to the field, the beeper in the game will indicate how many bases you can try to run — but watch out, because sometimes the fielder will be faster than your runners and will throw you out. You've got to be fast on the keys. If you hold down the run key just a bit too long you overshoot a base and are almost always thrown out. At the end of each half inning you press the "score" key to see the score—visitors vs. home team. This is the time to pass the game to your opponent or, if you are playing both sides, to start playing the opposite team. Mattel, recognizing that nine innings is a long time to hold one's interest has made this into a five inning game. At the end of the five innings the final score lights up and the game becomes inactive until you switch to the off position and back to one of the two skill levels. Uses one 9-volt battery.



MVP Baseball, Football, and Basket-Basketball

Of the three games, baseball was by far the best. In it, the fielder "pitches" the ball to the player who is at bat. Upon pressing the "pitch" button a slot machine type mechanism spins. The batter then presses



either the "bat" or "take" button. The wheels stop spinning and the game reveals the effect that the batter had on the ball. That is, a ball, strike or hit. If the batter hit the ball, the fielder then presses the "field" button and tries to make an out. We found that 19 times out of 20 he was successful. On the other time an error was committed. The batter, if he has a player on one of the bases, may also elect a steal. Stealing is successful about 50% of the time. A record of strikes, balls and outs may be kept on little plastic dials on the side of the game. A record of runs must be kept with pencil and paper on the score card provided with the game. All in all, not a bad game for the money.

We found Football considerably more complex to play. The general playing mechanism was the same with the little windows showing the results of each play. But you have to keep track of which results applied to a running play and which applied to a passing play. Your own imagination is probably the greatest asset in making football an interesting and fun game.

Basketball is entirely different. Each player has five buttons to press



Do TRS-80's new lower prices mean you get "cheaper" computers?

No Way!



Here's why . . .

Production costs drop and manufacturing efficiency rises when you deliver more than 100,000 TRS-80TM Model I systems built in your own factories in less than two years. No other computer — ever — has had customer acceptance on such a scale.

Sure, TRS-80 Model I is the price leader, but then you know better than to make your decision based on price alone. You've got to be convinced you get 1) full quality and features, and that 2) our more than 100 service locations furnish faster service, and that 3) we continue to add new software and hardware for TRS-80, even though our list is already one of the industry's longest.

Level I — 4K
Ideal Starter
System

\$499

Was \$599 last year

Level II — 16K
Advanced System
with Calculator Keypad

\$849

Was \$988 last year

New Model I/II Catalog

Come in and get your copy of our new 24-page computer catalog and you'll decide that TRS-80 is your unique opportunity to own a full-featured, fully serviced, fully supported microcomputer at a really nice price.



New TRS-80 Model II

A bigger, more powerful "brother" to the TRS-80. Completely new, it's a business microcomputer with capabilities beginning where Model I approaches upper limits. Storage capacity up to 2 megabytes. Order now for early delivery.

\$3450

1/2-Megabyte
Basic System



These two cards honored
at most Radio Shack stores

Radio Shack[®]

The biggest name in little computersTM

A Division of Tandy Corporation • Fort Worth, Texas 76102
Over 7000 Locations in 40 Countries

Retail prices may vary at individual stores and dealers.

to propel a little plastic ball up toward a basket. If it goes through the basket it strikes an arm that registers two points on the score board and makes a squeak reminiscent of the baby dolls of 20 years ago. The first player to score 30 points wins. Basketball and pinball are probably best suited to children 5 to 8, baseball up to 10 years of age and football up to 13 or 14.



Intercept by Lakeside

Intercept is described as "an electronic search and destroy game with the sounds and lights of fighter attack." Indeed it does have sound and light — mostly sound. Two players are pitted against each other on a 10 by 20 grid. One player tries to move his attack jet from one end of the grid to the air field target at the other end. The other player is armed with four SAM missile bases, which can be placed at various strategic locations on the grid, and an interceptor to locate the attack jet. The player on the attack moves his attack jet four spaces horizontally or vertically with each move, and the interceptor must try to pinpoint his location. The main use of electronics in this game is to light up the location of the attack jet or the interceptor after each move, and to make a siren-like noise when the interceptor locates the attack jet. In addition there is a constant clock ticking as the game goes on. This is hardly what one would call an "intelligent" electronic game. However, youngsters will probably enjoy it as they do many of the other combination action/strategic games on the market today. (Hint: One particularly aggressive player found that the SAM missiles can be positioned to always allow a win on the first move.)

Hit and Missile from Tomy

Not an electronic game per se, Hit and Missile is a battery action game of "pursuit and shoot." Randomly spaced aircraft pass across the top of the screen in two directions. You move your missile launcher back and forth across the bottom of the screen and press the "fire button" to launch a missile. A hit produces a flashing light and "explosion" sound effect. Your score is recorded on a readout in the lower left corner of the game. Each game lasts one minute. Ruggedly designed, this game seems to hold the attention of 6 to 10 year olds.



Digital Diamond from Tomy

This is a two-player baseball game. One player presses a button to "pitch" the ball. The other player tries to bat it with his button. If he connects, a slot-machine type dial spins to show the outcome (out, single, double, etc.). Keeping track of strikes, balls, outs, score, and runners on the field is all done manually with little plastic dials and levers. If it sounds like a bit of a bore, it is. On the other hand, it's cheaper than the electronic games and it's well constructed.

Blockade and Score Four by Lakeside

Blockade is a non-electronic strategy game for two people. Players move their two "pawns" across a grid in an attempt to capture the opponent's "home" square. After each move, the player places a barrier on the grid creating a network of walls to block the other player's advance — but there must always be at least one open pathway, no matter how convoluted. The first one to make it through the maze wins.



Score Four is a "four in a row" strategy game in three dimensions." The playing area consists of 16 plastic spindles set vertically in a plastic tray. Players attempt to score by placing four beads in a row horizontally, vertically or diagonally. The first one is easy, but that's only one quarter of the game: the winner is the player who scores four times. Planning your strategy while keeping track of your opponent's beads in three dimensions can be quite tricky. We saw one game in which the winner was not determined until the last of the 64 beads was placed. Although less novel than some of the electronic games we tested, Blockade and Score Four are intriguing games of strategy and will probably have more lasting appeal than many.



Bringing Music Home



Being a spectator is great
...but why not participate?

- Sing along
- Compose
- Play
- Learn from Specialists

LET MICRO MUSIC TURN YOUR APPLE II® INTO A FAMILY MUSIC CENTER!

VISIT THE APPLE DEALER NEAREST YOU AND ASK FOR A DEMONSTRATION OF MMI'S MICRO COMPOSER™

The MICRO COMPOSER LETS YOU—

- Play up to 4 simultaneous voices
- See all 4 voices at the same time you're hearing the music—a must for music editing!
- Enter music notes by a fast, simple and well-tested coding system.
- Program the pitch, rhythm, and timbre of the music. Tempo is varied by the Apple paddle.
- Choose 7 different tone colors for each voice or create your own tone color.
- Compose, edit, display, and play music through an interactive, command-driven language that's easy to learn.
- Save your music on disk or cassette.
- Hear quality music sound at low cost through the MICRO MUSIC™ DAC card. No amplifier needed! Designed for MMI by Hal Chamberlin and Micro Technology Unlimited.
- Select from future MMI music instruction software to accompany the MICRO MUSIC DAC.

Ask your local dealer for information on MMI products, or contact:



Micro Music Inc 309 W. Beaufort, Normal, Illinois 61761 (309) 452-6991

The MICRO COMPOSER is an APPLE II® compatible, low-cost music system designed by the folks at MMI. Our music software was designed by leading experts in music education. A simple step-by-step instruction manual leads you through entering, displaying, editing, and playing music with up to four voices—soprano, alto, tenor, and bass. You can change the sound of each voice to reed, brass, string, or organ sounds and you can even color your own music sounds!



HAVE FUN! THE MICRO COMPOSER comes complete with an instruction manual, software disk or cassette—in either Integer or Applesoft ROM BASIC, and the MICRO MUSIC DAC music card. Just plug the MICRO MUSIC DAC into the APPLE extension slot and connect the audio cable to a speaker.

Suggested retail price \$220.

APPLE II is a trademark of Apple Computer Inc.

Single Board Computers: Shopping Considerations

Rick Grossman



In recent years there have been a number of single board computers and evaluation kits made available to the microcomputing community. The purpose of this article is to help the educator, hobbyist and engineer decide which of these boards best suits a particular application.



The Hobbyist's Requirements

Many hobbyists have started with single board computers because they serve as excellent "teaching machines" for learning about the operation of the hardware and how to program. Documentation, ease of use and the availability of high-level languages are three important considerations for the person with this objective in mind.

Rick Grossman, Instructor, Federal Correctional Institution, Lompoc, CA 93436.

The hobbyist who realizes that an Apple, North Star Horizon, or TRS-80 isn't intended as a 24-hour multi-tasking system will be looking to single board computers for such exotic tasks as turning the sprinklers on and off and controlling lights and appliances around the home. Needless to say, getting into this type of dedicated controller application requires a little more than a fundamental background in hardware and interfacing.

Expansion to a larger system is an objective with some hobbyists and is accomplished easily with some boards and requires considerable effort with others. The ease with which a video display, external keyboard and printer can be added are especially important for the individual with little or no hardware background (although going through the frustrations and hopefully, successful interfacing of those devices can be quite an education).

Starting with a single board computer is an economical approach for expanding to a larger system. The expansion can be done in a step-by-step manner. Several boards are S-100 based or use the S-100 bus for expansion. As a result, the many S-100 boards on the market are available for expanding the system. Practically all units have expansion memory and I/O boards available from the manufacturer and, with the more popular boards, from second sources as well.

Assemblers and high-level languages, such as BASIC and FORTH, are available for several boards for those interested in learning program-

ming. A cassette interface is important for saving user-generated programs, but the recording format is equally important if buying commercially available software is in the scheme of things. Although there isn't a whole lot available for single board computers, some can be obtained through user groups.



Engineer/Technician Requirements

The engineer or technician will be primarily interested in the evaluation or actual use of a single board computer. The unit will often be used as a dedicated controller to replace or improve an existing hardware system or as the core of an entirely new design application.

Shopping, con't...

Software considerations aren't usually as important as hardware capability because the software development, especially in the case of mass-produced units, is done on development systems. These are disk-based mini or micro systems running cross-assemblers for the board being developed. Upon completion the software is burned into PROMs, installed on the board, and then becomes the "operating system" for controlling the particular process for which the board was designed. However, for "one & two production runs, or for evaluation, the engineer/technician will often want a board with an assembler, keypad and LED display.

Some of the features an engineer looks for in a single board computer are: the number and type of I/O ports available, the amount of PROM space, interrupt capability and buffered I/O lines to allow easy interfacing to prototype circuits.

Educator Requirements

Single board computers are used primarily in schools for teaching students hardware and programming fundamentals and dedicated controller applications. They are not generally used for teaching computer



programming which is more suitable to personal computing systems, such as the TRS-80, Apple and others. The instructor will be using the computer as an instructional aid to supplement and complement classroom lectures. The board must be able to provide the student with "hands on" experience in learning how to control external devices. Good documentation is particularly important so the instructor doesn't have to develop a lot of material on fundamentals and operation and can concentrate on the course material dealing with applications.

Some important considerations for a single board computer to be used in a teaching environment are: easy maintenance, with all components and test points accessible; keyboard and display; TTY interface and assembler for program development; buffered I/O; good documentation, preferably with an educational slant.

Making The Decision

The selection chart contains most of the important considerations when shopping for a single board computer. However, the chart should only be the first step in the decision process. The second step should be to contact the manufacturer for more detailed information and, hopefully, a copy of the documentation.

A few capabilities not listed in the chart which might be needed for certain applications include: DMA, interrupts, on-board timers, baud rates, type of cassette interface, documentation rating and on-board breadboarding area.

The type of microprocessor, I/O, price, programming and expansion capability are of interest to anyone buying a single board computer and the chart should help in meeting that end. □

NOW — GET EVERYTHING YOU NEED (hardware and software) TO ADD SOUND TO YOUR BASIC PROGRAMS!

Computer games without sound effects are like TV shows without audio — flat. Now you can add the joy of sound to your entire BASIC library. Soundware™ gives you everything you need!

You get hardware — a neat speaker-amplifier unit with volume control, earphone jack and connectors. No wiring, no soldering — simply add two AA batteries and plug it in!

You get software — two programs to demonstrate and help you create your own sound effects. Make your programs come alive — add laser sounds, bird calls, bounces, clicks, sirens, music notes, tunes! Complete instructions included, one-year limited warranty, immediate shipment.

GREAT CHRISTMAS GIFT!

See your dealer for demonstrations.

If not convenient, order direct by phone (408) 371-4120, or coupon.

Please send SOUNDWARE as follows:

- | | | |
|---|--|--|
| ☐ All PETS | ☐ All TRS-80 Level II — \$29.95 | ☐ All COMPUCOLOR II — \$39.95 |
| ☐ Payment enclosed (CAP pays shipping) | ☐ Send C.O.D. (add 15%) | ☐ Master Charge |
| ☐ VISA/Discover/Amex | | |

Card No. _____ Exp. Date _____ Sig. _____ (California add 6% sales tax)

Please print Name _____

Address _____

City _____ State _____ Zip _____

☐ Send me a FREE catalog of game programs for APPLE, PET and COMPUCOLOR.

PET

TRS-80 II

COMPUCOLOR II

PET

MPUCOLOR II

1884 Shulman Ave. San Jose, CA 95124 (408) 371-4120

CAP Electronics, Dept. C

CIRCLE 116 ON READER SERVICE CARD

NAME	ADDRESS	BIT	PROCESSOR	RAM	ROM	KEYBOARD	DISPLAY
KIM-1	Commodore/MOS 901 California Ave. Palo Alto, CA 94304	8	6502	1K	2K	24 Key Hex	6 Digit LED
SUPERBOARD II	Ohio Scientific 1333 S. Chillicothe Rd. Aurora, OH 44202	8	6502	4K	8K	53 Key Typewriter	Video
SYM-1	Synertek Systems 150-160 S. Wolfe Rd. Sunnyvale, CA 94086	8	6502	1K	4K	28 Key	6 Digit LED
AIM 65	Rockwell International P.O. Box 3669 Anaheim, CA 92803	8	6502	1K (a) 4K (b)	8K	54 Key Typewriter	20 character Alpha/ numeric LED
1802 Evaluation Kit	Local RCA Solid State Sales office	8	1802	256 bytes	512 bytes	Remote Calculator Keypad & display	6 Digit Hex LED
Cosmac VIP	RCA - Cosmac VIP New Holland Ave. Lancaster, PA 17604	8	1802	2K	4K	16 Key	Video on Board
ELF II	Netronics R&D Ltd. 333 Litchfield Rd. New Milford, CT 06776	8	1802	256 bytes		24 Key	2 Digit LED
Super Elf	Quest Electronics P.O. Box 44305 Santa Clara, CA 95054	8	1802	256 bytes	32K bytes	24 Key Hex	6 Digit LED & Video
Micro 68	Electronic Products 1157 Vega San Diego, CA 92110	8	6800	128	512	16 Key	6 Digit LED
Educator II	Motorola HEP/MRO 705 West 22nd St. Tempe, AZ 85282	8	6800	128	512	8 Toggle switches	LED Lamps
Wince	Wintek Corp. 902 N. 9th St. Lafayette, IN 47904	8	6800	128	512 (EPROM)	None	None
ET 3400	Heath Company Benton Harbor Michigan 49022	8	6800	256	1K	17 Key	6 Digit LED
MD-6906	MicroDaSys P.O. Box 3605, Los Angeles, CA 90036	16	6809	1K	Mon Bug II	None	None
PAIA 8700	PAIA Electronics P.O. Box 14359 Oklahoma City, OK 73114	8	6503	512	256	24 Key	2 Digit LED
SDK 86	Intel Corp. 3065 Bowers Santa Clara, CA 95051	16	8086	2K	8K	24 Key	8 Digit LED
Intercept Jr. Tutorial	Intersil Inc. 10900 N. Tantau Cupertino, CA 95014	12	6100	256	1K	12 Key	8 Digit LED
TM 990/189	Texas Instruments P.O. Box 1443m/s 6404 Houston, TX 7700	16	9900	1K	4K	45 Key	10 Digit LED
Adaptable Board Computer	Signetics 811 E. Argues Ave. Sunnyvale, CA 94086	8	2650	512	1K		
Nibbler	DigiKey P.O. Box 667 Thief River Falls, MN 56701	8	SCMP/II	2K	4K		
Z80 Starter Kit	SD Systems P.O. Box 28810 Dallas, TX 75228	8	Z80	1K	2K	28 Key	6 Digit LED
MIKE 8 Model 882	Martin Research 3336 Commercial Ave. Northbrook, IL 60062	8	Z80	4K	1K	20 Key	6 Digit LED
Basic Controller	Dyna Byte 4020 Fabian Palo Alto, CA 94303	8	Z80	4K	4K (EPROM)	Keyboard input port on Board	One 8 bit light port
Model SSC	Cromemco Inc. 280 Bernardo Ave. Mountain View, CA 94040	8	Z80	1K	8K	None	None
Explorer 85	Netronics R&D, Ltd. 333 Litchfield Rd. New Milford, CT 06776	8	8085	256	2K	None	None
TK 80A	Nec Micro Computers 173 Worcester St. Wellesley, MA 02181	8	8080A	1K	1K (PROM)	25 Key	8 Digit
SDK 85	Intel Corp. 3065 Bowers Ave. Santa Clara, CA 95051	8	8085	256	2K	24 Key	6 Digit LED

I/O	CASSETTE	HIGHER LEVEL LANGUAGE	POWER REQUIRED	PRICE	EXPANSION CAPABILITY	NOTES
2 Parallel Ports 120 mA	Yes	Tiny BASIC Microsoft BASIC FORTH available	+5 V +12 V	\$170	S100 Buss	
RS232	Yes	BASIC ROM on Board	5V -15V	\$279	8K on Board	
4 Parallel Ports RS232 20 mA	Yes	BASIC ROM available	+5 V	\$239	4K RAM; I/O 4K RAM on Board; 2 Parallel; 6K EPROM	
2 Parallel TTY	Yes	BASIC Assembler ROM available	+5 V +24 V	\$375 (a) \$450 (b)	4K RAM, 12K ROM on Board	20 character/line Printer on Board Enclosure available
2 Parallel RS232 or 20 mA Current Loop	No	Tiny BASIC listing in manual (2K)	Includes Power Supply	\$325	4K RAM, to 1.5K ROM	Fixed point binary arithmetic ROM available
1 Parallel Port	Yes	Interpreter	+5 V	\$249	32K RAM several modules available	
		Tiny BASIC	+5 V	\$99.95 Kit		
		Tiny BASIC	+5 V	\$106.95 Kit	Cassette, 4K Mem. & TTY/RS232 Expansion Board \$89.95	Music Speaker included
2 Parallel Serial (1)	(1)		+5 V -10 V			Serial port (1) Cassette interface (1)
2 Parallel	Yes		+5 V	\$169.95	256 Byte RAM on Board	
2 Parallel TTL	No	Tiny BASIC Available	+5 V +12 V -12 V	\$298		64K Socketed
None	No		+5 +12 -12	\$189.95 (Kit) \$240.00	512 Byte RAM on Board	Power Supply on Board
					4K RAM, 20 mA, 1 cassette interface Monitor & Tiny BASIC	
20 I/O Lines RS232	Yes		+8 V +16 V	\$239 (Kit) \$299	10K PROM on Board	Real time Clock S100 Compatible
1 Parallel output 2 Parallel input	Yes (6)			\$149.95 (Kit)	1K RAM, 1K ROM on Board 4K RAM	
3 Parallel 1 RS232	No		+5 +12	\$780 (Kit) \$550 Educ Institution	4K RAM on Board	
	No	MicroInterpreter PROM on Board	+5 V or +10 V	\$281	3K RAM, 1K ROM Parallel I/O Board & Serial I/O Board	
1 Parallel	Yes		+5 V +12 V -12 V	\$299	2K RAM, 2K EPROM on Board EIA and TTY interface	
2 Parallel 1 RS232 or 20 mA	No		+5 V +12 V	\$275 \$190 (Kit)	24K	Socket PROM & CPU
110 Baud	No	BASIC (2)	+5V	\$149.95	28 K (44 pin)	Socketed
2 Parallel Port	Yes		+5V +25 V (PROM Programming)	\$249 (Kit) \$399	S100 Buss 2K RAM on Board	Prom Programmer on Board
None			+5V	\$895	1 Serial port 1 Parallel port	Parallel port available Prom Programmer on Board
1 Parallel Input 1 Parallel output 1 RS232 or 20 mA	Yes	PROM on Board Industrial BASIC	+8 V +16 V -16 V	\$750	16K RAM on Board	8 Relays on board Video interface on Board
3 Parallel 1-RS232 on 20 mA		BASIC PROM available		\$395 (Kit) \$450	S100 Buss	
2 Parallel Ports 7.5 bit port	Yes	Extended BASIC	-8 +8	\$129.95	S100 Buss 4K RAM, 8K ROM on Board	Keyboard/Video available
3 Parallel Ports	Yes	No	+5 +12	\$299	4K RAM, 8K PROM on Board	
4 Parallel Ports 120 mA port	No		+5V -100 (TTY)	\$300 Kit \$210 Educ institutions	512 Byte RAM, 4K ROM on Board	System Design Kit

creative computing

Vol. 2, No. 5—Sep/Oct 1976

Computer programming contests, Russian computing, Do-it-yourself computer poetry (3 articles), two games: Watchman and Delmar, four feature reviews of "Computer Power and Human Reason," Computers in elections, two great stories.

Vol. 3, No. 1—Jan/Feb 1977

Equipment profiles: Teletype model 43, IMSAI 8080, SWTPC 6800, Computers in the movies, All about Electronic Funds Transfer, Centerfold "Computer Tree" Babbage to 370/158, A approach for analyzing discontinuous events, unsolvable complex problems, the Woolly Mammoth problem, ten outstanding problems for computer solution, Games: Drag Masterbags, Strike 9.

Vol. 3, No. 4 - Jul/Aug 1977

Guide to selecting a microcomputer, Write your own CAL, Part 2, Computers in medicine and health care, Dwyer: "8-Hour Course in Basic-Part 1," Thinking Strategies-Part 3," Sherlock Holmes and Charles Babbage. Four new games.

Vol. 3, No. 5—Sep/Oct 1977

A dynamic debugging system for 8080 assembly language, bibliography of "limits to growth" models, Dwyer: 8-hour course in Basic-Part 2, Programming approaches to solving complex equations, Electronic information exchange, Symmetric art with your computer, in-depth reviews of 5 microcomputer BASICs, software technology music system, Games: Nomad, Rotate, Lissajous.

Vol. 3, No. 6—Nov/Dec 1977

Programming techniques- Part 1, CAI, Topics in Logic, Three 8080 8K BASIC evaluations, Smart electronic game reviews, How computers can write final exams, Mastermind II and Othello computer games, Profile of the Alpha 1 and Alpha 2 for the TDL Xitan.

Vol. 4, No. 1—Jan/Feb 1978

File structures, 16-bit computers, LOGO Language, Murphy's laws, review of Radio Shack TRS-80 and Heath H8, World model, biorhythms, how to write a simulation, Hart sort algorithm, 3 games, 8-Hour Basic Course - Part 4.

Vol. 4, No. 2—Mar/Apr 1978

Parody of *Dalarnation*, Business Computing: 5 inventory control systems, ABCs of microcomputers, structured software, 16-bit pros, four computer music systems, reviews of 2 Basic interpreters and micro-APL, CAI-Part 4, puzzles and games.

Vol. 4, No. 3—May/June 1978

Art and animation section: 8 articles, color graphics, SAM76, research, a real budget, 8080, business computing, word systems, Oregon Trail, Black Box, reviews of VideoBrain, MSI floppy, OSI Challenger, AI speech synthesizer.

Vol. 4, No. 4—Jul/Aug 1978

Reviews of Commodore PET, Apple II, Atari computer, Video games, interfacing to the real world: 5 articles, business computing: 4 word processing systems, ROM section: 7 articles, backgammon game, bar code.

Vol. 4, No. 5—Sep/Oct 1978

Equipment profiles: TRS-80, Exidy sorcerer, Bally Arcade, PolyMorphic 8813, Merlin Video Display preview of nine new personal computers, Accounts receivable systems, All about PASCAL, real world games, a real time clock to build, PET cassettes, special education features, new software: Star Wars, Hex.

Vol. 4, No. 6—Nov/Dec 1978

Subject index and file index in BASIC, consumer computers buying guide, electronic game reviews, critical path analysis, mailing label programs, robot programming, experiment in teaching strategic thinking, evaluations of Northstar Horizon, CP/M operating system and backgammon computers, columns on Apple II PET and TRS-80, plus game section including "Corral", "Joust" and "Puzzle".

Vol. 5, No. 1—January 1979

Computers in fiction: Survey of Educator's Attitudes; K-State; How to Hide Your Basic Program; World Chess Championship Computer; Compleat Computer Catalog; Microchess for the TRS-80; Exidy Sorcerer; Ohio Scientific superboard II; Robots in Fiction; Help for the Weary Taxpayer; A counterfeit Cursor for your PET; Medical Audit Time.

Vol. 5, No. 2—February 1979

Evaluations: Electric Pencil, Heathkit H-8, Computer Music Records, Computer Games: Gold Mine, Atom-20, Computerized Sports Predictions, Multiple Regression Analysis Simplified, Value of Computers in Education, Budget Management System, Help for the beleaguered consumer.

Vol. 5, No. 3—March 1979

Six articles on data base management; Evaluations of TRS-80 and Apple Disk Systems; Payroll system; the Game of Go; Small business computing with the Sourcerer; Judging of sports events; Social Science survey program.

Vol. 5, No. 4—April 1979

Safeguarding your computer; Interpretive programming; Elements of a good computer game, Music composition; "What will happen if"; Vertical graphs and bar charts; People Programming; Home applications.

Vol. 5, No. 5—May 1979

Word processing systems — buying a system and 5 evaluations; Writing 2 user-oriented programs; Tutorial on PILOT; 3 new games; Amortization schedules, reading and comprehension tests.

Vol. 5, No. 6—June 1979

8 Articles on computer graphics and plotting; Evaluations: HiPlot, NAD System, ALF/Apple Music Synthesizer; Copyright of Software; Sesame Place; Probability Study; String Manipulations; 3 New Games.

Vol. 5, No. 7—July 1979

Two Ecology Simulations, Creativity Test; World Power Systems; Files and Data Basis — 4 Articles; Evaluations of Six Peripherals and Software Systems; Personal finance Model, 2 logic games.

BACK

creative computing

the magazine of recreational and educational computing



ISSUES

PROJECT PROMETHEUS
HOW DOES YOUR CRYSTAL
MAKE ME MORE MUSIC, MAESTRO

ROM
COMPUTER APPLICATIONS FOR



Are you missing any back issues of **Creative Computing** or **ROM** magazine? The applications, programming techniques, simulations, problems, commentary, articles and fiction are practically timeless. Not only that, but the earlier issues are actually increasing in value.

Prices are \$2.00 each, three for \$5.00, or ten for \$15.00. Postage \$1.00 for up to 3 issues, \$2.00 for 4 or more.

SUPER SPECIAL: One of everything we have plus 4 back issues of **Computer Notes** — 32 magazines in all — for only \$40 postpaid!

ROM

July 1977

SOL: The Inside Story; Braille and the Computer Video newspaper; A Chip is Born; The Care and Feeding of Your Home Computer; Digital Foam — the peripheral of the future.

August 1977

The Kit and I, Part I, by someone who's never soldered before; Introduction to the fundamentals of Computer Memory; Tips for the do-it-yourself hardware beginner; Binary clocks; APLomania.

September 1977

Xeroxes and other hard copy off your CRT; Payroll Program; How Computers Work; The Kit and I, Part II: or Power to the Computer; CCD's How They Work and How They're Made; A look at PLATO, an Educational Computer System; IBM 5100.

October 1977

Binary Arithmetic For the Beginner; Microprocessor Aid for the Deaf and Blind; The Kilobyte Card; Scott Joplin on Your Sci-Fi Hi-Fi; Building a Basic Music Board; Flowcharting; Payroll Program.

November 1977

Solar Energy Measurement; A Beginners Introduction to BASIC; The Kit and I, Part III; More Music to Play on Your Computer; Micro Maintenance; Solomon and Viet; Putting Together a Personal Computing System; Time Sharing on the Family MICRO.

December 1977

A Beginners Guide to Peripherals; The Best Slot Machine Game ever; Artificial Intelligence?; An Electronic Jungle Gym for Kids; File Copy Program; Better Health Through Electronics; the Kit and I Part IV.

January 1978

Synthetic Skin for Your Robot and How to Make It; TLC: A Visual Programming Language; The Code That Can't Be Cracked; Beginners Guide to Computer Graphics; The Computer and Natural Language; First-Timer's Guide to Circuit Board Etching.

February 1978

A Practical Mailing List Program; Artificial Intelligence; Assemblers; Flowgrams—A New Programming Tool; Refresher Course in BASIC; Micros and Analyzing Election Results; Upgrading Your BASIC.

March-April 1978

Introduction to real time concepts; Felsenstein: An Absolute-Time Clock; Dreyfus: Things Computers Still Can't Do; Introduction to Interpreters; Othello Games; Weizenbaum: Incomprehensible Programs; The Quasar Robot Revealed; Chesson: Cryptanalysis.

Send order to Creative Computing, P.O. Box 789-M, Morristown, NJ 07960. Or save time and call your credit card order toll free to: **800-631-8112** (in NJ, 201-540-0445).

Please rush me the following back issues:

Magazine and issue

_____	_____
_____	_____
_____	_____
_____	_____

Amount for mags: _____ + Postage _____ = Total _____

☐ Payment enclosed ☐ Visa/Bank Americard ☐ MasterCard ☐ American Express

Card No. _____ Expiration date _____ Signature _____

Name _____

Address _____

City _____ State _____ Zip _____

Personal Computer Comparison Chart

Steve North



Although the accompanying comparison is self-explanatory, a few additional remarks are appropriate. To begin, the descriptions of the Atari and TI computers are somewhat sketchy since we only had manufacturer's literature from which to work. At the time of this writing (late August) neither company had actually delivered production models.

The comparison is also a bit subjective in a few categories, such as hardware quality and portability, but these ratings were arrived at after serious consideration. The availability of software from second sources is also not included but this is generally an important consideration unless you plan to write every program you want to use.

Finally, be aware that each computer is best for certain applications and it's impossible to select a computer that's the "absolute best" for everyone. The TRS-80 is one of the least expensive computers, has an excellent BASIC, and might be thought of as "every man's BASIC-speaking computer;" however, it seems less attractive when expanded beyond the basic 16K cassette-based system. The Apple is more expensive to begin with but is more sophisticated and is more competitive when more memory and disks are added. The PET made quite a splash when it was introduced and is still a good value but has a number of drawbacks. The Compucolor is an excellent color graphics machine and has found its own niche. The newer Atari and TI computers, with ROM cartridges and mass marketing, seem to be the wave of the future.

Computer	Radio Shack TRS-80 Level II	Apple II
Case	grey and black plastic	beige plastic
Keyboard	typewriter, 2-key rollover, upper-lower case, number pad	typewriter, n-key rollover upper case only
Memory	12K ROM (BASIC) 16K RAM (32-48K with expansion interface)	12K ROM (BASIC, monitor) 16-48K RAM
Language	Level II BASIC: 14 commands, 33 statements, 36 functions, 23 error messages	Integer BASIC: 20 commands, 30 statements, 8 functions, 15 error messages Applesoft BASIC: 12 commands, 48 state- ments, 27 functions, 19 error messages
Resident Machine Language Monitor	no	yes
Graphics	48 x 128 pixels B & W	40 x 40, 16 colors 280 x 160, 6 colors
Text	16 lines x 64 characters wide upper case only	24 x 40, upper case only video reverse and blink
Expansion	expansion interface, 1-4 disk drives, modem, voice synthesizer, printers	8 general-purpose I/O slots for disks, printers, speech boards, clocks, etc.
Realtime or Hardware Clock	In expansion interface	optional plug-in board
I/O Ports built-in	none	game paddles
Built-in Audio	no	1 voice
Audio Cassette	500 baud, motor control	1200 baud
Disk Capacity	drive 1 - 56K drive 2, 3, 4 - 82K	108K, 4 drives
Video Display	B & W TV monitor included	requires color TV
Factory Support and Repair	excellent	good
Portability	fair	good
Hardware Quality	fair	excellent
Price (16K RAM)	\$849	\$1195



Commodore PET	Compucolor II	Atari 800	TI 99/4
beige metal case	simulated wood grain and beige plastic	beige plastic	grey and black plastic
typewriter, n-key rollover, upper-lower case	typewriter, upper case and graphics	typewriter, upper-lower case	typewriter layout with space between keys
14K ROM (BASIC and OS) 8-32K RAM	16K ROM (BASIC, DOS, CRT mode) 8-32K RAM	8K ROM internal 8-32K cartridge 8-48K RAM	26K ROM internal 30K ROM cartridge 16K RAM
Commodore BASIC: 7 commands, 26 statements, 17 functions, 23 error messages	Disk BASIC 8001: 3 commands, 29 statements, 27 functions	Atari BASIC	TI BASIC: ANSI BASIC with sound and graphics 14 commands, 33 statements, 19 functions
no	no	no	no
64 graphics characters B & W	128 x 128, 8 colors 64 graphics characters	380 x 192, 16 colors	192 x 256, 16 colors
25 x 40, upper/lower or upper/graphics video reverse	32 x 64, in color	24 x 40, upper-lower case	24 x 32
IEEE-488 Bus, printer	2nd disk drive expanded keyboards	printer, disks, modem	speech synthesizer, modem, printer, cassette recorder, disk drives
yes	yes	interval timer	interval timer
parallel port	RS-232	game paddles, light pen	general-purpose I/O port, RS-232 option
no	no	4 voices	3 voices, noise generator
500 baud (?)	no (floppy disk built-in)	600 baud	optional, 1300 baud
?	51K, 2 drives	80K, 4 drives	80K, 4 drives
built-in B&W monitor	color TV monitor included	requires color TV	color TV monitor included
fair	good	?	?
good	fair	good	fair
fair to good	good	?	?
\$795	\$1695	\$1000	\$1150



Radio Shack's Low-Cost Quick Printer II

George Blank

One year ago I was convinced that if I wanted to work hard enough, I could pick up an old beat-up Teletype and interface it to my computer so I could have hard copy for only \$400 or \$500. I wouldn't expect much, but it would at least help my programming by providing line listings. If I was offered a brand new printer, complete with interface, for \$220, I would have danced for joy. At it was, until I was asked to edit *SoftSide* magazine this spring, I couldn't afford any kind of printer.

However, Radio Shack is now offering a printer so cheap, I could afford to buy it as a backup. And what a printer! The Quick Printer II includes a built in microprocessor to operate it, comes with three built in interfaces, prints in upper and lower case and sells for \$219.

Features

The Quick Printer II is small; 6½ inches wide, 9½ inches deep, and 3¼ inches high. It prints on special electrolytic paper just under 2½ inches wide, about the same size as a cash register tape. There are three built in interfaces, for direct connection to the TRS-80 bus, for a Centronics parallel printer port and for RS-232 serial connection. It comes with a 22 inch ribbon cable to connect it to the bus on the back of a TRS-80. The cable to connect it to the line printer port is an additional \$19.95. As it comes, it will not work with the expansion interface, for the TRS-Bus on the expansion interface does not carry the LPRINT and LLIST functions. You would either have to buy the line printer cable, or use the RS-232 board and the port on the front of the expansion interface, building your own connecting cable according to instructions in the Quick Printer II manual. It should not be hard to connect to any RS-232 port on any computer, as serial operation is simple and requires only 3 wires connected to a 5 connector DIN jack.

George Blank, Pastor, Calvary United Presbyterian Church, 266 Second St., Leechburg, PA 15656.

For serial operation, it is only required that the computer monitor the handshake strobe, and when the printer signals a ready, send one bit of data. The three lines are CLEAR TO SEND, DATA and GROUND. The printer will accept 7 bit ASCII data, even or odd parity, with one or two stop bits, 7 bit ASCII data, no parity, with two stop bits, or 8 bit ASCII data, no parity, one or two stop bits. No testing is done by the printer for parity errors.



The author's 32K TRS-80 system with a single disk, 16K Level II, Microcomputer devices printer and Quick Printer II.

The character set is a modified ASCII subset, printing codes 33 (exclamation point) through 127 (DELETE, printed as a solid block), substituting arrows for codes 91 to 94, as found in the Radio Shack User's Manuals. The lower case characters g, j, p, q and y do not descend below the line, but are printed in raised position. The printer ignores bit 7, and prints the graphics characters as a duplicate set of the other characters. Of the 32 ASCII control codes, the printer ignores all but two; the carriage return (code 13) and SHIFT IN (code 15). If shift in is the first character on a line, it switches the printer from the 32 character per line mode to 16 characters per line for that one line only. The printer is a line printer, storing the characters in a buffer, and not printing until it receives 32 characters or a carriage return. The character spacing is 6 lines per inch vertical and either 18 or 9 characters per inch horizontal, software selectable. The format is a 5 x 7 dot matrix.

The Quick Printer II is very quiet, making no sound at all when it is not printing, and only the sound of the paper feed when printing. For that reason alone I prefer it to my Selectra Print when making a long listing and, in addition, it is four times as fast, printing at 64 characters per second.

Since the printer is almost all electronic, the paper feed and the print head being the only moving parts, maintenance should be minimal. Recommended maintenance is simply to avoid physical shocks to the printer, keep it dry, and if print quality deteriorates, clean the print head with a fine brush. The print head has a stated life of 30 million characters. (Let's see—at 64 characters per second, that means I could wear it out in 5 days, 10 hours, 12 minutes and 6/10 of a second, if I found a roll of paper long enough!)

In keeping with Radio Shack's typical profit margins of 65%, the unit is all plastic except for the electrical parts. The paper sits in a well on top of the printer on a plastic rod, and a pencil stub would probably do just as well for a roller if you ever break or lose the original. A red LED tells when the unit is on, and the electronic parts are visible through ventilation holes in the top and bottom of the unit. The power requirement is 120 VAC, 60 Hz, and a three wire grounded plug is necessary. The extra ground is not only for safety, but to insure reliable operation.

The unit comes with two rolls of paper, the connecting cable to the back of the TRS-80 keyboard unit and a twenty-two page instruction manual. The manual covers hook up, operation, paper loading, problems, specifications and provides a schematic. Programs in the manual include the use of the two control codes, printing continuously in the 16 character per line mode, assembly language driver routine and demonstration of lower case. Optional features include extra paper at \$3.95 for a package of 2 rolls, and the expansion interface connecting cable for \$19.95. The Quick Printer II sells for \$219.

I've finally found a personal computer I respect.

Compucolor II.

available in a personal computer.

The complete system is only \$1595.* And that price includes 8K user RAM, RS-232C compatibility and random access file capabilities.

Our 8 foreground and background colors will boost your comprehension, while introducing you to an exciting new dimension in BASIC programming. The vector graphics have 16,484 individually-accessible plot blocks. And the 13" diagonal measure screen gives you 32 lines of 64 ASCII characters. You also have the flexibility that comes with 16K Extended Disk BASIC ROM.

Compucolor II offers a number of other options and accessories, like a second disk drive and expanded keyboard, as well as expandability to 32K of user RAM. Of course we also have a whole library of low-cost Sof-Disk™ programs, including an assembler and text editor.

Visit your nearest computer store for details. And while you're there, do some comparison testing. With all due respect to the others, once you see it, you'll be sold on the Compucolor II.



**Compucolor
Corporation**



Unretouched photo of screen.
* U.S. Domestic price.

Compucolor Corporation • Intecolor Drive • Technology Park/Atlanta • Norcross, Georgia 30092 • Telephone 404/449-5996

Quick Printer, con't...

Operation

The unit is simple to operate. Controls include an on/off switch, a switch to select TRS-80 bus, line printer, or serial input and an on line/off line/ reset switch that can be used to interrupt a printout. At power on, the unit prints a READY message with a code indicating the input mode selected. The unit should be powered on prior to the computer and not turned off during computer operation to avoid a system lockup.

The paper is easy to load and unload, and the only other requirement for operation is software, which can be as simple as the commands LLIST and LPRINT.

Application

Quite frankly, there is a drastic difference in capability between the Quick Printer II and my dual pitch, 15 inch carriage, Micro Computer Devices Selectric. But not all the advantages are in favor of the Selectric. To get the Selectric working required \$30 in long distance telephone calls, two service calls from IBM and shipping the interface on a round trip coast to coast at a cost of \$20. I am terrified when I consider what the cost would be if it were out of warranty. With the Quick Printer II, I simply took it out of the box, read the instructions, plugged it in and it worked.



The Printer, instruction manual and paper.

Obviously I prefer to use the Selectric for articles and suspect that any editor receiving a long article printed on the Quick Printer II would immediately throw it in the trashcan! But for my own use, I prefer the quick printer for line listings. It is cheaper, much faster and much quieter. Once, when I was disassembling Level II BASIC for analysis, I had the Selectric running continuously for three and half hours. I was only one third of the way through when impending divorce terminated the project! My family could no longer tolerate the clatter.

But there is a particular use for which the Quick Printer II seems ideally suited. It makes a wonderful portable terminal for the TRS-80, so you don't have to carry the awkward, heavy, television set with you to use your computer away from home. Following a few simple steps, this is easy. First, keep in mind that the Quick Printer II will not support graphics characters. Then remember that it stores characters in a buffer until a carriage return is received. This calls for a little care in programming. For example, an input statement like this would not work:

```
100 INPUT "YOUR ANSWER"; A$
```

The statement and the prompt would be invisibly stored in the buffer, and you would not know why the printer was just sitting there. However, this simple modification would work:

```
100 PRINT "YOUR ANSWER?";  
INPUT A$
```

The carriage return at the end of the print statement would cause the line to be printed, serving as a prompt. Note that this requires a question mark in the print statement to indicate an input request as the question mark in the INPUT line will not be printed until the statement is received.

This simple program, executed prior to other programs, places the printer driver routine in place of the video driver in the computer, and will cause all print statements going to the screen to go to the printer instead:



© Creative Computing

```
1 FOR I = 16413 TO 16420:  
POKE I, PEEK(I + 8):NEXT I
```

This is not a total solution, as any values poked into screen memory and graphics characters will not be shown. But in programs designed or modified for mobile use, it can be very helpful.

It is quite easy to transport the keyboard, power supply, cassette recorder, printer and a three plug extension cord in a small suitcase. You could even take your computer to parties and introduce your friends to games set up for the printer, like



Quick Printer II from back, showing connectors and selection switches.

Hammurabi, Hunt the Wumpus, or Oregon Trail. For business use, there is the added attraction of a hard copy record of work accomplished. You could even do word processing on the Quick Printer II, saving the edited output on tape for later printout on another printer.

Recommendation

The sign in the small town reads: "There is no place like this place anywhere near this place, so this must be THE PLACE." That is the situation with the Quick Printer II. There is no other product that comes close to it in features and capability. With its choice of interfaces, it should be popular, not only with the Radio Shack computer, but with many others as well, particularly those with a built-in RS-232 serial port. The price is quite reasonable and the unit is very portable. I am quite happy with mine, and have only two complaints: Sometimes it prints the first line of a listing or print-out in 16 character per line format when I did not specify it, and if you pick up the printer and tilt it, the paper falls out and unrolls all over the floor. That is not a very nice feature in a printer that I use primarily as a portable, but I will either have to rig up a catch over the paper rod or learn to carry it upright.

There may be one further problem for prospective purchasers. Radio Shack has been having trouble obtaining the microprocessor chips in quantity, and the Quick Printer II may be backordered. I frankly expect a huge demand for it, not only for the price, but also for the features. □

SELECTOR III - C2

THE INFORMATION MANAGEMENT SYSTEM

Includes these Application Sub-Programs...

Sales Activity, Inventory, Payables, Receivables, Check/Expense Register, Library Functions, Mailing Labels, Appointments, Client/Patient Records



RANDOM, MULTI-KEY RECORD RETRIEVAL under CP/M, CDOS, IMDOS, ADOS ...

SELECTOR III-C2 ALLOWS INSTANT RECALL OF ANY RECORD USING ANY INFORMATION ITEM IN THE RECORD. That statement deserves re-reading, because that ability makes **SELECTOR III-C2** the most powerful information management system in microcomputers today!

The three major activities in business computing are...Word Processing, Financial Accounting, and the storing, processing, and reporting of information. The latter is where **SELECTOR III-C2** shines and fills the professional and personal need.

The system represents the state of the art using Micro-Ap's unique record indexing, query, and report writing methods. It's 'menu driven' and uses screen displays with all the instructions and error sensing that allow the novice to quickly learn the system and accomplish his tasks.

With **SELECTOR III-C2** you...

- define a record format assigning up to 24 fields as 'key' fields - meaning that records can be instantly recalled by name, date, quantity, ZIP Code, or whatever.
- create a file and begin entering edited and verified data immediately.
- browse through your file in key field order, making whatever changes or deletions needed.
- select collections of records meeting your exact requirements and arranged in the order wanted.
- create a unique report that contains the precise information you need - with numerical totals, averages, maxima, and minima - for any period of time and summarized by name, date...or by any item you want.
- bring an application on-line in hours instead of months.

CIRCLE 165 ON READER SERVICE CARD

SELECTOR III-C2 is a 'turn-key' system that can manage most applications as is. It includes source-code and pre-defined record formats and sub-programs to perform the tasks listed at top of page. Programmers can easily add other sub-programs - using the system's powerful utilities - to perform virtually any special computation or function required.

The system runs under CBASIC Vers. 2, and is priced at \$345. It's available in a variety of CP/M, disk formats including Dynabyte; North Star; Micropolis; TRS-80; Helios II; Heathkit; ICOM; Altair; Im-sai; Cromemco; and others.

Available from computer stores worldwide:

LIFEBOAT Associates

2248 Broadway, Suite 34,
New York, N.Y. 10024 • (212) 580-0082

Or order direct from

MICRO-AP

9807 Davona Drive, San Ramon, CA 94583
(415) 828-6697



A Low Cost Personal Computer

Interact Computer

Steve North

Although the power and sophistication of personal computers continues to leap forward, there have been few serious attempts to lower price barriers. Even the new Atari and Texas Instruments microcomputers, both solid but unsurprising efforts, are priced at or above the \$1000 level. Thus, we're pleased to report on a new, low-cost personal computer, the Interact Computer.

The Interact Computer comes in three configurations: the basic unit with a tape loader in ROM is \$499.95. The same computer with an RS-232 printer and communications port is \$599.95, and the Level II BASIC-in-ROM unit with the RS-232 interface is \$699.96. All the models include 16K RAM, color graphics, joysticks and plug into a TV set. The Interact has a built-in RF modulator for direct connection to the antenna terminals and apparently has FCC approval. A built-in cassette deck provides program and data storage.

The term "Level II" BASIC is an obvious allusion to TRS-80 Level II since Interact does not even have a "Level I" BASIC. It is also a somewhat inaccurate term because Interact Level II is not the same as TRS-80 Level II and some program conversions might be difficult. Both BASICs were written by Microsoft and customized for each particular machine, but Interact BASIC appears to be enhanced 8K BASIC whereas TRS-80 Level II is enhanced Extended 12K BASIC. The Interact does not have IF-THEN-ELSE (only IF-THEN), PRINT USING, EDIT, AUTO, or integer and double precision variables. However, it retains many of the most powerful features of TRS-80 Level II, such as multidimensional arrays, character string arrays, PEEK, POKE, single character input, etc. In addition, Interact BASIC has several statements for high-level control of the display color, text scrolling window and audio output.

The graphics are in 8 colors and 78 x 113 resolution, which is sufficient for most games and applications. By comparison, the Apple has 16 colors in 40 x 40 resolution, or 6 colors in 160 x 280 high-resolution mode. The Interact is at a noticeable disadvantage when it comes to text, though, since characters are displayed as dot matrix patterns on the same grid, yielding very large squarish letters and numbers. As a result the text display is 12 lines of 17 characters, equivalent to 3 or 4 lines of BASIC — a handicap if you write your own programs. However, the color graphics are good for a computer in this price bracket.

The Interact computer has monophonic audio output through the TV speaker, useful for sound effects and simple tunes. The computer can also channel the cassette audio input to the TV speaker so you can hear tapes as they load, a nice feature.

The joysticks are not true analog inputs, but work by activating contact switches to detect the direction in which the stick is pushed. Each joystick has a "fire" button and a control knob mounted at the end of the stick for analog input, such as game paddle positioning. The keyboard layout is like a typewriter but there are spaces between the keys. The keys work like calculator buttons, to be stabbed at rather than gently pressed, which is fine for hunt-and-peck typists but not for touch-typists. We also had a little trouble with bad contacts in the joystick units. This could probably be

corrected with some TV Tuner aerosol cleaner or, at the very worst, by taking the joysticks apart and cleaning them.

The Interact Computer is not supplied with software from second sources yet, but Interact has released an adequate line of games and applications on its own. Our favorite games were Breakthrough (a Break-out-style game), Backgammon and Dogfight. This last game commanded the time of our software development staff for almost a half hour a day while the Interact was in our office, revealing at least one latent Red Baron (and also some dissatisfaction with the joystick units). Interact also has over 20 other tapes, including Star Trek, Computer Maze, Hangman, Music Maestro, Compute-a-Color (a color etch-a-sketch program) and two Financial Planning cassettes. Most of the Interact software is very good (but not mind-blowing) and the prices (around \$14.95 a program) are likewise OK but not exceptional.

In summary, the good points of the Interact are:

- *Inexpensive
- *Good BASIC
- *Color Graphics

And the bad:

- *Not expandable
- *Limited text displays
- *Keyboard and joystick quality

In interpreting this review, please keep in mind that it's not very significant to compare a \$600 computer like the Interact, with a computer costing two or three times as much. For example, the Apple has a better keyboard, expandability and more software, but it costs \$1195. If you pay less, you have to expect to give up something. For its price, the Interact is a good performer and it's worth your consideration if you're looking for an under-\$1000 personal computer. □



DIGITAL RESEARCH

- CP/M* Floppy Diskette Operating System** — Packages supplied on diskette complete with 8080 assembler, text editor, 8080 debugger and various utilities plus full documentation. CP/M available configured for most popular computerized systems including: North Star Single, Double or Quad density, Altair 8, doks, Helios II, Eddy Sorcerer, Vector MZ, PolyMorphic 8813H, Heath H171 or H89, TRS-101, COM 3212 and COM Macro Disk plus many other configurations available off the shelf. **\$145/\$25**
- MAC** — 8080 Macro Assembler. Full Intel macro definitions. Pseudo code, include, RPL, RPL, TITLE, PAGE, and MACLIB. Z-80 library included. Provides Intel absolute hex output plus symbols file for use by SID (see below). **\$100/\$15**
- SID** — 8080 symbolic debugger. Full trace, pass sound and break-point program testing system with back trace and histogram utilities. When used with MAC, provides full symbolic display of memory labels and equated values. **\$85/\$15**
- TEX** — Text formatter to create paginated, page-numbered and justified copy from source text files, detachable to disk or printer. **\$85/\$15**
- DESPOOL** — Program to permit simultaneous printing of data from disk while user executes another program from the console. **\$50/\$10**

MICROSOFT

- Disk Extended BASIC** — Version 5, ANSI compatible with long variable names, WHILE/WEND, chaining, variable length file records. **\$300/\$25**
- BASIC Compiler** — Language compatible with Version 5 Microsoft interpreter and 3-10 times faster execution. Produces standard Microsoft relocatable binary output. Includes Macro-80. Also includes FORTRAN-80 or COBOL-80 code modules. **\$350/\$25**
- FORTAN-80** — ANSI 74 (except for COMPLEX) plus many extensions. Includes relocatable object compiler, linking loader, library with manager. Also includes MACRO-80 (see below). **\$400/\$25**
- COBOL-80** — ANSI 74 Relocatable object compiler. Format same as FORTRAN-80 and MACRO-80 modules. Complete ISAM, interactive ACCEPT/DISPLAY, COPY, EXTEND. **\$625/\$25**
- MACRO-80** — 8080/8085 Macro Assembler. Intel and Z80 mnemonics supported. Relocatable linkable output. Loader, Library Manager and Cross Reference List utilities included. **\$149/\$15**
- EDIT-80** — Very fast random access text editor for text with or without line numbers. Global and in-line commands supported. File compare utility included. **\$89/\$15**

MICRO FOCUS

- CIS COBOL (standard)** — ANSI 74 COBOL standard compiler fully validated by U.S. Navy tests to ANSI level 1. Supports partitioned files to level 2 including dynamic loading of COBOL modules and a full ISAM file facility. Also, provides segmentation, interactive debug and powerful interactive extensions to support protected and unprotected CRT screen formatting from COBOL programs used with any dump terminal. **\$650/\$50**
- CIS COBOL (compact)** — COBOL subset compiler for use on a 32K byte microcontroller. Valuable range of COBOL languages, why at level 2 and including ISAM and the CIS COBOL interactive screen formatting of dumb terminals. **\$650/\$50**
- Forms 1** — CRT screen editor to build application CRT formats with protected and unprotected field areas. Output is COBOL data designed for copying into CIS COBOL programs. Includes structure of writing entries input and output descriptions by hand and greatly speeds interactive application programming. Output requires CIS COBOL compact compiler. **\$125/\$20**
- Forms 2** — Forms 1 screen editor plus indexed file application program generator. Automatically creates a query and update program in indexed files using CRT protected and unprotected field formats. No programming experience needed. Output program directly compiled by either of CIS COBOL compilers. **\$200/\$20**

EIDOS SYSTEMS

- KISS** — Keyed Index Sequential Search. Offers complete Multi-Keyed Index Sequential and Direct Access file management. Includes built-in utility functions for 16 or 32 bit arithmetic, string/integer conversion and string compare. Delivered as a relocatable module in Microsoft format for use with FORTRAN-80 or COBOL-80, etc. **\$535/\$25**
- KBASIC** — Microsoft Disk Extended BASIC with all KISS facilities, integrated by implementation of nine additional commands in language. Package includes KISS-REL as described above, and a sample mail list program. **\$995/\$45**

*CP/M is a trade name of Digital Research.

*Z80 is a trademark of Zilog, Inc.

*UNIX is a trademark of Bell Laboratories.

***WHATSIIT? is a trademark of Computer Hardware.

*CP/M for Heath, TRS-80 Model I and PolyMorphic 8813 are modified and must-use respectively compiled versions of system and application software.

*PolyMorphic 8813 CP/M scheduled for September 15 release.

Prices and specifications subject to change without notice.

Software for most popular 8080/8085 computer disk systems including **NORTH STAR, iCOM, MICROPOLIS, DYNABYTE DB8/2, EXIDY SORCERER, SD SYSTEMS, ALTAIR, VECTOR MZ, 8" IBM, HEATH H17 & H89, HELIOS, IMSAI VDP42 & 44, REX, POLYMORPHIC 8813, OHIO SCIENTIFIC and IMS 5000 formats.**

Shopping List No. 6

*The Software Supermarket is a trademark of Lifeboat Associates

All Micropro prices are discounted!

MICROPRO

- Super-Sort I** — Sort, merge, extract utility as absolute executable program or linkable module in Micropro format. Sorts fixed or variable records with data in binary, BCD, Packed Decimal, EBCDIC, ASCII, floating, fixed point, exponential, held justified, etc. etc. Even variable number of fields per record. **\$225/\$25**
- Super-Sort II** — Above available as absolute program only. **\$175/\$25**
- Super-Sort III** — As if without SELECT/EXCLUDE. **\$125/\$25**
- Word-Star** — Menu driven visual word processing system for use with standard terminals. Text formatting performed on screen. Facilities for text pagination, page number, justify, center and underscore. User can print one document while simultaneously editing a second. Edit facilities include global search and replace, read write to other text files, block move, etc. Requires CRT terminal with addressable cursor positioning. **\$445/\$25**
- Word-Master Text Editor** — In one mode has supervisor of CP/M's ED commands including global searching and replacing, forward and backward in file. In video mode, provides full screen editor for users with serial addressable cursor terminal. **\$125/\$25**

SOFTWARE SYSTEMS

- CBASIC-2 Disk Extended BASIC** — Non-interactive BASIC with pseudo-code compiler and runtime interpreter. Supports full file control, chaining, integer and extended precision variables, etc. **\$109/\$15**

Structured Systems prices are discounted!

STRUCTURED SYSTEMS GROUP

- General Ledger** — Interactive and flexible system providing proof and report outputs. Customization of COA created interactively. Multiple branch accounting centers. Extensive checking performed at data entry for proof, COA correctness, etc. Journal entries may be batched prior to posting. Closing procedure automatically backs up input files. All reports can be tailored as necessary. Requires CBASIC. **\$899/\$25**
- Accounts Receivable** — Open item system with output for internal aging reports and customer-oriented statement and billing purposes. On-Line Inquiry permits information for Customer Service and Credit departments. Interface to General Ledger provided in both systems used. Requires CBASIC. **\$699/\$25**
- Accounts Payable** — Provides aging statements of accounts by vendor with check writing for selected invoices. Can be used alone or with General Ledger and/or with NAD. Requires CBASIC. **\$699/\$25**
- LETTERRIGHT** — Program to create, edit, and type letters or other documents. Facilities to enter, display, delete and move text with dual video screen presentation. Designed to interface with NAD for form letter mailings. Requires CBASIC. **\$179/\$25**
- NAD Name and Address selection system** — Interactive mail list creation and maintenance program with output as full reports with reference data or restricted information for mail labels. Transfer system for extraction and transfer of selected records to create new files. Requires CBASIC. **\$79/\$20**
- QSORT** — Fast sort/merge program for files with fixed record length, variable field length information. Up to five ascending or descending keys. Full back-up of input files created. **\$95/\$20**

GRAHAM-DORIAN SOFTWARE SYSTEMS

- PAYROLL SYSTEM** — Maintains employee master file. Computes payroll withholding for FICA, Federal and State taxes. Prints payroll register, checks, quarterly reports and W-2 forms. Can generate ad hoc reports and employee form letters with mail labels. Requires CBASIC. Supplied in source code. **\$590/\$35**
- APARTMENT MANAGEMENT SYSTEM** — Financial management system for receipts and security deposits of apartment projects. Captures data on vacancies, revenues, etc. for annual trend analysis. Daily report arrives late rents, vacancy notices, vacancies, income lost through vacancies, etc. Requires CBASIC. Supplied in source code. **\$590/\$35**
- INVENTORY SYSTEM** — Captures stock levels, costs, sources, sales, aging, turnover, markup, etc. Transaction information may be entered for reporting by salesman, type of sale, date of sale, etc. Reports available both for accounting and decision making. Requires CBASIC. Supplied in source code. **\$590/\$35**
- CASH REGISTER** — Maintains files on daily sales. Files data by sales person and item. Tracks sales, overruns, refunds, payouts and total net deposits. Requires CBASIC. Supplied in source code. **\$590/\$35**
- tiny C** — Interactive interpretative system for teaching structured programming techniques. Manual includes full source listings. **\$75/\$40**

- BDS C Compiler** — Supports most major features of language, including Structures, Arrays, Pointers, recursive function evaluation. Linkable with library to 8080 binary output. Lacks data initialization, long float type and static register class specifiers. Documentation includes C Programming Language book by Kernighan & Ritchie. **\$110/\$15**
- Whitesmith's C Compiler** — The ultimate in systems software tools. Produces faster code than Pascal with more extensive facilities. Conforms to the full UNIX Version 2 C standard. Described by Kernighan and Ritchie, and available over 75 functions for performing I/O, string manipulation and storage allocation. Compiler output in A-Natural source. Supplied with A-Natural (see below) requires 80K CP/M. **\$830/\$30**
- A-Natural** — Narrative assembler with linking loader, extensive cross referencing library in A-Natural relocatable format. Translates from A-Natural source to Microsoft Macro-80 source and from A-Natural rel to source. **\$330/\$15**
- ALGOL 60 Compiler** — Powerful block-structured language featuring economical run time dynamic allocation of memory. Very compact (24K total RAM) system implementing almost all Algol 60 report features plus many powerful extensions including string handling direct disk address I/O etc. Requires Z80 CPU. **\$199/\$20**
- Z80 Development Package** — Consists of: (1) disk file editor, with global in-line and in-line facilities; (2) Z80 relocating assembler, Zilog Mosaic mnemonics, conditional assembly and cross reference table capabilities; (3) linking loader producing absolute hex disk file. **\$95/\$20**
- ZDT** — Z80 Debugger to load, break and examine registers with standard Zilog Mosaic mnemonics. Disassembly displays 4 bytes near to DDT \$35 when ordered with Z80 Development Package. **\$50/\$10**
- DISTEL** — Disk based disassembler to Intel 8080 or TDLXitan Z80 source code, listing and cross reference files. Intel or TDLXitan pseudo ops optional. Runs on 8080. **\$65/\$10**
- DISLOG** — As DISTEL to Zilog Mosaic mnemonics. Runs on Z80 only. **\$65/\$10**
- TEXTWRITER III** — Text formatter to justify and paginate letters and other documents. Special features include insertion of text during execution from other disk files or console, permitting receipt documents to be created from linked fragments on other files. Has facilities for sorted index, table of contents and footnote insertions. Ideal for contracts, manuals, etc. **\$125/\$20**
- Postmaster** — A comprehensive package for mail list maintenance. Features include record extraction and label production. A note with program is included which provides real time on single sheet or continuous forms. Requires CBASIC. **\$150/\$25**
- WHATSIIT?***** — Interactive data-base system using associative tags to retrieve information by subject. Hashing and random access used for fast response. Requires CBASIC. **\$125/\$25**
- XYBASIC** — Interactive Process Control BASIC — Full disk BASIC features plus unique commands to handle bytes, rotate and shift, and to test and set bits. Available in integer, Extended and ROMable versions. Integer Disk or Integer ROMable. **\$295/\$25**
Extended Disk or Extended ROMable. **\$395/\$25**
- SMAL/80** — Structured Macro Assembled Language — Package of powerful general purpose text macro processor and SMAL structured language compiler. SMAL is an assembler language with IF-THEN-ELSE, LOOP, REPEAT-WHILE, DO-END, BEGIN-END constructs. **\$75/\$15**
- SELECTOR II** — Data Base Processor to create and maintain single key data bases. Prints formatted, sorted reports with numerical summaries. Available for Microsoft and CBASIC (static entry). Supplied in source code. **\$195/\$20**
- SELECTOR III** — Multi (i.e. up to 24) key version of Selector II. Comes with applications programs including Sales Activity, Inventory, Payables, Receivables, Check Register, Expenses, Appointments, and Client/Patient. Requires CBASIC. Supplied in source code. **\$395/\$20**
Enhanced version for CBASIC-2. **\$345/\$20**
- CPM/374X Utility Package** — Has full range of functions to create or re-name an IBM 3741 volume, display directory information and edit the data file contents. Provides full file transfer facilities between 3741 volume data sets and CP/M files. **\$195/\$10**
- BASIC UTILITY DISK** — Consists of: (1) CRUNCH-14 — Compacting utility to reduce the size and increase the speed of programs in Microsoft Basic and TRS-80 Basic. (2) DPFUN — Debug precision subroutines for computing between 16 and 32 bit numbers. Includes various root, natural log, log base 10, sin, arc sin, hyperbolic arc sin, etc. Furnished in source code on diskette and documentation. **\$50/\$35**
- STRING BITS** — Forth character string handling. Routines to find, fill, pack, split, separate, concatenate and compare character strings. The package completely eliminates the problems associated with character string handling in FORTRAN. Supplied with source. **\$40/\$15**
- Flippy Disk Kit** — Template and instructions to modify single sided 5 1/4" diskettes for use of second side in single sided drives. **\$12/\$50**



Orders must specify: disk systems and formats, e.g. 1600K 5 1/4" single or double density, IBM single or 20250, Altair, Helios II, Micropro Mod II or 5 1/4" soft sector (Macro-80/SD Systems Dynabyte), etc. Add \$1.00 shipping (\$2 min.). Add \$1.00 additional for UPS C.O.D. Manual cost applicable against price of subsequent software purchase. The sale of each proprietary software package conveys a license for use on one system only.

Lifeboat Associates, 2246 Broadway, N.Y., N.Y. 10024 (212) 580-0082 Telex: 668585



Three User-Definable Character Generators for the Apple

Steve North

A few years ago a personal computer called the ECO Micromind was heavily advertised but never actually came to the market. The main attraction of this not very tangible machine was its user-definable character set, allowing one to program special characters like little spaceships, chess pieces, the Greek alphabet and so on. Interestingly enough, this capability has always existed in the Apple II computer, and the software for user-definable character generation is available now. (This reveals exceptional foresight in designing a personal computer with such latent capabilities waiting only for the right software to be written.)

The basic technique makes use of Apple high-resolution graphics. The Apple can plot 53760 points on a 192 x 280 grid, which many people use for graphs, pictures, games, etc. This grid can also be broken down into blocks in a 24 x 40 format and then each point is used as part of the dot matrix in forming characters. This layout yields the same number of characters on the screen as in normal text mode, but the character fonts are software controlled. So you can display upper and lower case characters, or anything else you can draw within an 8 x 7 matrix. One minor drawback to this scheme is that it requires extra memory and software to generate the displays, scrolling, cursor movement and other screen functions.

For this review we tried three different packages for creating and displaying user-definable characters.

High-Resolution Character Generator (by Programma) is a disk-based set of programs. A machine-language routine called Hires-Writer actually creates the text displayed on the high-resolution graphics screen. When the disk is bootstrapped, Hires Writer and the binary data for two character sets (normal upper-lower



Programma High Resolution Character Generator.

case and Greek) are loaded from disk and the character generator software is activated. Characters from both character sets can be displayed on the screen at the same time, but obviously only one may be selected for printing. Control characters allow you to switch from one character set to another, set upper or lower case, video inverse, move the cursor, initialize the screen, etc. For example, typing or printing control-R means that all following characters will be in lower case. Control-S returns to upper case. This allows entry and display of lower case although the keyboard is upper case only.



Programma character definition mode.

The Hires Writer program works within a user-defined window which can be the entire screen or any portion of it. The boundary rows and columns are poked into low memory. Hires Writer is completely transparent to Integer BASIC, Applesoft in ROM and the Disk Operating System. It won't work with Applesoft in RAM.


To define your own special characters, the disk includes a program called CHAR GEN which lets you set up the dot matrix for any character in either character set, using a larger display with asterisks for the points. When you're done you can write the new character set onto a disk file.

Overall, we rate this product highly. The documentation is sufficient and the software is easy to use even if you don't know anything about machine language. \$19.95 from Programma International, Inc. 3400 Wilshire Blvd., Los Angeles, CA 90010. (213) 384-0579.

Superchip (by Eclectic Corporation) is a ROM that plugs into the empty socket at D000 on the Apple motherboard. Thus, it is not necessary to load any software from cassette or disk: merely type "D000G" when the Apple is turned on, and thereafter the high-resolution character display is activated. The Superchip supports upper and lower case (with descenders), cursor control, tabs (with eight user-settable stops), a text window, reverse video, one special character or an entire set, screen clear, etc. Setting up alternate character sets is done by creating a binary table in memory. Eclectic supplies a program called Character Edit for creating the table on cassette (for \$19.95 extra) but we did not get one with our review copy, so we can't comment on its operation.

Superchip has two unusual features: character rotation and editing. When control-T is printed on the

screen, the character behind the cursor is rotated —90 degrees. This allows you to easily print characters sideways and upside down. (A neat idea, but probably not something you'll use everyday.) The edit mode operates on any record on the screen (any set of characters separated by a carriage return) with character insertion and deletion. Superchip also has 30 new built-in characters, mostly math symbols. It works with both Integer BASIC and Applesoft in ROM, but not with the DOS, because the Superchip software was written before the Apple Disk was available. (Machine language routines to connect DOS with Superchip are available for \$19.95.) However it is possible to load and save programs from disk by de-activating Superchip. One minor difference between Superchip and the two other packages is that Superchip stores lower case characters as lower case internally. The other packages apparently just convert the output to lower case as it is displayed.

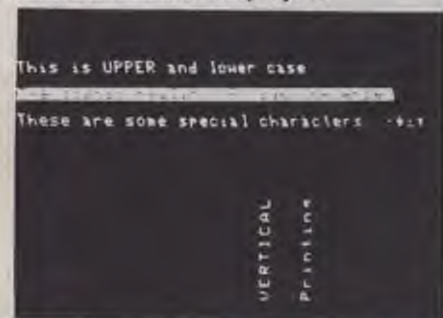

Superchip display.

In summary, Superchip would be a good choice if you don't have a disk, don't want to load software from cassette or disk, or if having descenders character rotation, or other Superchip features is important to you. It also saves some of your memory by putting most of the routines in ROM, but it's expensive. \$99.95 from Eclectic Corporation, 2830 Walnut Hill Lane, Dallas, TX 75229. (214) 358-1307.

The Screen Machine (by Softape) is sold on cassette but works with both cassette and disk systems. The Screen Machine character generator program is executed to initialize a character set and enable the display. The Screen Machine comes with a standard character set built-in, but you can modify it or enter completely new characters, with a blown-up display of the dot matrix. The entire character set and software drivers to display it (called a prefix) may be saved on tape or disk. The prefix can



Softape Screen Machine definition mode.

later be appended to your own BASIC programs or loaded by itself for software testing and development, thus eliminating the need to always load a separate program first.

The Screen Machine also operates on a text window and has control characters to switch between upper and lower case, like the other high-resolution character generators. It also has some advanced features for graphics manipulations which appear to be ideal for animation. For example, besides sending the character output straight to the hi-res graphics page, the software can maintain both a "source page" and a "destination page," and can do operations involving both the source page and the character to be displayed to create the destination page. This feature is probably beyond the needs of most users but would be very handy for graphics rotation and animation.

In addition to this software, the Screen Machine comes with a Hi-res-Graphics Prefix which you can incorporate into your Integer BASIC programs to do normal point and vector plotting much like the Applesoft II Hi-res routines. The manual lists the entry points to the machine language subroutines and gives several examples. It does not seem possible to have multiple character sets since the



Screen Machine in use.

character data is stored at one fixed location in memory.

Overall, the Screen Machine is a nicely conceived package. Although it does not have character rotation or multiple character sets, some of its other functions are at least as exotic as those of the other two programs. Available for \$19.95 from Softape, 10432 Burbank Blvd., North Hollywood, CA 91601. (213) 985-5763.

The Dan Paymar Lower Case Adapter is worth mentioning in this review, although it does not provide user-defined characters, because it's one of the simplest ways to get lower-case characters. The LCA is a small plug-in board which adds a second video generator ROM for lower case. Lower case characters written to the screen are automatically displayed as lower case, thus obviating the need to reserve more than 8K of memory for the high-resolution screen map and output drivers. It also functions with low-resolution color graphics and text editors. Unfortunately the LCA is not totally hardware-based because the Apple I/O routines convert lower-case bit patterns to upper-case, and the keyboard is unable to encode lower case, so a short BASIC subroutine is required. If all you want is to add lower case characters, then this may be the best way to do it. Also note that the Dan Paymar Lower Case Adapter would not prevent use of a separate high-resolution character generator. \$49.95 from Dan Paymar, P.O. Box A-133, C.S. 6800, Costa Mesa, CA 92627.

Conclusion

If you have an Apple computer, it's probably worth your while to buy one of these packages. In this particular case, all the products reviewed are excellent (but varying somewhat in price) and your choice will depend on the particular features in which you're interested. They all expand the power of the Apple graphics immensely with only moderate memory requirements. One feature I wish someone had included was smooth scrolling, i.e., scrolling a part of a line at a time instead of the entire line so that the display changes smoothly instead of jumping. Though this might have been too slow for practical usage. Remember before buying that although the hi-resolution character generators are transparent to BASIC programs, they still require extra memory for the screen and driving software. The Superchip works in a 16K system, and the other two programs require at least 24K. □


HERE'S THE OHIO SCIENTIFIC

The simple fact is nobody — nobody in the personal computer industry — offers more software than Ohio Scientific! Right now, as you read this, Ohio Scientific has just about 2 million bytes of software available for our C4P MF computer.

This software is also available for Ohio Scientific C8P DF. Most is available for the C1P MF and cassette-based Ohio Scientific computers. Consult full line price list for cassette software.


Software includes educational programs, personal programs, business programs, utility programs, game programs and operating systems. Each month Ohio Scientific is developing additional programs for your use and enjoyment.

Each diskette has 6 to 10 programs. Highlights of each are listed below.

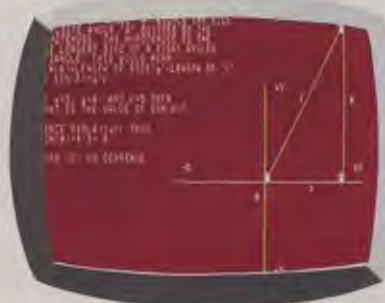

Educational Programs

- ED1 Math, spelling and geography tutors; Hangman, an addition game and more. \$ 29
- ED2 Six "How To" lessons on beginning BASIC techniques. \$ 29
- ED3 Trig tutor, presidents, continents and solar system quizzes, math drills and more. \$ 29
- ED4 Comprehensive math disk covering trig functions, logarithmic functions, matrices and more. \$ 29
- ED5 Covers the metric system (tutor, quiz and conversions) Roman numerals and time telling. \$ 29
- ED6 Advanced sciences (2-disk set) including nuclear and organic chemistry, genetics, physics equations and function graphics. \$ 29
- *ED7 Alphabet tutor and quiz, number tutor, memory match and recall game (color & B/W). \$ 29
- ED8 Language disk, covering vocabulary and verbs for German, French and Spanish. \$ 29
- ED9 Word search game and Hangman drawing, with large on-line data bases, and more. \$ 29
- MDMS—EDUCATION SYSTEM. Easily create your own quizzes and tutorials with built-in grading. \$ 29

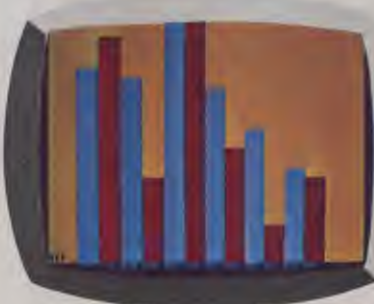

Business Programs

- BD1 Ratio analysis, bonds, loan interest, bar graph and more. \$ 29
- BD2 BASIC word processor, mailing list, address book, advertisement demo and more. \$ 29
- *BD3 Comprehensive annual histogram plotting & editing (color and B&W). \$ 29
- MDMS Ohio Scientific's mini data base management systems. Master file create, edit, dump, report writer and much more. \$ 49
- MDMS—AUX. I Repack, keyfile, sort, report writer, record access and more. \$ 29
- MDMS—A/P Update anytime, print journals, age analysis, vendor list and more. \$ 29
- MDMS—A/R Update anytime, print journals, age analysis, customer list and more. \$ 29
- MDMS—INVENTORY Updates, editing, item search, summary report and more. \$ 29
- MDMS—PAYROLL Complete employee records including earnings and all tax deductions. \$ 29
- MDMS—MAILING LIST Enter, delete and print out. \$ 29
- MDMS—CHECKING, SAVINGS ACCOUNTS Precise disk-based account records for your finances. \$ 29
- MDMS—PERSONAL CALENDAR/ADDRESS- PHONE BOOK. Daily appointments, addresses and phone numbers at your fingertips. \$ 29
- *OS-WP2 full word processing on a mini-floppy. \$200



Game Programs

- GD1 Starwars, Hectic, Bomber, Torpedo, Space War and Breakout. \$ 29
- GD2 Sketch, Racer, Destroyer, Lander, Hide 'n Seek, Bomber, Tiger Tank. \$ 29
- GD3 Star Trek, Cryptograms, Blackjack, Hangman, 23 Matches. \$ 29
- GD4 Frustration, Battleship, Tic-Tac-Toe, Civil War, Mastermind. \$ 29

- GD5 Baseball, Golf, Bowling, Hockey. \$ 29
- GD6 Poker, Blackjack, Spades, Hearts, Slot Machine. \$ 29
- *GD7 (Joystick systems only) Joystick Sketch, Tiger Tank, Roadrace, Space Attack, Blockade. \$ 29
- *GD8 (Joystick systems only) Zulu 9, High Noon, Star Wars, Bomber, Surround. \$ 29
- GD9 Othello, Concentration, Flip-Flop, Illusion and more. \$ 29
- *GD10 (2 disk set) Cartoons, Fairy Tales and animations, including Hero, Three Little Pigs, Humpty Dumpty and many more. \$ 29



Personal Programs

- PD1 Annuities, rate of return, biorhythm, calorie counter, checking and savings. \$ 29
- PD2 Trend line, base conversions, powers, integrals and more. \$ 29




Utility Programs

- 6SD Aux. I Resequencer, BASIC disassembler, memory test, sort and more. \$ 29
- *Graphics I Fast, high resolution (64 x 128) plotting of functions and parametric equations, plus easy keyboard set up and storage of graphics displays. \$ 29
- *DAC I (2 disk set) State-of-the-Art DAC music generation, capable of producing up to 4 note chords, with disk storage option. \$ 39
- *Home Control II Advanced home control programs. \$ 39

*Not available for C1P MF.

CREATIVE COMPUTING

TIFIC SOFTWARE STORY

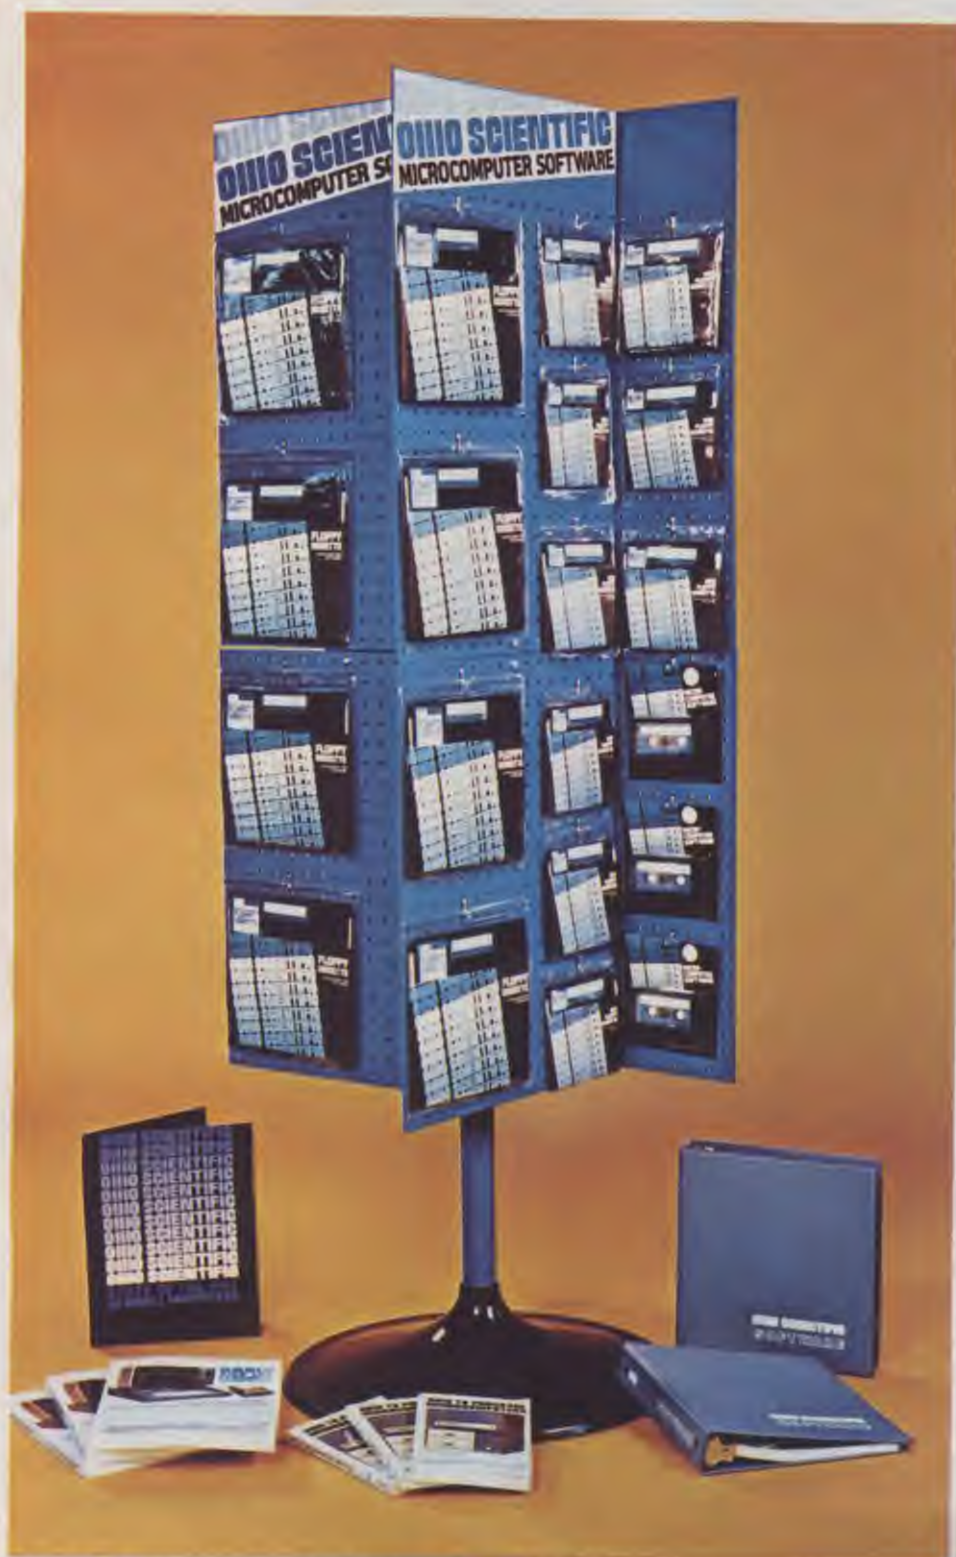

Close to 2 million bytes of software available!



Operating Systems

(These programs come with your Ohio Scientific computer.)

OS 6SD V3.1 The standard Ohio Scientific mini-floppy operating system. 9 digit floating decimal point, Microsoft BASIC, random, sequential files and graphics.

***Home Control I** This new disk-based operating system affords the user flexible, real-time based AC monitoring and control.

Standard

***Customer Demo.** Self-starting demo for the first-time user. Introduces the main categories of Ohio Scientific personal computer software.

***Dealer Demo.** More advanced demo, highlighting many of the optional accessories.

*Not available for CIP MF.

**to be continued,
continuously!**

All of Ohio Scientific's family of personal computers offer the fastest BASIC-in-ROM — or on Disk in the microcomputer industry. When ordering, be sure to specify series. Many additional educational, business and personal programs and games are available. Consult your Ohio Scientific Dealer.

OHIO SCIENTIFIC

1333 S. Chillicothe Road
Aurora, Ohio 44202
(216) 562-3101

CIRCLE 177 ON READER SERVICE CARD



TRS-80 Level III BASIC

David Bunnell

My Level II TRS-80 Computer with 16K RAM memory has more power than any other Level II TRS-80 Computer with 16K RAM in the world! But since this will be short-lived, I want to tell you about it now while it lasts.

The secret to my powerful TRS-80 is that its Level II BASIC has been "enhanced" by a new software package called Level III BASIC. Written by Microsoft, the same company that wrote Level II BASIC, Altair BASIC, PET BASIC, Applesoft BASIC and several others, Level III BASIC comes on cassette tape and takes 5.2K of RAM memory. It was previously sold under the G2 label from GRT Corporation but since they've gone out of business it is now being sold by Microsoft Consumer Products for \$49.95 (10800 N.E. 8th, Suite 819, Bellevue, WA 98004). One of their dealers is Lifeboat Associates, 2248 Broadway, NY, NY 10024.

I'm a free-lance writer who was fortunate enough to write the instruction booklet for Level III. I virtually "lived with" Level III BASIC for six weeks and I'm anxious to let other people know what I found out about this new software.

But before I go on, let me assure you that while I am enthusiastic about Level III, I am not writing this as a favor for anyone. In fact, I have some critical observations to make that Microsoft would probably rather not be included.

System Requirements

Level III BASIC was written primarily for TRS-80 Computers with Level II BASIC and 16K RAM memory.

David Bunnell, 4629 Geary, San Francisco, CA 94118.

However, it is also being marketed to people who have TRS-80 systems with Expansion Interfaces and disk drives. One feature, the TIME\$ string, was written to take advantage of the Real Time Clock, which is a part of the Expansion Interface. Another feature, the PRINT#-3 command, will let you output information through the RS-232 port if you have an Expansion Interface with this option.

You can use Level III if you have a TRS-80 with disk drives, but it will not work with Disk BASIC. You can simply store it on disk as a file and then load it on top of Level II BASIC.

You can use Level III if you have a TRS-80 with disk drives, but it will not work with Disk BASIC.

So be advised, the advantages of Level III BASIC for disk systems is marginal. Any program written in Level III BASIC can only be stored on cassette tape. You cannot store Level III programs on your disk.

Why would anyone with a TRS-80 disk system buy Level III BASIC? The answer is that in addition to adding many Disk BASIC features to Level II BASIC, Level III BASIC also adds some features that are currently unique to both Level II BASIC and Disk BASIC. The most important of these are some powerful new graphic statements that make it much easier to write TRS-80 programs with charts, graphs and even crude animation.

Other features unique to Level III include: renumbering program lines, single-stroke instructions, new SAVE and LOAD commands and the option of setting a time limit for responses to

INPUT prompts.

The remaining features of Level III BASIC are all TRS-80 Disk BASIC features. They include: spelled-out error messages, 10 user-defined routines, LINE INPUT statement, more flexible MID\$, INSTR string, user-defined functions and hex and octal conversion.

Most of these features will be discussed in more detail, but first, the price of Level III, which is \$49.95, should be mentioned. We all realize that there are always new things to buy for our computers, whether they be software packages, programs, hardware options, or peripherals. Therefore, the question should be: Does Level III add enough new capability to an already powerful Level II BASIC to make it worth the investment?

If you like graphics in your programs and want to write programs with graphics, then the answer to the above question is probably "yes." Actually, you can't do anything graphically with Level III BASIC that can't be done with Level II, however Level III makes it much easier and more efficient (you use up less memory).

Graphics Capability

The Level III graphic statement, LINE, lets you draw either a line or a rectangle on the screen between any two designated points. You don't have to methodically plot out every point as you do with Level II.

The LINE statement works in two modes, graphics mode and character mode. In the first of these, the screen is divided into a grid that is 128 across by 48 down. In character mode, the resolution is not so fine (64 by 16), but

Level III, con't...

motion across the screen is much faster. Character mode also gives you the option of drawing on the screen with alphanumeric characters or any of Level II's graphic characters (remember the CHR\$ string?).

In addition to the LINE statement, Level III also adds a GET @ and PUT @ statement. These statements let you save a graphic array (called GETting an array) to be put back on the screen at any designated position (called PUTting an array). These statements greatly simplify the procedures for writing programs with animation. They can also be used to save the format of charts or graphs which you might want to display on the screen at different times with different numbers or labels.

My main complaint about Level III graphics is the same as my complaint about Level II graphics, which is the screen just doesn't give you fine enough resolution. Try generating a circle and you'll see why higher resolution is more desirable. Only the crudest figures can be drawn with Level III.

Renumbering and "Single-Stroke" Capabilities

One of the concepts behind Level III BASIC is that it has enough features so that there is something for just about everyone. It may or may not really accomplish this goal. The next most important feature after graphics is renumbering program lines. If

You can't do anything graphically with Level III BASIC that can't be done with Level II, however Level III makes it much easier and more efficient.

you've done much programming at all, you'll like this one. The Level III instruction for renumbering program lines is the NAME command. It is a flexible command, one that demonstrates the level of care for the user that has gone into most of Level III.

Using the NAME command, you can renumber program lines beginning at any location in the program. The chosen location can have any designated line number as long as it is greater than the previous line number. And, the following line num-

bers can be incremented by any number, as long as you don't go beyond 65,529.

One more thing; the NAME command automatically updates all the line number references following GOTO, GOSUB, THEN, ELSE, etc.

Some people feel that single-stroke instructions are the most important features of Level III BASIC. Actually, "single-stroke" is somewhat misleading and in deference to this, the Level III manual refers to them as "Shift-Key Entries." By pressing the SHIFT key and one of the letter keys (A-Z) you can enter an instruction, command, or any string up to 15 characters into the computer. In other words, instead of typing LIST and pressing the ENTER key each time you want to list a program, you can simply enter SHIFT L. To run a program, you simply enter SHIFT R.

Level III maintains a list of 26 Shift-Key Entries, but the really important thing is that they are user changeable. By using the new LSET command, you can change the Shift Keys to anything you want, including commonly used INPUT responses. And, just in case you ever figure out how to modify your TRS-80 for upper/lower case, you can turn the Shift-Keys off by typing LSET RESET and pressing ENTER. The command for turning them back on is LSET SET.

Strings and Other Things

Level III BASIC expands the use of INPUT statements in two important ways. First, by using the new statement, LINE INPUT, your program will accept inputs that include commas, quotation marks, dashes and all other punctuation marks. Also, LINE INPUT eliminates the automatic question mark (?) prompt. If you want a question mark, you simply include it in the prompt string.

The other way in which Level III expands the use of INPUT statements is with the addition of #LEN. By adding this to INPUT (INPUT#LEN) you can put a time limit on responses to INPUT prompts. This will be a very helpful for education and game programming. For example, you could write a math drill program that gives students ten seconds to work out each problem before going on to the next problem.

String manipulation power is increased in Level III BASIC with the addition of the INSTR function and the expanded use of MID\$. INSTR, which is also found in Disk BASIC, allows you to search a string for a specified substring. For example,

you could search a list of telephone numbers for numbers that have the 212 area code. MID\$ can be used on the left-side of the equation in Level III as well as the right-side of the equation. This feature, too, is found in Disk BASIC.

Level III BASIC even corrects some of the problems with Level II BASIC. It eliminates keyboard bounce and provides more reliable cassette tape loading. Two new commands, LOAD and SAVE replace the Level II CLOAD and CSAVE commands. They permit cassette tape

One of the concepts behind Level III BASIC is that it has enough features so that there is something for just about everyone.

interfacing without the usual "volume sensitivity" of the tape recorder.

As with TRS-80 Disk BASIC, Level III BASIC spells out the error messages instead of displaying two letter abbreviations. Instead of getting the error code NF, you get the error message, NEXT WITHOUT FOR. This greatly simplifies debugging because you don't waste time referring to the error code chart.

With a TRS-80 Expansion Interface, you can make use of the Level III string function, TIMES\$. It can be used like any other string function to add a built-in digital clock and calendar to your computer.

Upon loading, TIMES\$ is set to all zeroes (0), and it begins working automatically. You can easily set it to the correct time and date, then use it to time various program activities, or to perform calculations where time and date are essential.

With the optional RS-232 port, then you can use the new statement, PRINT#-3. This allows you to output information through the RS-232 port to control line printers, LED's, stepping motors, lights, or whatever.

For those sophisticated enough to be using machine language subroutines in their programs, Level III simplifies exit to user subroutines with automatic conversion of Hex and Octal Constants. It also allows 10 user defined routines, as compared to one in Level II BASIC.

Summary

In addition to the features of Level III BASIC, many people will appreciate the way in which it has been

When you set your standards high,



Pick A Daisy.

Diablo invented the Daisy Wheel. Which is why today, more people pick one of over 100 different Diablo Daisy Wheels when they want print quality at its finest.

So, the next time you want to set your standards high, pick our daisy and you're sure to look your best.

Diablo Systems XEROX

Diablo® and Xerox are registered trademarks of XEROX CORPORATION.

Level III, con't...

documented. The instruction booklet is based on extensive documentation written by Microsoft's Andrea Lewis. It was written for people who have some programming experience, but the user doesn't have to be an expert to understand it. Examples and sample programs are abundant.

One apparent result of the care that has gone into Level III is that on the whole it is a more professional

Level III BASIC even corrects some of the problems with Level II BASIC. It eliminates keyboard bounce and provides more reliable cassette tape loading.

package than Radio Shack's Level II BASIC. It's hopeful that this effort pays off and that software to follow will equal or exceed GRT's standards.

Now for some of the negative observations promised earlier. To begin with, Level III wouldn't be necessary if it weren't for some apparent shortcomings of Level II BASIC, which was also written by Microsoft. The problems with loading and saving programs on cassette tape (CLOAD and CSAVE) are particularly irritating. Why didn't Microsoft and Radio Shack see this problem and correct it? It seems that too many companies are always in too big a hurry to get product out. Level II BASIC probably should not have been released in the first place with these problems.

While Level III BASIC can be stored on disk as a file, it can't be used with Disk BASIC. It's hard to imagine that many Disk users will want to give up the use of file commands. Actually, Level III probably shouldn't be marketed to Disk BASIC users at all. Instead, a disk version of Level III with the neat graphics statements and other unique features should be planned for the near future.

One more concern is the 5.2K RAM memory that Level III requires. Granted, this isn't very much when you consider all the new features, but a TRS-80 without an Expansion Interface can only have a maximum of 16K RAM. Many TRS-80 programs written in Level II BASIC, including those marketed by GRT, take more than 12K RAM. You won't be able to take advantage of LEVEL III's new LOAD command for these programs.

As I said, you have to weigh the advantages of Level III against the cost. The decision is yours. □

Example of Level III BASIC Graphics Program*

The following program is a Level III graphics program that uses the three new graphic statements, LINE, GET and PUT. It generates the image of a rocket ship and makes it move up the screen. It was written in graphics mode.

Program	Explanation
10 'ROCKET IN GRAPHICS MODE	Remark
20 CLS	Clear Screen
30 LINE(3,1)-(3,2), SET	
40 LINE(2,3)-(4,4), SET, BF	Draws Rocket
50 LINE(1,4)-(1,5), SET	
60 LINE(5,4)-(5,5), SET	
70 DIM A%(2)	Dimension Array
80 GET = (1,1)-(5,6), G,A%	GETting Array
90 CLS	Clear Screen
100 FOR Y = 42 TO 1 STEP -1	So rocket will start at bottom of screen and move up
110 PUT (1,Y)-(5,Y+5), SET, A%	PUTting array on bottom of screen
120 NEXT Y	Creates movement
130 CLS	Clears screen
140 GOTO 100	Let's do it again, and again, and again...

*This example is from the Level III Instruction Booklet.



"... We did a computer analysis on your price list and came up with a lot of blue smoke in the logic circuit..."

© Creative Computing

NOW... Exclusively Yours from ACS

TRS-80®-DOS 3.0

Disk Operating System by the Original Author

☐ DOS 3.0

EFFECTIVE SEPTEMBER 1

ONLY **\$49.95**

Check these DOS 3.0 features...
that go far beyond 2.1

NO KEY BOUNCE • UPWARDS COMPATIBLE FROM 2.1 • CHECK EOF
SEEK • RE-READ • RE-WRITE • LOC • VARIABLE LENGTH RECORDS
SKIP • DISK LOGGING OF MESSAGES • BOOT • CHAIN • WRITE EOF
PURGE • SET • RESET • ROUTE • RUN & LOAD FOR 1 DRIVE SYS.
XFER • FORMAT W/O ERASE • DIR FROM BASIC • PATCH • LINK
USER DEFINED KEYS • KEY AUTO REPEAT • UPPER AND LOWER
CASE DRIVER • SHIFT LOCK • RS-232-C DRIVERS
• PAUSE • USER DEVICE CONTROL BLOCKS
• MULTI PROTOCOL COMMUNICATIONS

HARDWARE FOR TRS-80®

- ☐ Pertec Disk Drives FD-200 \$375.00 ea.
These are 40-track Drives that are completely compatible with the TRS-80 and Radio Shack Drives. 3.0 DOS included. Will allow Turning Diskette over and Write on other side.
- ☐ 4-Drive Cable for Pertec Drives \$35.00
- ☐ DECwriter III, 132 Character \$2500.00
110 to 9600 baud EIA tractor feed keyboard printer. This is truly the nicest printer available. (30 day delivery)
- ☐ 701 Centronics TRACTOR FEED Bidirectional Printer \$1500.00
2½ times as fast as the Radio Shack 779 Printer, has full size 132 Char. Carriage Bell tone. Complete with Cable plug in and use. Shipped Freight COD.
- ☐ 200 ns 16K Dynamic Memory Chips for Keyboard or Expansion Interface, Lifetime Guarantee, complete \$110.00
Lifetime Guarantee. Complete with Instructions and Jumper Blocks.
- ☐ 10 Key Numerical Keypad Kit \$79.95
- ☐ TRS-80® Level II - 16k \$750.00
 - ☐ Expansion Interface \$275.00
 - ☐ RS-232-C Interface \$ 89.00

ORDER NOW AND SAVE

Just list the items you want
and mail this convenient coupon.

SOFTWARE BY ACS

- ☐ Monitor No. 3 \$29.95
Complete Machine Language Monitor for TRS-80 Features: Find, EDIT, Relocate, Symbolic Dump to Tape, etc.
- ☐ Monitor No. 4 \$49.95
All of the commands that reside in Monitor No. 3, plus: RS-232 I/O, Disk Program I/O, Symbolic Dump to Disk for Loading into Disk Editor/ASM., Track & Sec I/O for modification.
- ☐ PCLEND \$15.95
Will Patch ASCII files of Basic Programs or text or DATA FILES so that they may be loaded into the Disk Version of the Electric Pencil for Editing purposes comes on Cassette that will automatically create a Disk file of PCLEND.
- ☐ MAKE TAPE AND MAKE DISK for Cassette Dealers \$69.95
These are two programs that will allow you to take any type of Program from Disk and store it on tape for mailing purposes. When the user receives the program in the mail on cassette, it is loaded into the computer which will automatically make a Disk file of the program.
- ☐ CPM & C BASIC for the TRS-80®
CP/M Includes: MOVCPM, STAT, PIP, Dump, DDT, ASM (6080), ED, plus 6 user manuals, \$150.00
C Basic-2 Includes: XREF2, CBAS2, and manuals.
- ☐ C BASIC 2 \$99.95
- ☐ G2 LEVEL III BASIC for TRS-80® Special \$39.95
- ☐ TELCOM - Telecommunications for the TRS-80® \$29.95
Telecommunications for the TRS-80® allows one TRS-80® to communicate with another through the RS-232-C over the phone line.



Orders received by 6:00 p.m. shipped next day on Master Charge, Visa, Certified Check or Money Order. Personal Checks require 14 days to clear. No C.O.D. Collect calls not accepted. All Hardware warranted for 90 days except Radio Shack equipment which is warranted through Radio Shack. Software guaranteed for replacement only. Prices subject to change without notice.

**AUTOMATED
COMPUTER
SOFTWARE SERVICE**
(615) 244-2798

Division of
Computer World INC.
625 Main Street • Nashville, TN 37206

Send Check or Money Order payable to -

SOFTWARE • P.O. Box 60097 • Nashville, TN 37206

Quan.	Description	Unit Price	Total

HANDLING CHARGE \$1.50
TENN. RES. ADD 6% SALES TAX **TOTAL**

- ☐ Check
- ☐ Money Order
- ☐ MasterCard
- ☐ Visa
- Card No. _____
- Exp. Date _____

Name _____
Address _____
City _____ State _____ Zip _____

CIRCLE 102 ON READER SERVICE CARD



PET Software From Creative Software

Randy Heuer

Creative Software is one of several companies currently producing software for the Commodore PET. Like most companies producing software for the popular microcomputers today, their selection consists primarily of games and a few personal applications packages.

Each cassette from Creative Software comes in a hard plastic box packaged in a 5" x 11" plastic ziplock bag. Some of the packages contain a two page instruction sheet, however, others contain just the instructions contained in the programs themselves. We feel it would be desirable to have some written documentation for every program.

Some of the software requires the use of the dual joystick interface available from Creative Software. This little module plugs into the PET's parallel user port and costs \$45, less the joysticks. You may use the joysticks from an Atari video game or purchase them from Creative Software for \$12.50 each. These prices may seem a bit steep, but the joysticks do add much to the games. The interface module comes with two programs and instructions for using the joysticks in your own programs.

Trap

The game TRAP will remind most people of the arcade game "Blockade." Two players can compete against each other or one player can play against the PET.

You must have the joystick interface available from Creative Software in order to use this program. Each player controls a moving blip that leaves a trail behind. The object of the game is to force your opponent to run into either the edge of the board or the trail of either player. You may direct your blip up, down, left or right by moving the handle of the joystick in the appropriate direction.

A good player will be able to beat the computer most of the time although kids will probably enjoy competing against the PET.

Breakout

Breakout is one of the most popular arcade games. This machine language version for the PET is a fast moving and enjoyable version.

Only one player can play the game at a time although players can take turns trying to accumulate the highest number of points. You may use either the keyboard or joysticks to control the paddle located at the bottom of the screen. The paddle is used to bounce a ball up to the six rows of bricks at the top of the screen. The object of the game is to try to remove all the bricks from the wall. Each time you hit one of the bricks with the ball, that brick will be removed and you will receive a certain number of points, depending upon its row.

This is a very addictive game which both children and adults will enjoy. (\$10)

Seawolf

Obviously inspired from another popular video arcade game, Seawolf puts you in the role of a submarine commander. In this real-time game, you must sink as many enemy ships as possible in the time allotted. Three different types of enemy ships move back and forth across the top of the screen. You may move your submarine across the bottom of the screen and fire torpedoes by using either the PET keyboard or a joystick.

This machine-language version is extremely fast moving, perhaps a bit too fast for some as the ships and torpedoes go flying by. The game also features floating mines (that sink when hit) which block your torpedoes and ships. This is a good exercise for developing hand-eye coordination. (\$10)

Life

Life is the classic computer simulation of successive generations of a population. This PET version uses a

machine language routine to rapidly change generations in about one second.

Special features in the program allow the user to change and create new patterns anytime during a run. The program also incorporates some extensions into the classic routine by allowing for fixed "posts" and "holes." These features remain constant throughout a run.

Most Life "fans" will find this version very interesting with its rapid pattern changes and editing features. The only small complaint we would raise is that due to the small size of the PET's screen (40 x 40 characters), complex patterns often wrap around on themselves. Other than this, the program is excellent. (\$20)


Household Finance Package

This package consists of two programs designed to record and analyze financial patterns in the home.

The programs make use of cassette data files to store monthly records of income and expenses. You create one cassette file for each month by using the first program. Each expense is classified in one of 16 different categories such as taxes, food, clothing, etc. For each expense or payment, you enter the date of payment, category code, amount, method of payment and a brief description. This information is stored on cassette for use by the second program.

The financial analysis program uses the data files created by the first program to provide an analysis of your income and expenses. First a summary of your monthly expenses by category is displayed. Next, a very nice graphic chart of your expenses can be displayed. Another month's data tape can then be entered in order to obtain a summary over several months. (\$15)

For more information, write Creative Software, P.O. Box 4030, Mountain View, CA 94040. ☐

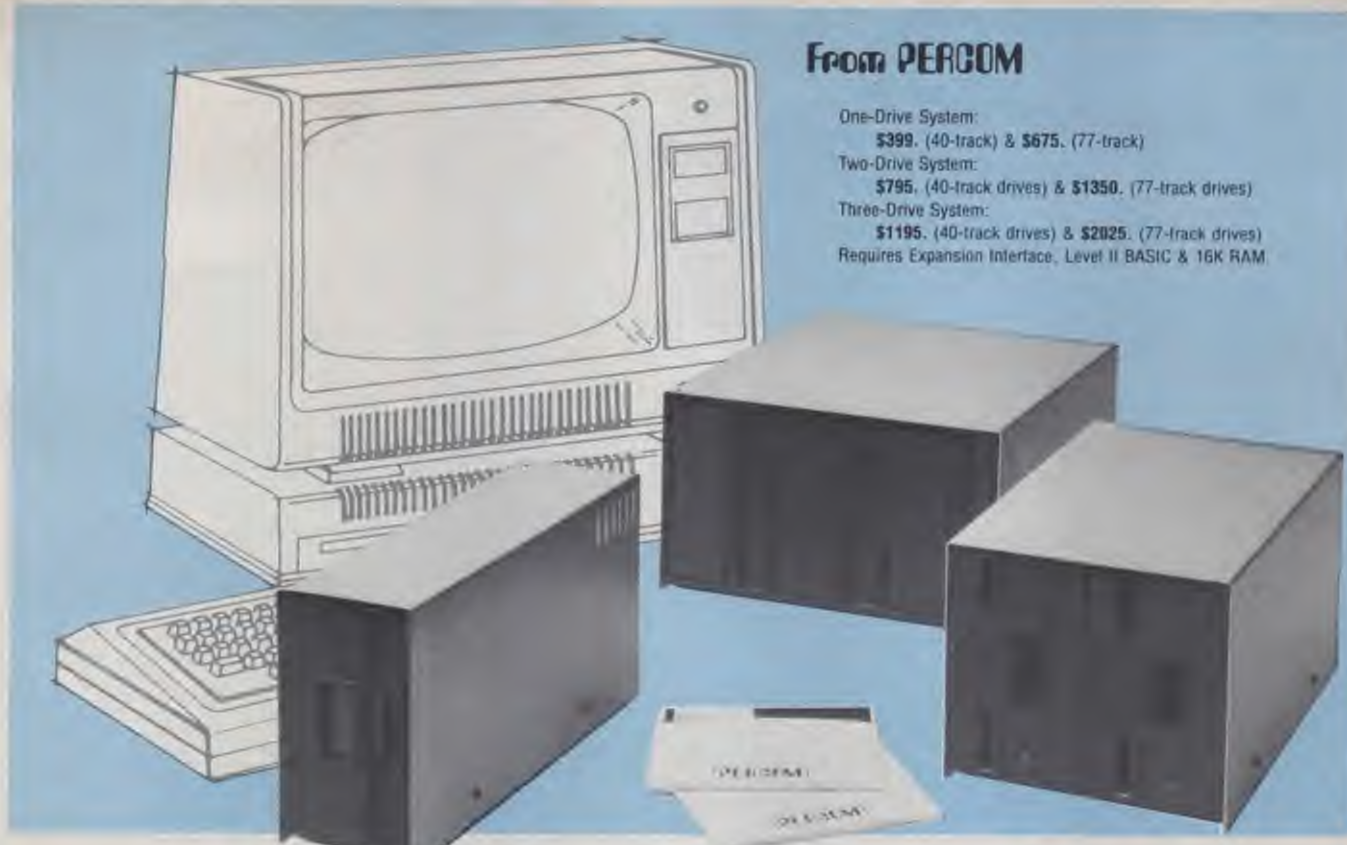

From PERCOM

One-Drive System:

\$399. (40-track) & **\$675.** (77-track)

Two-Drive System:

\$795. (40-track drives) & **\$1350.** (77-track drives)

Three-Drive System:

\$1195. (40-track drives) & **\$2025.** (77-track drives)

Requires Expansion Interface, Level II BASIC & 16K RAM

Low Cost Add-On Storage for Your TRS-80*. In the Size You Want.

When you're ready for add-on disk storage, we're ready for you.
Ready with six mini-disk storage systems — 102K bytes to 591K bytes of
additional *on-line* storage for your TRS-80*.

- Choose either 40-track TFD-100™ drives or 77-track TFD-200™ drives.
- One-, two- and three-drive systems immediately available.
- Systems include Percom PATCH PAK #1™, on disk, at no extra charge. PATCH PAK #1™ de-glitches and upgrades TRSDOS* for 40- and 77-track operation.
- TFD-100™ drives accommodate "flippy disks." Store 205K bytes per mini-disk.
- Low prices. A single-drive TFD-100™ costs just \$399. Price includes PATCH PAK #1™ disk.
- Enclosures are finished in system-compatible "Tandy-silver" enamel.

Whether you need a single, 40-track TFD-100™ add-on or a three-drive add-on with 77-track TFD-200™s, you get more data storage for less money from Percom.

Our TFD-100™ drive, for example, lets you store 102.4K bytes of data on one side of a disk — compared to 80K bytes on a TRS-80* mini-disk drive — and 102.4K bytes on the other side, too. Something you can't do with a TRS-80* drive. That's almost 205K bytes per mini-disk.

And the TFD-200™ drives provide 197K bytes of on-line storage per drive

— 197K, 394K and 591K bytes for one-, two and three-drive systems.

PATCH PAK #1™, our upgrade program for your TRSDOS*, not only extends TRSDOS* to accommodate 40- and 77-track drives, it enhances TRSDOS* in other ways as well. PATCH PAK #1™ is supplied with each drive system at no additional charge.

The reason you get more for less from Percom is simple. Peripherals are not a sideline at Percom. Selling disk systems and other peripherals is our main business — the reason you get more engineering, more reliability and more back up support for less money.

In the Product Development Queue . . . a printer interface for using your TRS-80* with any serial printer, and . . . the Electric Crayon™ to map your computer memory onto your color TV screen — for games, animated shows, business displays, graphs, etc. Coming PDQ!

™ TFD-100, TFD-200, PATCH PAK and Electric Crayon are trademarks of PERCOM DATA COMPANY.

*TRS-80 and TRSDOS are trademarks of Tandy Corporation and Radio Shack which have no relationship to PERCOM DATA COMPANY.

PERCOM

PERCOM DATA COMPANY, INC.
211 N. KIRBY • GARLAND, TX. • 75042

To order add-on mini-disk storage for your TRS-80*, or request additional literature, call Percom's toll-free number: 1-800-527-1592. For detailed Technical information call (214) 272-3421.

Orders may be paid by check or money order, or charged to Visa or Master Charge credit accounts. Texas residents must add 5% sales tax.

Percom 'peripherals for personal computing'

The Battle Of The Word Processors

Part II

Rod Hallen

In Part 1 of this article we discussed text editors and decided that they are used to create text files. These files can contain just about any kind of written information. This includes letters, articles, book manuscripts, assembly language source listings and even BASIC listings. I use word processing for business letters so I can study and revise them before they go to the printer.

Of course, all of my magazine articles pass through my word processor. In fact, I believe that this has improved my writing. Whereas in the past, when everything had to be hand typed, I might do three revisions before I got tired and accepted what I had; I now do as many as 10 revisions because the whole process is so much easier and faster. The final copy sent off to the editors is also more professional looking because it does not contain any erasures or strikeouts.

In part 1, we created and stored a text file on disk. In its present form, it isn't of much use to us. We can read it on the screen and do another revision if necessary, but hard copy is the real reason we sat down at the computer in the first place. Using the CP/M TYPE command we can list the file and the printer will make a copy that contains all of the information the file contains.

However, there is a better way to put the file on paper. A word processor will format the text so that it is more attractive and easier to read. It will break the text into pages, number and title the pages, indent and space and justify. All of these features are especially useful if you want to photocopy the printout and assemble the pages into a book.

The word processors that we'll discuss are capable of doing all of these things and much more. Again, this will be a comparison of Digital Research's TEX and TSC's PR with Michael Shroyer's Electric Pencil used as a benchmark (see Table 1 for prices and ordering info).

Rod Hallen, Road Runner Ranch, P.O. Box 73, Tombstone, AZ 85638.

Text Editing System - ED
Comes as a component of the CP/M DOS
Word Processing System - TEX \$75

From: Digital Research
P. O. Box 579
Pacific Grove, CA 93950

Text Editing System - EDIT \$40
Word Processing System - PR \$50

From: Technical Systems Consultants
P. O. Box 2574
W. Lafayette, IN 47906

Text and Word Processing System
- Electric Pencil II \$250

From: Michael Shroyer Software
1253 Vista Superba Drive
Glendale, CA 91205

Table 1. This is a source and price list. There are a great many versions of each of these programs available. Contact the software houses listed for more information. TSC also has MC6800 versions for sale.

TEX From Digital Research

The first thing I noticed about Digital Research's TEX is the manual. I think it contains some of the best software documentation that I've seen. If their CP/M manuals had been written as well, I would have been able to get into CP/M much quicker than I did. I especially like the way the various print values are described. Each has a page of its own. Example inputs and outputs are given so you can see the result of using each command. Table 2 is a summary of TEX commands.

Adjust Margins	Begin Page
Break	Center
Conditional Page	Double Space
Heading	Heading Margin
Ignore	Indent
Literal	Line Length
Line Spacing	Margin, Bottom
Margin, Top	No Adjustment
Omit Page Numbers	Page Advance
Page Length	Page Number
Page Offset	Paragraph
Quit Indentation	Space n Lines
Single Space	Temporary Indent

Table 2. This is a list of the commands available to the TEX user. They are entered into the text file as required and TEX uses them to format its output file or hardcopy.

Another feature of the manual that I like is an overview of CP/M. This is for those TEX users who don't use CP/M often enough to become familiar with it. Just enough information is given to enable you to use TEX effectively without having to become a CP/M expert.

TEX uses a text file generated by ED (or EDIT) as its input. TEX is not an interactive program. Once you tell it which file to work on, it will do its job and then exit without any further attention from the operator. The only options are specifying where the output from TEX is to go (Console, Disk, Printer, or nowhere), where error messages are to go (Console or printer) and whether you are using continuous fanfold paper or single sheets. In the latter case it will stop after each page to allow you time to change sheets.

The first thing I noticed about Digital Research's TEX is the manual. I think it contains some of the best software documentation that I've seen.

When TEX is entered, it assumes certain default print values. These are set up for a standard 8½ x 11 inch page and will be entirely adequate in many cases to produce the type of printed output you desire. However, each of these print values such as margin, line length, page numbering, line spacing and many other variables can be changed at will.

This is accomplished by entering TEX print values into the file while it is being created. For instance, suppose that in the middle of the text you want to change the left margin from 8 spaces to 12 spaces and the line length from 64 characters to 56 characters. You'd enter .PO + 4 LL -8 at the point where the change was desired (a command or string of commands must be preceded by a period). You can change the print values as

Build your own microcomputer as you learn computer technology at home.

New from NRI The Most Complete and Up-to-date Home Study Course Ever Offered

As the microprocessor revolutionizes the computer world and microcomputers appear almost everywhere, NRI brings you a new, convenient, and effective way to keep up with this expanding technology. It's NRI's Computer Technology Course, created and designed exclusively for learning at home in your spare time.

Featuring NRI's Exclusive Dual Language Microcomputer

NRI goes beyond book learning to give you practical, "hands-on" experience in designing circuitry, interfacing components, programming, and troubleshooting. As you learn, you actually assemble NRI's designed-for-learning microcomputer, incorporating the latest advances in the state of the art. It looks and operates like the finest of its kind, actually does more than many commercial units. But NRI engineers have designed components and planned assembly so it demonstrates important principles, gives you working experience in detecting and correcting problems. And it's yours to keep, put to work in your own home or business.

You also build and keep your own test instruments, including a transistorized volt-ohm meter and CMOS digital frequency counter. And NRI's Discovery Lab® broadens your horizons with specialized experiments and theory demonstrations.

The Proven Way to Learn at Home

You don't have to worry with travel, classes, or time lost from work when you learn the NRI way. As they have for more than 60



years of teaching technical subjects, NRI brings the material to you. You study in your spare time, at your convenience, using "bite-size" lessons that program material into logical segments for easier assimilation. You perform experiments and build equipment using kits we supply. And your personal NRI instructor is always available for consultation should you have questions or problems. Over a million students have already shown the effectiveness of NRI training.

Choice of Courses

Several courses are available, depending

upon your needs and background. NRI's Master Course in Computer Technology starts with the fundamentals, explores basic electronics and digital theory, the total computer world, and the microcomputer. The Advanced Course, for students already versed in electronics and general computers, concentrates on the microprocessor and microcomputer. In both courses, you build all instruments and your own computer.

Send for Free Catalog... No Salesman Will Call

Get the details on these exciting new courses in NRI's free, 100-page catalog. Shows all kits and equipment, lesson outlines, and full information, including facts on other electronics courses. Mail the coupon today and we'll rush your catalog. No salesman will ever call. Keep up with the latest technology as you learn on your own computer. If coupon has been removed, write to NRI Schools, Computer Department, 3939 Wisconsin Ave., Washington, D.C. 20016.



NRI Schools
McGraw-Hill Continuing
Education Center
3939 Wisconsin Avenue
Washington, D.C. 20016
NO SALESMAN WILL CALL
Please check for one free catalog only

- ☐ Computer Electronics Including Microcomputers
- ☐ TV/Audio/Video Systems Servicing
- ☐ Complete Communications Electronics with CB • FCC Licenses • Aircraft, Mobile, Marine Electronics
- ☐ CB Specialists Course
- ☐ Amateur Radio • Basic and Advanced



- ☐ Digital Electronics • Electronic Technology • Basic Electronics
- ☐ Small Engine Repair
- ☐ Electrical Appliance Servicing
- ☐ Automotive Mechanics
- ☐ Auto Air Conditioning
- ☐ Air Conditioning, Refrigeration, & Heating Including Solar Technology

All career courses approved under GI Bill.
☐ Check for details.

Name _____ (Please Print) Age _____

Street _____

City/State/Zip _____

Accredited by the Accrediting Commission of the National Home Study Council

175-119

Word Processors, con't...

many times as you like during the course of creating a text file.

Print values can be temporarily changed to leave space on a page for a picture or drawing and then changed back to the previous settings. It is possible to format the output in an almost infinite variety of ways. The final result is completely in your hands.

There are also many other print values that can be invoked. Page headings can be specified, the sequence of page numbers can be changed or numbers eliminated entirely, paragraph indenting used, right margin justification used or not, a new page started and titles can be centered.

As with EDIT, the assembly language source listing for PR, all 99 pages of it, are included in the manual.

One interesting and useful feature is the Conditional Page command. Many times a new paragraph or text section will be titled and when it is printed the title will fall at or near the bottom of a page with room below it

for little or no text. The text would then continue on the next page. The Conditional Page command allows you to specify how many lines must remain for the new paragraph or section to begin with, otherwise an eject to the next page will take place before it is started.

The manual finishes up with a series of appendices which summarize the commands and default values, run-time parameters, error messages, and provides examples of various paging options. All in all, a very good piece of software.

PR From Technical Systems Consultants

I won't go into the features that TEX and TSC's PR have in common; just assume that everything I've told you about TEX applies to PR as well unless otherwise specified. PR has many other outstanding features and I guess you could consider it a deluxe version of TEX. Since it sells for 2/3 as much as TEX, it is obviously a better buy.

As with EDIT, the assembly language source listing for PR, all 99 pages of it, are included in the manual. This will help you software hackers who have to modify everything you get your hands on. Again, however, it would have been nice if

Append to Macro	Arabic Numbers
Set Trap	Set Auto Increment
Break	Center Lines
Close Data File	Change Trap Location
Capitals ON	Capital Roman Numerals
Divert and Append	Divert Text
Define Macro	Exit Processor
Fill Lines	Get Info from Term.
Set Item Character	IF True, DO
Indent	Justify
Left Margin	Right Margin
Title Length	Multiple Spaces
Next Block	No Capitals
No Fill	Next Item
No Justification	Need Lines
Number Register	No Space
Open Data File	Output Saved Lines
Eject to Next Page	Put String in Indent
Page Length	Page Number
Pass Text	Read Item
Remove Macro	Repeat File
Restore Spacing	Single Indent
Space Lines	Small Roman Numerals
Single Space	Stop
Suppress Blanks	Save Lines
Set Tabs	Set Tab Character
Tab Fill Character	Define Title
String to Term.	3 User-defined commands

Table 3. A list of the directives available to the PR user. These commands and those shown in Table 4 for TEX are only the beginning of the big picture. Most commands allow modifiers which increase their flexibility and power.

this had also been put on the system disk. It is also a very well-written manual.

When PR is first entered it will ask you the date, which can then be used in later text processing. Next, it will ask you whether you want output routed to printer or disk and, if you select disk, it will ask for a file name. It will also ask you if you want to echo the file to the CRT while it is being



For A Demonstration Or Further Information Contact Your Local Computer Store.

Exidy
inc.

#1

output. These are similar to the TEX run-time options handled in a slightly different manner.

Printing two columns per page is possible but you must roll the paper back to the beginning of the page for the second column because negative line feeds are not supported. You can preset a given number of nulls to be output after each carriage return to give your printer time to return to the left margin if necessary.

You can also select a specific block of pages to be printed. If you respond "10,16" to the question "Page Limits," the entire file will be processed, but only pages 10 through 16 will be printed. Another command allows you to pass a file from input to output exactly as it was written. The printed copy would then contain all commands and comments.

PR does not startup with many standard print values and the first few lines of every text file must contain the print values that you want implemented. From then on these values can be changed during text processing.

While text files intended for use by PR or TEX can be written with either ED or EDIT, files written for one word processor cannot be run on the other. This is true because the commands for each of the processors are

completely different although they may in the end accomplish the same thing.

PR supports many commands which are normally available only on much larger computers. The list is long and I won't be able to cover them all here in any detail but most of them are listed in Table 3. The command summary in the manual is four pages long. I went through the summary and added page numbers to all of the commands so they are easier to find.

The first command which struck my eye were those used to print page head, foot and number information. These can be at the top or bottom of the page and they are very flexible. The page heading, for instance, can be made up of one, two, or three parts. The first part will be left justified, the second part will be centered and the third part will be right justified.

Justification can be specified as left, left and right, or centered. A centering command also allows the centering of a stated number of lines.

The capitalization mode is very interesting. It is designed to be used on a terminal that is uppercase only. All characters are then sent to the printer as lowercase except those which are preceded by the "@" symbol. The "@" is used just like a

shift key and the "!" is used as a shift and lock key.

The macro capability of PR is outstanding and probably its best feature. Strings of commands can be identified by a two letter name which is then used in place of these commands whenever required. For example, a header macro could be devised that would provide special header formatting and then its name would be invoked whenever it was needed.

The macro capability of PR is outstanding and probably its best feature.

If you want a macro to be implemented at a certain line on every page, a trap is used. A trap identifies the desired line number and calls the specified macro each time that line number is reached. One benefit derived from using macros is the ease of changing them. If you decided to change the number of spaces after the header on each page, you'd change the space value in the macro instead of going through the text and changing each appearance.

At the end of the manual is a macro library. This contains many useful, and sometimes complicated

	EXIDY	TEXAS	ATARI	APPLE	COMPUCOLOR	COMMODORE	TANDY
*FEATURES	SORCERER	INSTRUMENTS	800	II	MOD III	PET	TRS-80
Price of Minimum Configuration	\$995	\$1150	\$999.99	\$1150	\$1495	\$795	\$599
Computer Type	Z80	9900	6502	6502	8080	6502	Z80
Maximum RAM in Unit	48K	16K	49.1K	48K	32K	8K	16K
ROM Supplied	12K	26K	16K	8K	17K	14K	4K
Display	B/W	Color	Color	Color	Color	B/W	B/W
CHAR/Line	64	32	40	40	64	40	64/32
Line/Screen	30	24	24	24	16/32	25	16
Graphic Resolution	512/240	192/256	380/192	280/192	128/128	320/200	128/48
Keyboard	79 Key Typewriter	40 Key Calculator	57 Key Typewriter	52 Key Typewriter	77 Key Typewriter	73 Key Calculator	53 Key Typewriter
Lower Case Standard	Yes	No	No	No	No	No	No
Numeric Keypad Standard	Yes	No	No	No	Yes	Yes	No
Programmable Characters Standard	128	No	No	No	No	No	No
I/O Electronics Included	Dual Cassette RS232 Communications 8 Bit Parallel	Joystick Sound	Joystick Serial Single Cassette	Single Cassette Joystick	Single Disk RS232 Communication	Single Cassette IEEE 488	Single Cassette
Expansion Bus	S-100	No	No	Yes	Yes	IEEE 488 Daisy Chain	Yes
Disk Available	630K Byte	No	92K Byte	116K Byte	51.2K Byte	125K Byte	45K Byte
System Software Available	ROM Basic ROM Assembler ROM Word Processor CPM EXT. Basic CPM Fortran CPM Cobol CPM APL CPM Pascal	ROM Basic	ROM Basic ROM Assembler	ROM Basic Disk Basic Pascal	Disk Basic	ROM Basic Disk Basic	ROM Basic Disk Basic Cassette Assembler

Prices and specifications available June 1979.

390 Java Ave. Sunnyvale CA. 94086 (408) 734-9410

Word Processors, con't...

macros. It is possible to set up the entire formatting for a book in macros and then just call each one as required during the processing of the text by embedding the name of the macro in the text.

Another extremely powerful feature of PR is the IF command. IF is used in a fashion very similar to the way in which it is implemented in BASIC. Printing a Book? IF can be used in a Macro to left justify the heading on even numbered pages and right justify it on odd numbered pages. That is a simple example; IF can test many conditions and then call one or more PR commands or macros.

When the value of any register, including the page number register, is printed out, it can be in Arabic, large Roman, or small Roman numerals.

Also reminding me of a BASIC program are the Number Registers which are similar to BASIC's variables. Some registers are system registers which keep track of various print values and parameters. The rest of the registers are user-definable and these can be used for any purpose desired. Once set the user-definable registers can be auto incremented in steps of any specified value. The IF command can test any register and then act accordingly. When the value of any register, including the page number register, is printed out, it can be in Arabic, large Roman, or small Roman numerals.

PR is the only word processor I have encountered that supports operator communications. It is possible to insert messages to the operator in the text file, which are printed on the screen and then the processor stops. It is restarted by hitting any letter on the keyboard.

One example of the usage of this feature would be in single sheet printing. PR prints one page, displays the message "Insert new sheet of paper in the printer" and stops. The operator complies and then restarts the processor. This would continue for each page. This could also be used in the double column printing mentioned earlier.

The processor can also get information from the operator. Each time the Get Info command (very similar to

BASIC's INPUT statement) is encountered, a message is printed on the screen and the processor waits for input. That input is inserted in the text at the point of the Get Info command. An example would be text which is a form letter with a Get Info command in place of the date, name and addresses. Using the repeat command the letter can be typed automatically a large number of times with the operator inputting the appropriate information for each letter.

A data file can also be set up much in the same manner as BASIC. This data file could contain names and address, telephone numbers, policy numbers, expiration dates, or any other desired information. It can be read one item at a time and the data obtained used in the form letter mentioned above. The possibilities are endless.

I have never come across a microcomputer word processor that made provisions for footnotes. PR handles these perfectly. If, during the creation of the text, you feel the need for a footnote, you enter the footnote following the reference to it and the footnote will be printed at the bottom of that page. If the footnote is too large to all fit on that page, it will be continued to the bottom of the next page.

And last, but by no means least, is a function called "Environmental Control." This allows you to set up two completely different page for-

mat and then change from one to the other at will. You could, for instance, format the left hand page margins differently than the right hand page margins all the way through a book to compensate for binding. Again, this is very flexible and under your complete control.

In the space available to me here it has been impossible to do more than touch on what I consider to be some of the best word processor features I have ever seen. PR is, without a doubt, the most powerful of the three word processors discussed, and I don't believe in using the word "powerful" carelessly.

I have never come across a microcomputer word processor that made provisions for footnotes. PR handles these perfectly.

Conclusions

All of these word processing systems will run within a 16K version of CP/M. This will limit the size of the text buffer somewhat but this is only critical with the Electric Pencil which requires that the entire text file reside in memory during editing and processing.


I mentioned earlier that Electric Pencil files were not compatible with ED, EDIT, or the CP/M assembler. I know of two conversion routines that will convert Pencil files to CP/M files and vice-versa. One is available from Shrayar Software and the other is featured on page 26 of the March 1979 issue of Dr. Dobb's Journal.

I am using the latter and it works very well on assembly language source listings. I've tried to convert text files but extra carriage returns seem to be getting into the text. I think this is caused by text lines which are longer than 80 characters. I plan to reassemble the routine with a larger line buffer and see if that solves the problem.

One improvement I would like to see made to the Pencil would be a choice of CP/M or Pencil format at the input/output level. This would eliminate the need for a separate conversion routine and would be much more convenient.

Table 4 is my opinion of the cost effectiveness of various combinations of editor and processor. I haven't included TEX in any of the combinations because PR is better and cheaper. ED - PR is the lowest

©Creative Computing

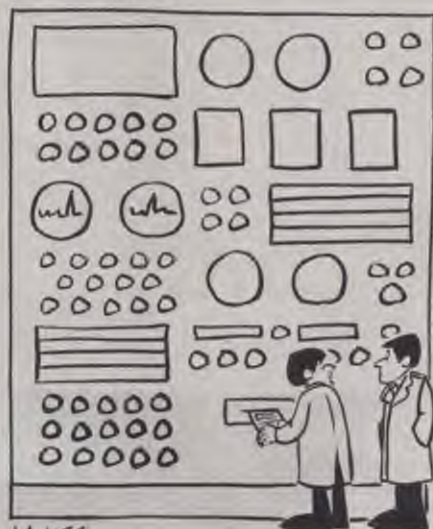

JAMES
ESTES

"It says, 'That's for me to know and you to find out'."

Word Processors, con't...

Low cost choice - ED + PR = \$92

Cost Effective - EDIT + PR = \$98

Disregard cost - Electric Pencil = \$250

Table 4. My choice of Text Editing - Word Processing systems. Costs on the Electric Pencil vary from under \$100 to over \$300 depending upon the version that you purchase. The most expensive versions support proportional spacing on a Diablo printer and these give true type-writer hardcopy. There is also a version of the Electric Pencil for the TRS-80.

priced combo and it should be satisfactory for most users. The EDIT - PR duo offers easier editing. In either case, PR offers very powerful word processing, more powerful than even the Electric Pencil provides.

Okay, if that is true, why did I use the Electric Pencil to edit and print the manuscript for this article? For the simple reason that Pencil has the easiest to use editor and I didn't need the power of PR. The Pencil is ideally suited to formatting magazine manuscripts. PR would probably be your choice if you process a lot of form letters or book manuscripts.

In either case, PR offers very powerful word processing, more powerful than even the Electric Pencil provides.

The severest limitation of the Electric Pencil is its requirement for a memory mapped video interface such as the VDM, VTI, or VIO. It will not work with a serial video terminal. I don't consider this to be a problem since I prefer memory mapped video. It is more difficult to program for, but much more versatile. I am using IMSAI's VIO which allows me 1920 (24 x 80) characters on the screen.

Text editors and word processors are very useful programs. Even if you only use them occasionally, they will improve your letter or manuscript writing. The businessman will find them indispensable. □

References

Word Processing - Creative Computing Jul-Aug 78 page 119

Electric Pencil - Creative Computing Feb 79 page 30

Electric Pencil - Kilobaud Microcomputing Mar 79 page 114

NOVEMBER 1979

Apple II is at The Computer Store



The Apple® II, today's most popular personal computer, is at The Computer Store. Along with the latest in Apple peripherals. Like the new Disk™ II floppy disk drive. Or, printer and communications interfaces. And, the latest in software including the new Apple/Dow Jones Stock Quote Reporter. The compact Apple II gives you 48K RAM memory with full color graphics and high resolution graphics. It's the most powerful computer in its price range.

At The Computer Store, we have more than ever before in microcomputers, memories, terminals and peripherals. All backed by a technical staff and a full service department. Stop in today, you'll find more than ever before at The Computer Store.

The Computer Store

820 Broadway, Santa Monica, California 90401 (213) 451-0713

The Original Name In Personal Computer Stores

Store Hours: Tues.-Fri., 10 am-8 pm, Saturday, 10 am-6 pm

Located two blocks north of the Santa Monica Freeway at the Lincoln Blvd. exit. Phone and mail orders invited. BankAmericard/Visa and Master Charge accepted.

CIRCLE 132 ON READER SERVICE CARD

Texas Instruments Home Computer TI-99/4



Speech Synthesizer	\$149.95
Video Graphics	19.95
Early Learning Fun	29.95
Beginning Grammar	29.95
Diagnostic	29.95
Home Financial	29.95
Football	29.95
Physical Fitness	29.95
Early Reading	29.95
Household Budget	44.95
Speech Editor	44.95
Investment Anal.	44.95
Personal Record kpg	44.95
Video Chess	69.95
Statistics	44.95
Tax/Investment-Record	69.95



Send \$1.00 for 12 page Color Brochure. (Refundable with your TI-99/4 order.)

Superior color, music, sound and graphics--and a powerful extended BASIC--all built in. Plus a unique, new Solid State Speech Synthesizer.



FACTORY DIRECT SALES
Dept. 304
1317 E. Colorado St.
Glendale, CA 91205
Phone: (213) 245-1417

ORDER TODAY

Retail Store Hours: Tues.-Fri. 10AM to 6PM
Sat. 9AM to 5PM. Closed Sunday & Monday.

20% deposit required on C.O.D. orders.

Check ☐ Money Order ☐ VISA ☐ Master Charge
CA residents add 6% sales tax. (No C.O.D. include Commercial U.S.A.)

SATISFACTION GUARANTEED OR YOUR MONEY BACK!

Copyright © 1979 Factory Direct Sales

53

CIRCLE 149 ON READER SERVICE CARD

You Don't Have To Be A Genius To Own The TI Home Computer



(The genius is built in)

**ORDER NOW
SAVE \$150**

Retail Price \$1150

Your Price

\$999⁹⁵

Price subject to change without notice. Refunds guaranteed.

- 26K ROM
- Up to 72K total memory capacity
- 16-color graphics capability
- Built-in equation calculator



A Home Control System

Paul Daro

One of the first applications of mini and microcomputers to gain widespread use was in commercial control systems. Computers were, and still are, quite useful for constantly monitoring and controlling electrical and mechanical systems. With recent developments in the microcomputer industry driving processor and peripheral costs down, we are now starting to see products that provide household computerized control. The Introl/X-10 system for the Apple Computer is one such product. It is a system for controlling an entire household of electrical appliances and devices.

In addition to performing its control functions, certain configurations of the Introl/X-10 system allow for another feature not commonly found in home systems - simultaneous execution of two different programs. The interrupt-driven Introl/X-10 performs its control function in the upper part of Apple memory, leaving room at the bottom for the user's own program (even BASIC).

The Introl X/10 system consists of a hardware/software package. The hardware provides the interface from the Apple to the outside world; the software enables the user to set up a real-time 'schedule' for controlling AC devices. The system is complete - no further programming is necessary to make it control a house, although there is BASIC interface that allows advanced users to set up more sophisticated applications than the software package provides.

The Hardware

There are 3 basic functional units that make up the Introl system. At one



end, a Mountain Hardware Introl/X-10 controller board provides an interface between Apple programs and the other 2 functional units; it sends out control commands via an ultrasonic transducer. These commands are received by the second unit, a BSR Command Console. The Command Console then transmits the commands over existing household AC power lines to the third functional unit, a BSR remote module. A single Command Console can control an unlimited number of remote modules, and each remote module controls one appliance (up to 1500 watts) or several lamps (up to 300 watts).

The Introl/X-10 circuit board can be mounted in any of the Apple II peripheral slots (except 0, of course). It has an on-board ROM program that controls the transmission of pulses to the BSR Command Console. The board is activated by the BASIC PR# command, and information is passed to the ROM program using conventional PRINT statements.

In addition to receiving Apple commands and sending them out to the remote modules, the Command Console also has a keyboard, enabling the user to send commands manually. The Command Console

and remote modules are sold by BSR, Ltd. as the System X-10, a centralized electrical control system. Mountain Hardware has added the Apple peripheral board, thus facilitating centralized computer control, and creating the Introl/X-10 system.

In order to fully understand the Introl/X-10 system, one should understand how commands are sent. On the side of each remote module is a "unit code" dial. This dial has 16 different positions, numbered 1 to 16. This dial identifies the remote module. Commands are issued from the Command Console either manually or using the Introl board. They are issued by first sending a unit code and then a function code - the unit code selects the electrical device, and the function code identifies the action to take place. Suppose you sent the sequence 6, ON. Then all electrical devices plugged into remote modules with the unit code dial set at 6 would be turned on. There are also function codes for turning devices off, making lights dimmer and brighter, and 2 global codes 'ALL LIGHTS ON' and 'ALL LIGHTS OFF,' which turn all lights on or all lights and appliances off regardless of the unit code dial setting.

This simple scheme provides for a lot of flexibility, as several different devices can be controlled together even though they are plugged into different remote modules - all you need do is dial up the same unit code for each and one command turns them all on. This could prove useful for controlling several outside lights located around the house, or perhaps to control room heaters in each bedroom. At the same time, the 16 different settings on the unit code dial provide the capability to independently control 16 different groups of

Paul Daro, 436 Trevethan Ave., Santa Cruz, CA. 95062.

Get Ready to Make Your Own Magic

Announcement I. The first eight Personal Programs® from Aladdin Automation are waiting for you now at your neighborhood computer retailer or direct from Aladdin.

Now you can get your full share of Aladdin Magic in every one of these Personal Programs®.

Math-Ter-Mind® A delightful, educational learning experience for your pre-school child. Watch the smile on your child's face as a correct answer makes the mathematician smile on the screen before you. A nursery song also serves as a reward for learning elementary addition and subtraction. With Aladdin's Math-Ter-Mind® your child's pathway to learning will be filled for both of you. Math-Ter-Mind® is the first release from the Aladdin Education® Series. (Nursery song currently available only on Apple II® program)

Lunar Lander In a controlled descent, you're just seconds away from your first landing on the cold, forbidding surface of the moon. As you navigate your delicate spacecraft downward to the safety of Moonbase, you must be ever watchful of the dangers rising to meet you with each passing moment: a fuel level fast approaching zero; deadly meteor showers that come from any direction; at any time, sheer rock cliffs and rough terrain; choosing the correct landing pattern and rate of descent. Aladdin's Lunar Lander. Your chance to reach out and touch the stars without leaving the safety and comfort of your own chair. The first release from the Aladdin Simulation® Series.

Craps All eyes in the casino are on you. The dice are in your hands. Lady Luck sits at your shoulder, whispering "Just one more time. Try your luck just one more time." You throw and watch the dice tumbling on the screen. With Aladdin's Craps you play against the computer, so it's awfully tough to win. But when you do, it's an experience you're likely never to forget. Craps. An exciting, heart-pounding Personal Program®. The first release from the Aladdin Las Vegas® Series.

Mastermind A challenging game of intrigue, centuries old, that will give you full chance to test your powers of logic, deduction and reason. And test them you will, as you try and solve the computer's puzzle, using clues as they're provided one-by-one. You control the degree of difficulty in this classic Personal Program® that offers one simple, yet all-consuming challenge: beat the Mastermind in a direct, one-on-one battle of wits. Aladdin's Mastermind. The first release from the Aladdin Old Favorites® Series.


Tic-Tac-Toe Five different levels of difficulty allow a person of any age or skill to take part in this relaxing, enjoyable game that can act as a learning tool, as well. Level I, for example, is suitable for children and is excellent also for teaching simple mathematics. The computer plays just about perfectly at Level V. Just about, that is, so go ahead and take your best shot. See if you can beat the computer in this traditional favorite of young and old alike. Tic-Tac-Toe. Another first release from the Aladdin Old Favorites® Series.

Jungle Island® Shipwrecked in a raging storm at sea, miraculously you survive only to find yourself stranded on a seemingly deserted jungle island. Without food, water or supplies of any kind, you begin to try and find your way to safety. The computer will be your eyes and ears as you explore your jungle island and all the mysteries and dangers that lie in wait for you. Jungle Island®. A captivating first release from the Aladdin Adventure® Series.

Stix® Aladdin's Stix® can be played with 2 to 5 piles of sticks and between 1 and 19 sticks in each pile. The object: to be the one to pick up the last stick. Sounds simple? Yes, but you're playing against the computer. Take heart, though, because you can control the degree of difficulty in this update of the ancient game of Nim. Stix®. Another first release from the Aladdin Old Favorites® Series.

Super Pro Football® Here's your chance to be more than just an armchair quarterback. With Aladdin's Super Pro Football® you can replay any Super Bowl game, from the first, between Green Bay and Oakland, to last year's classic victory by Pittsburgh over Dallas. For once you can turn back the clock and go for that one big play that made the difference between victory and defeat in pro football's biggest game of all Super Pro Football®. The first exciting release from the Aladdin Super Pro® Series.

Visit your neighborhood computer retailer or contact Aladdin direct to get your full share of the magic in Announcement I, the first eight Personal Programs® from Aladdin Automation.



Math-Ter-Mind®

Lunar Lander

Craps

Mastermind

Tic-Tac-Toe

Jungle Island®

Stix®

Super Pro Football®

Welcome to the All-New World of Aladdin. And Get Ready to Make Your Own Magic



ALADDIN AUTOMATION, INC.
ALADDIN COMPUTER CORP.

3420 Kenyon Street, Ste. 131, San Diego, CA 92110

Copyright 1978 by Aladdin Automation

Design and copy by Campbell Marsh Graphic Communications

CIRCLE 106 ON READER SERVICE CARD

Home Control, con't...

devices. This should be more than adequate for any home application, especially when one considers that each of the 16 groups can have an unlimited number of devices dialed to it.

The Software

So far only the rudiments of the system have been explained. The following is by far the most powerful part of the Mountain Hardware package - a software system for setting up and running a schedule of device ON/OFF/DIM commands.

With this software package, the user runs one program to set up a schedule that contains information for each device concerning what day and time the device is to be turned on, off, or dimmed. The he/she runs a second program which loads this schedule and then executes the commands at the appropriate times, allowing the individual to walk away and leave the computer running - control is fully automated from then on. This program also keeps an accumulated total of the time a given device group was turned on, and the total amount of power it consumed.

Setup Program

The schedule setup program is written in Applesoft BASIC, and needs at least 32K of RAM to run. The program uses menus to interact with the user. This makes the setup process a simple one, requiring limited prior knowledge of the setup process from the user.

Basically, there are two ways in which someone might want to set up a schedule for a given device. The first approach deals with events that occur on some sort of regular basis. For example, you want to turn the coffee pot on every weekday at 8:00, so your coffee is ready when you get up. Or, perhaps you want to turn your lawn sprinkler on for 2 hours every Tuesday and Friday. These types of events occur regularly every week, and you want them to occur at the specified time as long as your computer is running. Events like these have been termed regular events.

The other type of event specification is used in cases where you want something to happen only once. For instance during the weekend of the 14th, you are going away and want some lights to come on in the evening and go off in the morning. You want your regular schedule to run all the time, but in addition, on the 14th and 15th you want some additional events to occur. Events such as these are termed special events, and the system provides a means for entering these as well. Using the setup program, the user creates a separate schedule for each module group. (A module group is the set of all remote modules dialed to the same unit.)

Running the Setup Program

When the program is first run, the user chooses between creating a new schedule and updating an old one previously saved on disk. From this point, the setup process has two principle modes - the primary or executive mode and the edit mode. In the primary mode, the following options are available:

ASSIGN - With this option, the user makes up a name for each module group and inputs the total power consumption in watts for each group. The name and wattage is then assigned to the unit code number of the module group. Unused unit code numbers may be left unassigned, but a number must be assigned before a schedule may be created for it. This option exists primarily to help the user keep track of which module group contains which devices.

DISPLAY - This option displays for all 16 groups the module group numbers, names and wattages as they were entered.


SWAP SCHEDULES - This switches the schedules of two module groups. This function is used when you switch the unit code setting on a remote - you can do the swap function to reassign the schedule, instead of retyping it.

REMOVE SCHEDULE - This deletes the schedule for one entire module group.

SAVE SCHEDULE - This saves the entire schedule table for all 16 groups onto a user-specified disk file.

COMPUTE FILE SPACE - This tells how much room is left in the schedule table, giving the user an idea of how much more schedule information may be entered.

In the edit mode, individual group schedules are modified/updated; concurrently a schedule table in memory is updated. Upon entering the edit mode, the user specifies which module group he wishes to work on. He then has the option to add events to the schedule, remove events from the schedule and display the entire schedule for a given module group.

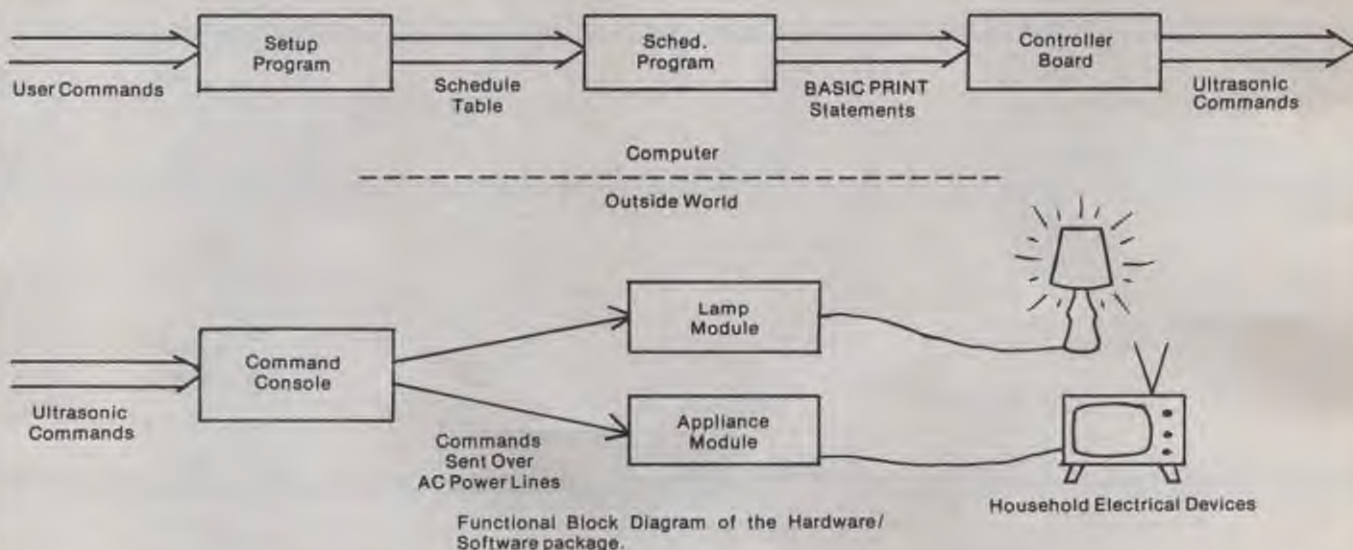

Special to Schools

50% off



COMPUTER RAGE GAME

50% discount on the purchase of 5 (or more) Games

**Discount
Price**

5 for \$22.38
Additional games
\$4.49 each

**Regular
price**

5 for \$44.75
\$8.95 each



Computer Rage has been hailed by educators as an outstanding game for teaching youngsters between 7 and 14 about the binary number system (the game uses 3 binary dice!), parts of a computer system and how a program is processed. In addition the game is sheer fun! Recommended by Instructor, The Arithmetic Teacher, The Science Teacher, Curriculum Product Review and others.

Computer Rage is based on a large-scale multiprocessing computer system. The objective is to move your three programs from input to output. Moves are determined by the roll of three binary dice representing bits in a computer. Hazards include priority interrupts, program bugs, decision symbols, power failures and restricted input and output channels. Notes are included for adapting game for school instruction. A perfect introductory tool to binary math and the seemingly-complex computer. [6Z]

Binary Dice. Now, the same dice used in **Computer Rage** can be purchased separately. Three binary dice (red, green and blue) in a zip-lock bag. \$1.25 postpaid. [3G]

To Order Send order with payment to Creative Computing P.O. Box 789-M, Morristown, NJ 07960. Visa, Master Charge or American Express are acceptable. For faster service, call in your bank card order toll free to: 800-631-8112 (in NJ call 201-540-0445)

Home Control, con't...

In adding events, there are different specifications for regular and special events. Regular events are specified by entering the day(s) on which it occurs, time at which it occurs and the desired function. Special events also have a date(s) associated with the event occurrence. In each case, the user is prompted for each parameter (day, time, etc.) separately.

The time parameter is specified by typing in the time much as it would be displayed on a digital clock. For example, "12:30A" would mean the 80th minute after midnight. Furthermore, there is a feature which allows specification of an event to occur randomly within a given interval. For example, if you went on vacation for a month and wanted lights turned on in the evening, you could use the random time function to have them come on at a random time between 6:00 and 8:00 every night. This helps to confuse anyone who might be staking out your house since the lights are not coming on in any recognizable pattern. This would be specified as "6:00P-8:00P."

The days parameter specifies on which days the events will happen. Days can be entered singly, separated by commas, or as a range of days, separated by a dash. For example, "MON,TUES,THU" would specify Monday, Tuesday and Thursday. On the other hand, "TUES-SAT" would be interpreted as Tuesday, Wednesday, Thursday, Friday and Saturday.

The function specification is one of three functions: ON, OFF, or DIM. ON and OFF are self-explanatory. The DIM function has a parameter associated with it; the DIM level. The DIM level is a number in the range 1 to 9, and specifies the final brightness of the light. The DIM function really means "turn on the lamp and then dim it to the given level." For example, if at 9:00 you wanted to turn a light on and dim it down to level 9 (most dim), the function would be "DIM 9." If at 9:10 you wanted to brighten it up by 3 DIM levels, the function would be "DIM 6."

Thus, a complete regular event specification consists of a time, days and a function entry. For example, to turn your heater on every morning at 8 and off at 10, two events would be entered:

8:00A SUN-SAT ON
10:00A SUN-SAT OFF

To make sure your TV was always turned off at night (for those who like

to fall asleep in front of it), you might enter:

1:00A SUN-SAT OFF

Special events are entered just like regular events, but in addition there is a date specification. The date specification consists of a month and dates within the month. For example, "FEB 10-20" means February 10th through February 20th. Or "FEB 10, 12, 14, 16, 25" means February 10th, 12th, etc. So if you want your lawn sprinkler to come on every Monday and Thursday while you are away in the last 2 weeks of July, the following special event entry would do it:

3:00P MON,THU JULY 14-28 ON
5:00P MON,THU JULY 14-28 OFF

By combining special and regular events, all possible needs are provided for. In the previous heater example, to keep the heater from going on while you are away, the following special event entry would do the trick:

8:00A MON-SUN JULY 14-28 OFF

In fact, even if the heater were to come on many times during a day, this one special event entry would take care of all the regular events, since a special event overrides the entire regular schedule for a given day.

The Scheduler Program

After the schedule has been created and saved, the schedule can be loaded and executed by the second program. This second program, the scheduler, performs the events as they were specified in the setup program. The first thing the scheduler does is load the table. It then turns off all connected devices and then deter-

mines the on/off/dim status of each device, bringing each device to its appropriate status. This initialization has interesting implications for Apple configurations that have the autoboot feature and a Mountain Hardware Apple Clock. Suppose you are away on vacation with your Apple at home minding the house. Suddenly, the power goes off for a few seconds, then returns. Ordinarily, the program would die and all your devices would stay in whatever state they were in until you came home. But, with an auto-boot program that executes the scheduler, this problem is alleviated. The scheduler loads in the table again, re-initializes all the devices and, presto, you are right back where you were.

In configurations without a Mountain Hardware Clock, the scheduler is interrupted once per second by the Introl/X-10 board. After the user types in the initial date and time, the scheduler keeps track of the time and date from there; so the scheduler program will work in minimally configured systems. However, the auto boot feature described above will not work because once power goes down, the scheduler loses track of its accumulated time. Then when the power comes back, there is no one around to re-initialize the time. Also, without a Mountain Hardware Apple Clock, the foreground/background feature is not available. Many foreground programs would do disk accesses and other functions that require interrupts to be turned off for periods of 1 second or more. When this happens, the scheduler would lose some of the 1-second interrupts and thus would start to lose time.

With the Mountain Hardware Apple Clock, the scheduler is capable of actually reading the date and time from the clock board. Even when interrupts are disabled for several seconds, no time is lost because the clock keeps its own accumulated time. This enables the scheduler program to run in the background, while a foreground BASIC or machine language program has primary control.

Since most of the time the scheduler is merely waiting for events to occur, there is not much of a delay in response time when running in foreground/background. However, if many events were all scheduled to happen at the same time, there might be a 10 or 20 second delay while the schedule was busy sending out commands to the devices. However, this situation would most likely occur once or twice a day if at all. Since the



"Oh, that reminds me. Our system also has a rather sophisticated file protect feature."

©Creative Computing

Home Control, con't...

schedule table resides in memory at scheduler run-time, the setup program could be run as a foreground program. Thus, you could update the schedule while the scheduler was executing it. This gives you the convenience of modifying the currently running schedule without having to stop and re-start everything.

Memory Considerations

The software package needs an Apple configured with a minimum of 32K of RAM. A 32K system will allow a schedule that contains up to 150 events, while a 48K system can handle up to 700 events. In foreground/background mode, a 32K setup will have room enough for a foreground program of up to 18K; in 48K systems the foreground programs can use 28K. In all cases, the DOS software is left intact.

Direct Interface

For the ambitious programmer, there is an optional direct interface to the ROM driver program. Thus the devices can be controlled directly from a BASIC program. The statement below activates the board:

PR#n, n = slot number of board

Once this has been done, PRINT statements are sent to the board, which interprets them and sends them out. For example, the statement below would turn on module group 1:

PRINT "1 ON"

Using this simple interface, the sophisticated user can set up a scheduling scheme. A direct interface program might be written to work in conjunction with the scheduler program to get a combination of straightforward scheduling and more complex timing functions for special devices.

Conclusion

Overall, the system is quite easy to install and run. The setup program is very user-oriented since its use doesn't require programming knowledge and the multi-tasking feature makes the Introl /X10 an extremely flexible control system. It is also inexpensive - \$279.00 buys the entire system including software, controller board, Command Console and three remote modules (additional remotes are \$16.00 each). \$279.00 for a practical system for computerized home control. □

NEW FROM MOUNTAIN HARDWARE. THE APPLE CLOCK.

New utility for your computer.

Now, there's a real time clock for the Apple II*: the Apple Clock from Mountain Hardware. It keeps time and date in 1mS increments for one year. On-board battery backup keeps the clock running in the event of power outage. Easy to use with BASIC using routines carried in on-board ROM. That means you can time events, put time and date on printouts, create games in which elapsed time is important...and many more. Mountain Hardware offers a complete line of peripheral products for many fine computers.



Available at your dealer's. Now.



Mountain Hardware, Inc.

300 Harvey West Blvd.
Santa Cruz, CA 95060 (408) 429-8600

*Apple II is a trademark of Apple Computer, Inc.

CIRCLE 172 ON READER SERVICE CARD

DUNJONQUEST™ Presents THE TEMPLE OF APSHAI

VISIT THE
VAULT
OF THE
DEAD!

The Vault of the Dead is but one of the many dark and fearsome mysteries within the ruined Temple of Apschai. The Temple of Apschai is your first adventure in the DUNJONQUEST™ series of fantasy role playing games.

DUNJONQUEST™ is a complete game system and The Temple of Apschai is a complete fantasy adventure game for you and your microcomputer.

OVER 200 ROOMS!
OVER 30 MONSTERS!
OVER 70 TREASURES!



- Take your favorite character - or let the computer create one for you!
- Let the Book of Lore guide you through a DUNJONQUEST™ within the Temple.
- Decide to fight the monsters or grab the treasure and run - but don't think too long - they'll come after you!

The Temple of Apschai for the TRS-80 (Level II, 16K) and PET (32K) microcomputers.

Ask your local dealer or send us your check for \$24.95 to:

Automated Simulations-Department R, P.O. Box 4232, Mountain View, CA 94040

California residents please add 6% sales tax.

CIRCLE 113 ON READER SERVICE CARD

Today We Control The House, Tomorrow...

Mark Garetz

We've all heard stories about how the home computer can be used for turning the sprinklers on and off, controlling the lights in the house, the temperature and humidity, turning on the coffee pot, feeding the dog and putting the cat out. Some of those, and other, "exotic" applications may be best left to our grandchildren. On the other hand, we're ready for many of them right now. And, I do mean right now. We're not going to have to tear the walls out of our houses and install wiring to every room, either. This article examines the programming and interfacing of a home computer to a commercially available remote-control unit for turning on lights and appliances throughout the house. By themselves these units are impressive in their operation, but the addition of the computer opens up a wider range of capabilities and options...not the least of which is an excellent security system.

System Components

The nucleus of the system is a series of products manufactured by BSR (the same folks that make the

Mark Garetz, MICRONICS, 1429 Maple St., San Mateo, CA 94402.

turntables) and marketed by Sears, Radio Shack and BSR themselves. Officially it's called the BSR System X10, but Sears calls it the Sears Home Control System and Radio Shack refers to it as Plug 'n Power.

The product line consists of five separate items. The first is the Command Console (everyone's terminology is a bit different, but I have the Sears system and it's the most readily available and also the cheapest, so I will use the Sears terminology). The Command Console is a small box that plugs into any standard outlet and has a calculator style keyboard on it with 16 numbers and 6 command keys. It works in conjunction with the other four products; the Lamp Module, the Appliance Module, the Wall Switch Module and the Cordless Controller. Four of the units are shown in the photo.

In brief, the system works like this. You plug a lamp into the Lamp Module, plug the Lamp Module into the wall and then you can turn the lamp on and off with the Command Console. The Command Console sends FM digitally coded signals over the house wiring to the Lamp Module.

The numeric keys on the Command Console are numbered 1 thru 16. These keys tell the Command

Console which device you want to control. Then there are 6 command keys that tell the Command Console what to do with the selected device. Also, there is a thumbwheel switch on the bottom called the House Code selector. It has the letters A through P on it, and is intended to keep a neighbor with a similar system from turning your lights on and off (the system works anywhere on the same power distribution transformer and there are usually several houses per transformer). Although that is the intended purpose of the switch, it can also be used to control up to 16 banks of 16 devices for a total of 256.

There are two different modules that plug into the wall which have things plugged into them. One is the Lamp Module and the other is the Appliance Module. They are both about the size of an AC adapter. The basic difference between the two modules is that the Lamp Module can be used only with incandescent lamps and the Appliance Module can be used with anything. The reason is that the Lamp Module outputs DC to the lamp, not AC, so it can also work as a lamp dimmer. The Appliance Module switches AC to heavier duty devices such as television sets and thus is not dimmable.



Tomorrow, con't...

There is also a wall switch module that looks like and replaces a standard wall switch. It is controlled by the switch on the unit or by the Command Console. It, like the Lamp Module, can only be used with incandescent lamps and is dimmable.

The last device in the family is the Cordless Controller. The Command Console has an ultrasonic receiver which receives signals from the Cordless Controller. The Controller has a keyboard identical to the one on the Command Console and by aiming it at the Command Console you can duplicate any of the functions of the console remotely. Its range is about thirty feet.

System Functions

So much for the hardware involved. Now let's examine the system commands and functions. First of all, there are on and off functions. By pressing the desired device key and then the on/off key you can control the device's on or off state.

I mentioned before that the lamp and wall switch modules could control the lamp's brightness. There are two command keys for this function. They are "bright" and "dim." If a lamp is on and you want to dim it to a lower level the dim key is pressed until the lamp reaches the desired brightness. To reverse the process

one simply presses the bright key.

Another command is "All Off." Pressing this key turns every module in the system off. Imagine you are lying in bed and are ready to turn in for the night. Of course, you have a command console at your bedside, so you hit the All Off key and all the lights and appliances in the house go off, even if you forgot to turn them off individually. Now suppose you're lying there in the dark and you hear a strange noise. This brings us to the last command key which is "All Lights On." Now when you hear this strange noise you simply hit the All Lights On key and all the lights in the house come on at once, which scares your cat to death (or the cat burglar). Notice that this key deals specifically with lights. Appliance modules will not respond to this command (it wouldn't do to have the blender, coffee pot and stereo come on to frighten the burglar).

This covers all the commands except for one important feature. Suppose you want to turn lights 1, 3, 7 and 16 on or off at the same time. Well you can just hit those number keys and then the command key and all those modules will respond at the same time. The Command Console will remember that you are working with that group (or single device for that matter) until you hit different number keys. In other words, once you have told it which device numbers

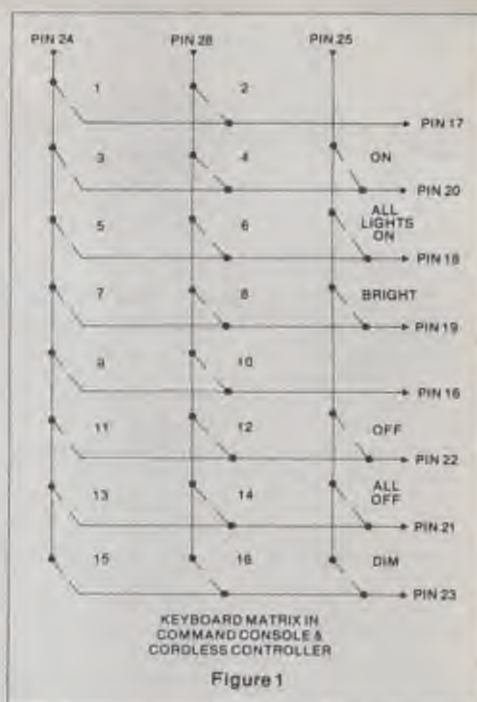


Figure 1

you want to control you can hit any sequence of command keys without having to hit the number keys again. (Have you guessed that there is a microprocessor in the Command Console?)

I'm sure you can see by now that it's a pretty powerful system by itself. But what if we could get our computers to press the keys for us? That


TRUTH TABLE

INPUTS				CHANNELS							
E	A ₂	A ₁	A ₀	Y ₀ -Z	Y ₁ -Z	Y ₂ -Z	Y ₃ -Z	Y ₄ -Z	Y ₅ -Z	Y ₆ -Z	Y ₇ -Z
L	L	L	L	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF
L	L	L	H	OFF	ON	OFF	OFF	OFF	OFF	OFF	OFF
L	L	H	L	OFF	OFF	ON	OFF	OFF	OFF	OFF	OFF
L	L	H	H	OFF	OFF	OFF	ON	OFF	OFF	OFF	OFF
L	H	L	L	OFF	OFF	OFF	OFF	ON	OFF	OFF	OFF
L	H	L	H	OFF	OFF	OFF	OFF	OFF	ON	OFF	OFF
L	H	H	L	OFF	OFF	OFF	OFF	OFF	OFF	ON	OFF
L	H	H	H	OFF	OFF	OFF	OFF	OFF	OFF	OFF	ON
H	X	X	X	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

L = LOW Level
H = HIGH Level
X = Don't Care


Figure 2

CONNECTION DIAGRAM
DIP (TOP VIEW)




NOTE:
The Flatpak version has the same pinouts (Connection Diagram as the Dual In-line Package).

LOGIC SYMBOL



V_{DD} = Pin 16
V_{SS} = Pin 8
V_{EE} = Pin 7

4051B FUNCTIONAL LOGIC DIAGRAM

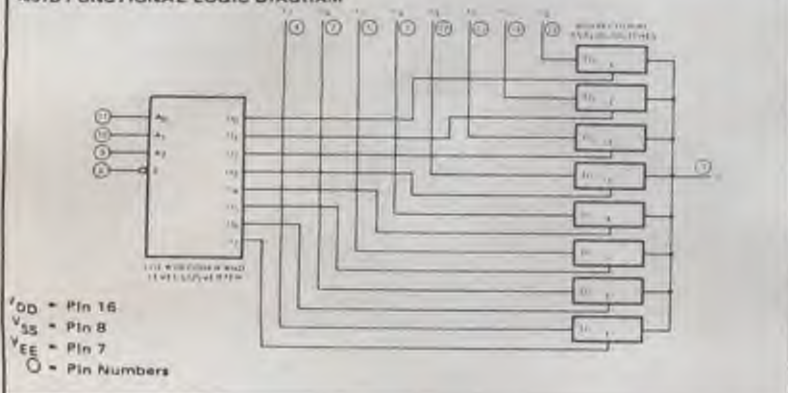

Tomorrow, con't...

is what we intend to accomplish. It takes three IC's, some ribbon cable, some resistors and a latched parallel output port from your computer. And, of course, the Home Control System.

The Interfacing Project

First, I should explain a bit about what's inside the Command Console. There is only one chip, a custom MOS processor made for BSR by General Instruments. As far as I can determine it is a completely custom chip, not a mask ROM version of one of GI's single chip micros. It runs on -20 volts. Yes, that's right - minus twenty volts. It's not TTL compatible which makes interfacing to it a real problem, but not unsolvable. The keyboard is arranged as a 3 x 8 matrix which the processor scans one column at a time (see Figure 1). The processor outputs -20 volts on the first column and then looks at the eight input lines to see if a key was pressed; the -20 volt signal gets connected to an input. If no key was pressed then the processor turns off the voltage to that output and turns on the second column and so on until you press a key.

Now our task is to simulate the key presses. A straightforward, but impractical, method would be to position a lot of solenoids over the keys and turn them on and off so that they actually pressed the keys. This will be discarded for obvious reasons.

Another interfacing problem is the 'hot' ground in the command console...whoops! (A hot ground is when the ground is connected to one side of the AC line.) Optoisolators come to mind, but twenty-two optoisolators is too messy. Besides, optoisolators don't fit into the scanned keyboard scheme too easily without a lot of other logic, and we still have the logic incompatibility which means level shifters and... like I said before, too messy.

Well, there are analog switches. That might be the answer. But analog switches that switch -20 volts are expensive, not too easy for the average hobbyist to come by and they only come four to a package so that's 6 packages which is still too messy and too expensive. Besides, there's still that hot ground problem to overcome.

Don't despair. Remember that hand-held remote control console? Well, it runs on a 9 volt battery. Now we can use a standard CMOS analog switch. No, wait. What about an analog multiplexer? Of course! My old friend the CD4051. A one-input-to-eight-output multiplexer.


The cat's out of the bag. It's done by using three CD4051's, one for each row. The multiplexer works by taking one input signal and switching it to one of the eight outputs. The desired output is selected by a three bit digital code on the select inputs, plus there is an inhibit line that turns off all the outputs. The select and inhibit inputs are TTL compatible (with pull-up resistors) and the analog signal path can handle 15V peak to peak. Now the -9 volts is no problem at all. A block diagram of the CD4051 is shown in Figure 2.

By electing to use the Cordless Controller to interface to the computer, instead of the Command Console, we have solved all our problems at once. Our logic compatibility problem is solved because the multiplexers can be controlled directly by any TTL signal. The complexity and other problems are solved because

the interface requires only three IC's. And the hot ground problem is avoided because there is no connection between the Cordless Controller and the Command Console - they're sonically coupled (a new wrinkle in the isolation field).

The Nuts and Bolts

Let's get to the nitty gritty of how to construct this project. First, you need a Home Control System consisting of a Command Console, a Cordless Controller and any number of lamp or appliance modules. Be sure you get the type of command console that responds to the ultrasonic signals transmitted by the cordless controller. Radio Shack is not marketing the Cordless Controller so it is not clear if their version of the Command Console will respond to the ultrasonic signals or not.

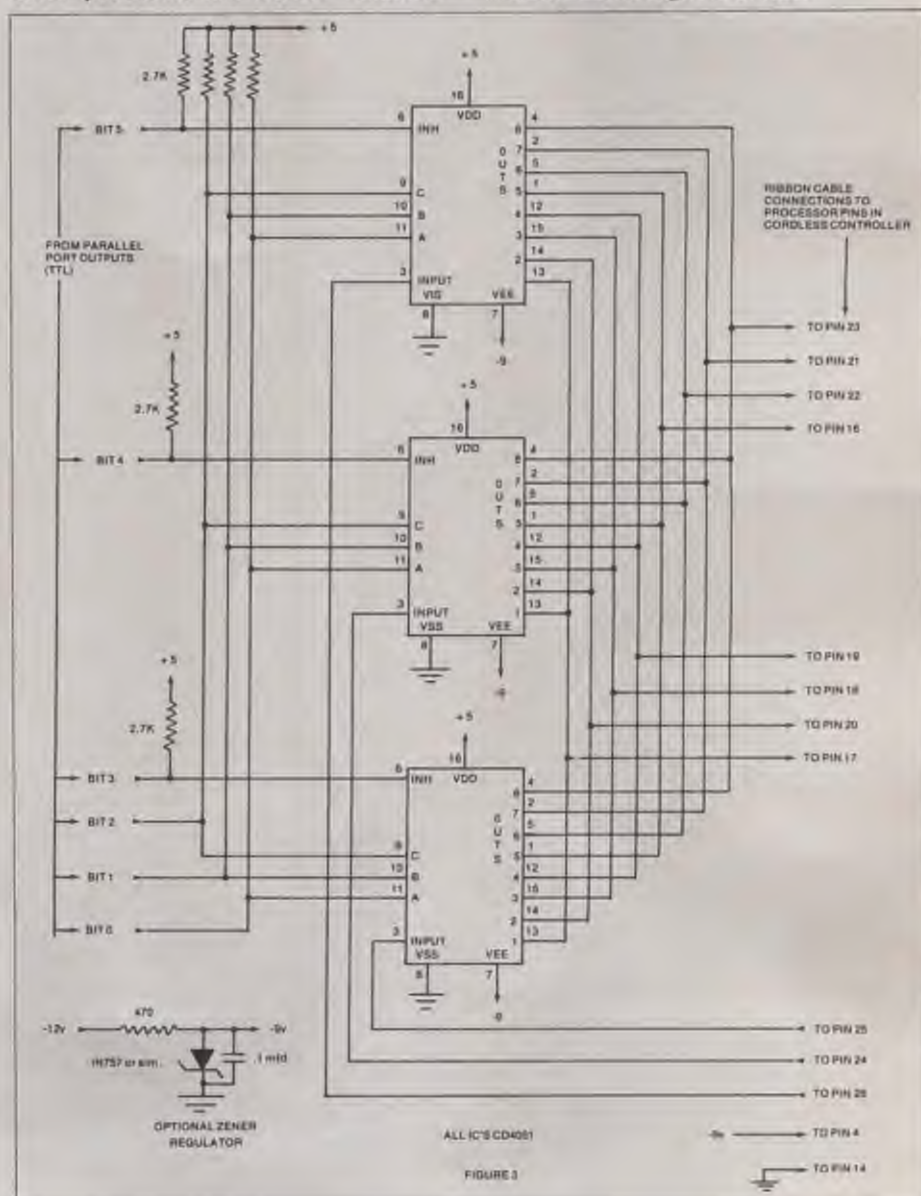

Tomorrow, con't...

You will also need a computer that has a latched parallel output port (TTI compatible). It should also have some way of providing regulated +5 volts and -9 to -12 volts. If you have an S-100 bus computer we will show you how to wire up a suitable port in the event you don't have a spare one. In a followup article we'll provide details for interfacing to some of the other popular home computers.

You'll need some kind of perf-board and the necessary sockets, wire and components. If you're building the S-100 version you should get an S-100 "prototyping board." I used the one from Artec Electronics and, though it's not the best, it's adequate. (It's inexpensive, anyway.)

You'll also need to decide what construction method you want to use. To be really elegant you might want to design and etch your own PC board. You might want to use point to point soldering; or, you might choose the method I used, which is wire-wrap. I used the Vector SliT'nWrap which is very convenient and a great time saver.

All of the components may be purchased at most hobbyist oriented electronics stores such as Radio Shack, Olson, Lafayette, or from any of the many mail order parts suppliers such as:

Godbout Electronics
Box 2355
Oakland Airport, CA 94614
(415) 562-0636

Jade Computer Products
4901 West Rosecrans
Hawthorne, CA 90250
(213) 679-3313

Jameco Electronics
1021 Howard Ave.
San Carlos, CA 94070
(415) 592-8097

Advanced Computer Products
P.O. Box 17329
Irvine, CA 92713
(714) 558-8813

Write or call for their catalogs and current prices.

The schematic for the interface is shown in Figure 3. Wire up the circuitry exactly as shown. The inputs and outputs to the cordless controller will be connected via a ribbon cable. The cable can be directly wired to the interface circuitry or you may want to use some sort of connector so it can be disconnected. The choice of connector system is up to you. I chose to use an IC socket and a DIP header on the S-100 board.


The hardest part of the construction is wiring the ribbon cable up to the cordless controller, so I will try to detail it here as best I can. The

cable length should be less than 36 inches.

Begin by removing the back of the cordless controller. You will notice that there is a circuit board with a 28 pin IC, a few discrete components and the ultrasonic transducer. Do not attempt to remove the circuit board as all the keys will fall out.

We are going to solder the ribbon cable directly to the pins of the IC. Begin by removing the battery (if there is one). Take your soldering iron (nothing above 40 watts!) and apply small dabs of solder to the following IC pin numbers: 4, 14, 16 through 26 and 28. Be careful not to create any solder "bridges" between the pins. Now take the ribbon cable and prepare the end by separating the wires from each other back about an inch. Strip about 1/8 of an inch of insulation off each wire. Twist the strands of each wire together and then apply solder to these ends. Don't apply big globs of solder, just enough to keep the strands together and to make soldering to the IC pins easier. Do this for each of the wires.

Now we are ready to attach the cable to the IC pins. Making sure that you have the right wire going to the right pin number as shown in the schematic (Figure 3), hold the wire against the pin of the IC and touch the soldering iron to the wire and pin together. Since there is solder on the pin and the wire, they should melt together and no further solder should

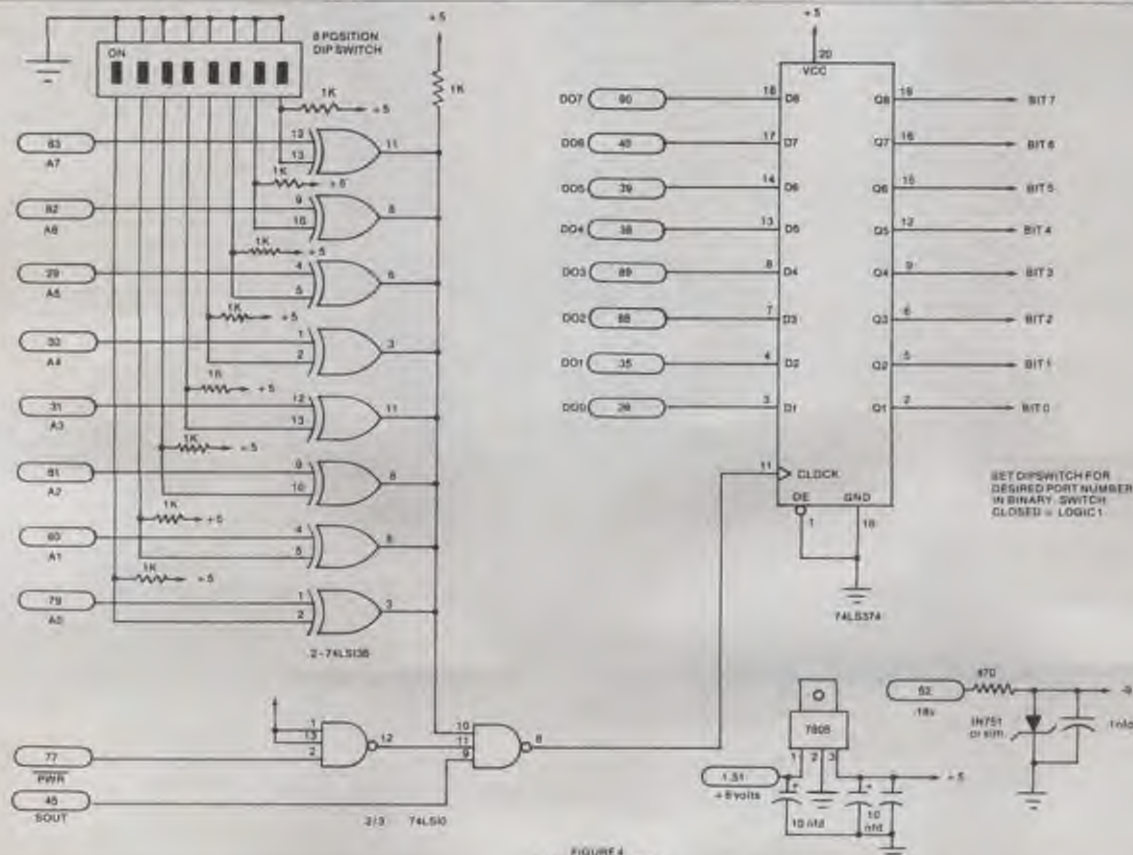FIGURE 4
5-1 DI PARALLEL PORT

Tomorrow, con't...

be needed. This alleviates the need to grow a third arm and hand. As soon as you see the solder flow, remove the iron and hold the wire still until the solder cools. Take extreme caution not to create solder bridges between the IC pins. Repeat this procedure until all 13 wires have been attached. Double check all your connections for solder bridges, and to see that everything is wired according to the schematic.

Attach the interface to your parallel port by whatever method is convenient. Put a fresh 9 volt battery into the cordless controller (only the battery seems to be able to provide enough current for the transducer). Set the cordless controller down such that the command console can receive the signals. All that remains to do is turn on the computer and see if it works.

If your port has -12 available but not -9, you will need to build the optional zener regulator shown in the schematic. If you're building the S-100 version, this part of the schematic is duplicated in Figure 4. Don't build it twice.

Circuit Operation

At this point I'd better explain how the hardware works. This will help you understand the software requirements, which I'll get to later.

Referring to the interface schematic in Figure 3, you will see that the eight outputs of the multiplexers are tied together. This would cause a problem except that the outputs are turned off if the inhibit input (pin 6) is high. The select inputs (pins 9, 10 and 11) are also tied together. The select inputs are connected to the lower three bits of the parallel output port. Thus, the code on these bits select which of the eight outputs will have the input signal (pin 3) switched to it. Each of the multiplexer outputs is connected to one of the row inputs of the processor in the cordless controller.

The inhibit inputs of the three IC's are left separate and are connected to the next higher three bits of the parallel port. Thus, a low level on one of these lines will select one of the three IC's to be operable. With these 6 bits of the parallel port we can select one of the three IC's and one of the outputs of that IC.

The input to each multiplexer is connected to one of the column outputs from the processor in the cordless controller. The proper 6 bit code will allow the switching of the column outputs to any of the row

inputs. This is exactly what happens when a key is pressed, which means we have successfully emulated the key presses with the computer.

The Software

Now, onto the software. Basically, all the software has to do is to output the appropriate 6 bit code to the parallel port to cause things to happen. There are a few minor wrinkles, however.

If you look at the table of codes (Table 1), you will see that there are 23 separate codes: 16 numeric codes, 6 command codes and 1 null code. The null code is very important. We must send this in between each command code. This simulates taking your finger off the key. It should also be sent after each sequence of codes to preserve the battery life in the cordless controller, as significant battery power is only drawn when keys are pressed.

Table of Command Codes

COMMAND	HEX CODE	DECIMAL CODE
NULL	FF	255
1	D8	216
2	E8	232
3	D9	217
4	E9	233
5	DA	218
6	EA	234
7	DB	219
8	EB	235
9	DC	220
10	EC	236
11	DD	221
12	ED	237
13	DE	222
14	EE	238
15	DF	223
16	EF	239
ON	F1	241
ALL LIGHTS ON	F2	242
BRIGHT	F3	243
OFF	F5	245
ALL OFF	F6	246
DIM	F7	247

Table 1.

The other wrinkle is that the computer can send the codes out to the port much too fast for the processor in the controller to respond. So a delay must be added after each code is sent. This is most easily accomplished with a "delay loop" in software. This is also why the parallel port must be of the latched type. The delay time should be 1/2 to 1 second.

The software sequence should go like this:

1. Send null code.
2. Send numeric code.
3. Delay for 1/2 to 1 second.
4. Send null code.
5. Delay.
6. Send command code.
7. Delay.
8. Send null code.
9. Done.

The easiest way to play with the system is to use Basic with an OUT or POKE command, or with a machine language monitor using OUT instructions. Start by using the direct execution mode of your Basic (that's when you type Basic command statements directly from the keyboard, not in program lines). The time it takes to type should be enough delay. Be sure to send the null codes or the next command will be ignored.

Writing a Basic subroutine to take a command value and output it with the necessary nulls and delay should not be difficult. A simple for-next loop should be adequate for delay purposes. The number of iterations (times through the loop) will depend on the speed of your Basic.

Summary

Well, there you have it. An interface to all your home lights and appliances. What can you do with that? I'm sure you've thought of several uses by now, but the best way I've found to come up with uses is to sit around with some friends and brainstorm. I though the perfect use would be for an intelligent security system. Not necessarily for alarms but to simulate people being in the house when you're away. With the computer in control you can make it look like someone is walking around the house by turning room lights on and off in a logical sequence, along with the TV, stereo and other devices.

Other uses might be to turn on the coffee pot a few minutes before your alarm goes off in the morning or the room heater.

There are a few things we left uncovered in this article: 1.) You can't change the house codes with the cordless controller. 2.) The computer should have a real-time clock to be useful in most of these applications. 3.) A software command processing system is needed to work with the real time clock. 4.) We promised to show you connections for some of the other popular computers.

In the follow-up article we'll show you how to solve all this unfinished business but for now you have enough to get started. Good Luck! □

NOTE: The contents of this article are presented for personal use only. Permission is granted by the author to individuals to construct the circuits in this article for their own personal use. Any commercial use of the circuitry is strictly forbidden without the author's prior written permission.
Entire Contents Copyrighted ©1979 by Mark Garetz.

We have acquired the rights to all TDL software (& hardware). TDL software has long had the reputation of being the best in the industry. Computer Design Labs will continue to maintain, evolve and add to this superior line of quality software.

— Carl Galletti and Roger Amidon, owners.

All of the software below is available on any of the following media for operation with a Z80 CPU using the CP/M* or similar type disk operating system (such as our own TPM*).

for TRS-80* CP/M (Model One)
for 8" CP/M (soft sector single density)
for 5 1/4" CP/M (soft sector single density)
for 5 1/4" North Star CP/M (single density)
for 5 1/4" North Star CP/M (double density)

BASIC I

A powerful and fast Z80 Basic interpreter with EDIT, RENUMBER, TRACE, PRINT USING, assembly language subroutine CALL, LOADGO for "chaining", COPY to move text, EXCHANGE, KILL, LINE INPUT, error intercept, sequential file handling in both ASCII and binary formats, and much, much more. It runs in a little over 12 K and is ROMable. An excellent choice for games since the precision was limited to 7 digits in order to make it one of the fastest around. \$69.95.

BASIC II

Basic I but with 12 digit precision to make its power available to the business world with only a slight sacrifice in speed. Still runs faster than most other Basics (even those with much less precision). \$99.95

BUSINESS BASIC

The most powerful Basic for business applications. It adds to Basic II with random or sequential disk files in either fixed or variable record lengths, simultaneous access to multiple disk files, PRIVACY command to prohibit user access to source code, global editing, added math functions, and disk file maintenance capability without leaving Basic (list, rename, or delete). \$159.95.

ZEDIT

A character oriented text editor with 26 commands and "macro" capability for stringing multiple commands together. Included are bidirectional search with optional replace and a complete array of character move, add, delete, and display functions. \$49.95.

ZTEL

Z80 Text Editing Language - Not just a text editor. Actually a language which allows you to edit text and also write, save, and recall programs which manipulate text. Commands include conditional branching, subroutine calls, iteration, block move, expression evaluation, and much more. Contains 36 value registers and 10 text registers. Be creative! Manipulate text with commands you write using Ztel. \$68.95.

TOP

A Z80 Text Output Processor which will do text formatting for manuals, documents, and other word processing jobs. Works with any text editor. Does justification, page numbering and headings, spacing, centering, and much more! \$68.95

*Z80 is a trademark of Zilog

*TRS-80 is a trademark of Radio Shack

MACRO I

A macro assembler which will generate relocatable or absolute code for the 8080 or Z80 using standard Intel mnemonics plus TDL/Z80 extensions. Functions include 14 conditionals, 16 listing controls, 54 pseudops, 11 arithmetic/logical operations, local and global symbols, chaining files, linking capability with optional linker, and recursive / reiterative macros. This assembler is so powerful you'll think it is doing all the work for you. It actually makes assembly language programming much less of an effort and more creative. \$49.95

MACRO II

Expands upon Macro I's linking capability (which is useful but somewhat limited) thereby being able to take full advantage of the optional Linker. Also a time and date function has been added and the listing capability improved. \$68.95

LINKER

How many times have you written the same subroutine in each new program? Top notch professional programmers compile a library of these subroutines and use a Linker to tie them together at assembly time. Development time is thus drastically reduced and becomes comparable to writing in a high level language but with all the speed of assembly language. So, get the new CDL Linker and start writing programs in a fraction of the time it took before. Linker is compatible with Macro I & II as well as TDL/Xitan assemblers version 2.0 or later. \$68.95

DEBUG I

Many programmers give up on writing in assembly language even though they know their programs would be faster and more powerful. To them assembly language seems difficult to understand and follow, as well as being a nightmare to debug. Well, not with proper tools like Debug I. With Debug I you can easily follow the flow of any Z80 or 8080 program. Trace the program one step at a time or 10 steps or whatever you like. At each step you will be able to see the instruction executed and what it did. If desired, modifications can then be made before continuing. It's all under your control. You can even skip displaying a subroutine call and up to seven breakpoints can be set during execution. Use of Debug I can pay for itself many times over by saving you valuable debugging time. \$69.95.

DEBUG II

This is an expanded debugger which has all of the features of Debug I plus many more. You can "trap" (i.e. trace a program until a set of register, flag, and/or memory conditions occur). Also, instructions may be entered and executed immediately. This makes it easy to learn new instructions by examining registers/memory before and after. And a RADIX function allows changing between ASCII, binary, decimal, hex, octal, signed decimal, or split octal. All

TPM is a trademark of Computer Design Labs. It is not CP/M *CP/M is a trademark of Digital Research

these features and more add up to give you a very powerful development tool. Both Debug I and II must run on a Z80 but will debug both Z80 and 8080 code. \$88.95.

ZAPPLE

A Z80 executive and debug monitor. Capable of search, ASCII put and display, read and write to I/O ports, hex math, breakpoint, execute, move, fill, display, read and write in Intel or binary format tape, and more! Disk \$19.95. Also available in 2Kx8 ROM with initialization for the SMB I or II (3 ACIA's and 1 PIA) \$34.95.

SMB II bare board \$49.95.

One PIA and four 74LS244's for SMB II \$12.95

8080 version of Zapple - disk \$19.95
on 2516 \$49.95

TPM*

A NEW Z80 disk operation system! This is not CP/M*. It's better! You can still run any program which runs with CP/M* but unlike CP/M* this operating system was written specifically for the Z80* and takes full advantage of its extra powerful instruction set. In other words its not warmed over 8080 code! Available for TRS-80*, Tarbell, ICOM, Xitan DDDC, SD Sales "VERSA-FLOPPY", North Star (SD&DD), and Digital (Micro) Systems. \$49.95.

PAYROLL

The Osborne package. Requires C Basic 2 2 disks \$74.95 Book \$15.00

ACCTS REC/ACCTS PAY

By Osborne. Requires C Basic 2 \$99.95
Book \$15.00.

GENERAL LEDGER

By Osborne. Requires C Basic 2 \$99.95
Book \$15.00

C BASIC 2

Required for Osborne software \$99.95
Manual included.

ORDERING INFORMATION

Visa, Master Charge and C.O.D. O.K. To order call or write with the following information.

1. Name of Product (e.g. Macro I)
2. Media (e.g. 8" CP/M)
3. Price and method of payment (e.g. C.O.D.) include credit card info, if applicable.
4. Name, Address and Phone number.
5. For TPM orders only: Indicate if for TRS 80, Tarbell, Xitan DDDC, SD Sales (5 1/4" or 8"), ICOM (5 1/4" or 8"), North Star (single or double density) or Digital (Micro) Systems.
6. N.J. residents add 5% sales tax.

For Phone orders only call toll free

1-800-327-9191 Ext. 676

(Except Florida)

1-800-432-7999 Ext. 676 (Florida)

Computer Design Labs

342 Columbus Avenue
Trenton, N.J. 08629

Dealer inquiries invited.



Computer Aided Manufacturing

Part II: Data Base & Reporting Activities

Chuck Carpenter

In Part I we discussed the Manufacturing Operations environment and concluded with a promise to continue with development of Data Base Contributors (and several related topics). Let's start there and follow CAM to its conclusion.

Contributors To The Data Base

Manufacturing Bill of Materials - This is the key, most significant element for establishing the product assembly environment. The bill of material represents the engineering drawings for the product. Bills of material (or Parts Lists) become the basis for:

- Inventory Control, purchasing and stores
- Assembly Instructions
- Work stations
- Labor standards
- Product Cost
- Manpower Planning
- Packaging
- Quality, Receiving and In-process

Developing a computer controlled manufacturing operations system will start with the bill of material. Everything that happens to the parts, once they are in your plant, will become value added to the product. The overheads for storage, the handling and assembly efficiency, loss and attrition of material all contribute to the cost of the product. Or, even more significantly, the final profit is affected by how efficient the flow of material is handled. Lack of efficiency shows up as off-standard cost and an increase in the operating overhead cost. Listing 1 illustrates a manufacturing bill of material and includes significant information for data base development. (Figure 1 represents a part numbering technique. This technique reduces the amount of information needed to describe and define an item.)

Chuck Carpenter, 2228 Montclair Pl., Carrollton, TX 75006.

*** MANUFACTURING BILL OF MATERIAL ***

PART #	DESCRIPTION	#/A USED	OWN LBR/STD	COST
12A687A	FRIZHARIS	1	12A234E	4.1
31P842C	WIDGET	1	12A687A	3.17
81P123D	SHURFER	1	12A687A	2.68
15P987F	HOCKER	5	12A687A	.05
61P543A	BUZZER	1	12A687A	1.18
12P501B	HPINGER	2	12A675A	.15
21P109E	BINDER	5	12A675A	.15
77P234A	JAMMER	1	12A675A	1.76
34P140B	HUMMER	1	12A675A	1.13
99P673A	WOBBLER	1	12A675A	2.09
15P332C	DUNKER	1	12A675A	1.36

Listing 1A Manufacturing Bill of Material.

Assembly Instructions - This is the most significant document to be developed from the bill of material. The Assembly Instruction (AI) is an interpretation of engineering documentation and represents the methods used to build the product. The intent of the design criteria is accomplished through the techniques implemented by the AI. The following information should be contained in the AI:

- List of Material used
- Elements of assembly instructions
- Assembly tools used
- Work station configuration
- Special methods information
- Standard Assembly Time

Configuration and cost data bases are developed from the AI. The material needed to build a production

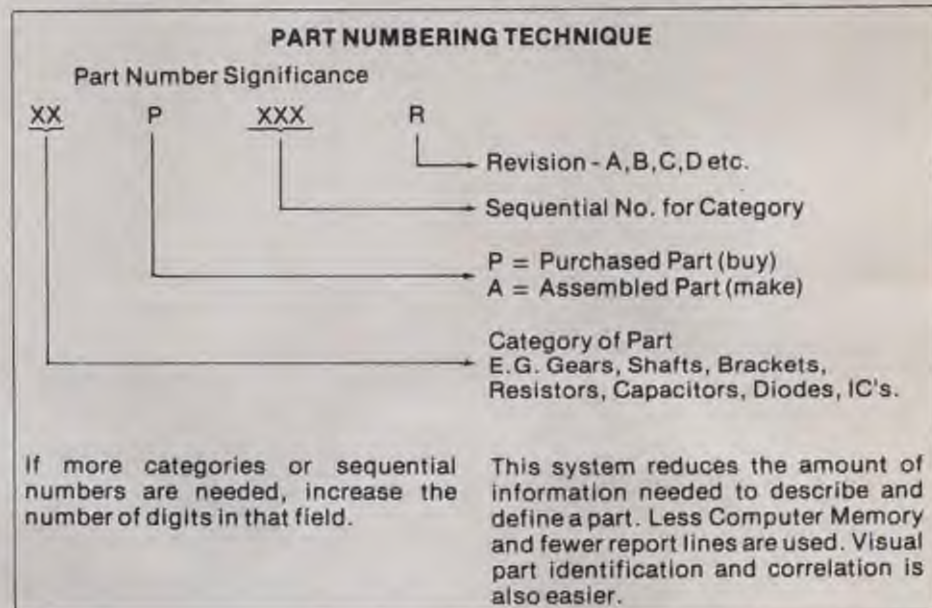


Figure 1 Part Numbering Technique.

CAM, con't...

lot can be determined from the AI. Production control scheduling and work-in-process inventory are controlled through the AI, and the amount of space needed and the time it takes to do the job can be determined from the AI. A typical assembly instruction is shown in listing 2a and 2b. The assembly instruction draws heavily on the data base information: bills of material, labor standards, and

product cost being significant contributors. As much detail as is required to meet the intent of your engineering design and establish the manufacturing cost should be included as part of your total AI package.

Work Station Development - Total facility requirements needed to efficiently build, test, package and transport the product during the manufacturing cycle are developed from individual work station design. By assembling each work station into

an integrated production line, you can develop a product flow concept. The flow you design should include enough detail to minimize the areas where excessive costs would occur. If your product is material intensive, then consideration of material waste may be your major goal. If the goal you are after is labor intensive, then look for methods to reduce the time it takes to do the task.

Labor Standards - Why does a small company need labor standards? The more accurately you want to know the cost of building your product, the more accurately you need to measure the labor content of the product. Additionally, overhead analysis and profitability need to be calculated and measured from an accurate direct labor base. Estimating costs for a bid package will be more accurate and with less error margin if labor is measured and not guessed at. This holds true whether you're running a job shop or a high volume production line.

Everything that happens to the parts, once they are in your plant, will become value added to the product.

Incentive, non-incentive and measured day work are assembly environments where labor standards can be used. Work measurement includes stop watch techniques, pre-determined labor standards and standard data. Stop watch techniques require more manpower to administer and are highly subjective in the area of leveling and effort determination. Pre-determined standards range from complex for detailed assembly to simple for tasks that are less labor intensive. Predetermined standards can be established in advance of actual assembly and need only to have a detailed process and method to insure accuracy. Factors related to the personality of your operating environment can be included to adjust the final labor cost. Some of these factors are:

- Personal, Fatigue and Delay allowances (PF&D) — Includes breaks, personal hygiene, start up and clean up and slowing of pace due to tiring
- Absenteeism
- Utilization
- Balancing delay (progressive line)
- Material Shortages
- Structural Complexity

```

**** ASSEMBLY INSTRUCTION ****

PART #: 12A687ADESC:FRIZNARIS    DATE:05/05/79
USED ON #: 10A234E

BLELOC QTY PART #    METHOD                TOOL #

20
A    1    81P542C    GET FROM PART LOCATIONS
B    1    81P123D
D    1    61P543A

        USING TOOLS                1H3562
                                    2D3487
                                    6S1652

        ASSEMBLE TOGETHER WITH
        PARTS FROM LOCATIONS

C    2    15P987F
F    2    21P109E    8 TORQUE TO 8 IN.LBS.

LABOR STANDARD: 0

**** ASSEMBLY INSTRUCTION ****

PART #: 12A687ADESC:FRIZNARIS    DATE:05/05/79
USED ON #: 10A234E

BLELOC QTY PART #    METHOD                TOOL #

20
E    2    13P501E    GET FROM PARTS LOCATIONS
G    1    77P234A
H    1    34P140E
I    1    95P673A

        USING TOOLS FROM ELE. 10
        ASSEMBLE TOGETHER WITH
        PARTS FROM LOCATIONS

C    2    15P987F
F    2    21P109E    8 TORQUE TO 8 IN.LBS.

LABOR STANDARD: 0
  
```

Listing 2A Assembly Process Example.

```

**** ASSEMBLY INSTRUCTION ****

PART #: 12A687ADESC:FRIZNARIS    DATE:05/05/79
USED ON #: 10A234E

BLELOC QTY PART #    METHOD                TOOL #

25
        VERIFY ALL DIMENSIONS
        USING GUAGE                912107

        VERIFY ALL TORQUES
        USING GUAGE                911738

        NO INTERACTIONS ON
        THIS ASSEMBLY

LABOR STANDARD: 0
  
```

Listing 2B Inspection Process Example.

CAM, con't...

Once these factors are accounted for, a true value of labor cost can be established. Any technique of labor measurement; stop watch, empirical or predetermined will yield the desired end result. The degree of accuracy needed will influence your choice.

The intent of the design criteria is accomplished through the techniques implemented by the AI.

Figure 2 illustrates a labor standard developed from predetermined time standards. Once the standard data is developed, it is an easy step to computerize the generation of labor standards and costs based on work content description.

Product Cost Estimate - At this point, with the various costs established, the cost of your product can be estimated. Accuracy of your estimate will depend on how many of the values are educated guesses. With actual values such as data from purchase orders, accurate quotes from suppliers and measured values for

material and labor overhead, the estimate will be quite accurate. Improvement of accuracy will occur as your product ages toward end-of-life. Data developed to estimate product costs can become part of your data base for future cost development tasks. Adding factors to historical data to account for economic and other changes (inflation, etc.) will keep your data valid. A computerized summary is easily generated from the system data base.

Manpower Planning - Direct labor, your main manpower requirement, can be determined from the labor standards. With all the factors included that affect your absolute efficiency, the number of people needed is the hours it takes to do the job divided by the hours available in a work period (shift, day, etc.). Listing 3a is a sample RUN and 3b is a utility program to calculate direct manpower. Indirect manpower, such as material handlers, inspectors or any others that don't directly add value to your product are harder to establish. Your best estimate is needed here. Indirect work measurement studies can be implemented later. But these more sophisticated methods take manpower to support. Outside help is a viable alternative and you may

```

***** MANPOWER PROGRAM *****
INPUT VARIABLES TO BE USED FOR
MANPOWER CALCULATIONS

MONTH/YR. 05/05/79
NO. OF MACHINES 100
LABOR STD-HRS/UNIT 3.0
HEDGE PERCENT 1.05
ATT. UTIL. EFF.-FACTOR .75
WORK DAYS/MONTH 21

CALCULATIONS:

EQUIVALENT HOURS = 490
AVAILABLE HOURS = 168
EQUIVALENT DIRECTS = 2.92
FACTOR INDIRECTS BY DIRECTS
AS A PERCENTAGE
ANY MORE CALCULATIONS Y/N N
    
```

Listing 3A Direct Manpower Calculation.

choose to get temporary help from a consulting organization. Be sure to find one that can realistically relate to your situation. Again, the consultant fee, similar to hiring a programmer, is typically \$20 to \$35 an hour.

Packaging and Shipping - Here's another area where outside help may be your best choice. If your product can be damaged in shipment to the point of sale, then adequate packaging is a must. All your effort to produce a saleable item, that you expect profit from, is lost if you can't sell it. Your potential customers aren't interested in buying obviously damaged material or finding latent damage in the product when put to use. Anything you ship, regardless of how pretty you want the package, should meet the requirements of the National Safe Transit and Handling Standards. These standards, if met, will insure safe arrival of your product a high percentage of the time. Preventing the loss of goodwill is more effective than trying to overcome it after the fact.

Progress and Efficiency - Now that you have established how the product will be manufactured it's time to measure how well you're doing it. If you have established the profit you want to make and the cash flow that profit will generate, then measuring your progress on a real time basis is necessary. To protect your profit position, waiting for a periodic financial report may be too little too late. Use of progress curves and progress curve measurement techniques is a practical approach. Progress curves are used extensively by several national and multinational firms (IBM, Texas Instruments, etc.). However, the techniques are simple enough and use in a small company is very practical. The benefits derived are well worth the effort to implement

PROCESS ANALYSIS CHART		Assy No.		Desc.		Page		Pages	
		XX A XXX A		Conduit Coupling		1 of 1			
		Op No.		Special Items		Analyst			
		10		None		Carpenter			
Line	Part No.	Assembly Step				No.	Code	Time	
1	XX P XXX A	Get Threaded Body with R.H.					Ha 32	34	
2		Position in L.H. Large End Out					TA 6	7	
3		Regrasp in Hand to Reposition.					TA 6	7	
4	XX P XXX A	Get Insert to Body Round End 1st.					HB 32	48	
5		Push in Place					TA 6	7	
6		Get Large Bushing					HB 32	48	
7	XX P XXX A	Start on Threads.					TA 6	7	
8		Run Down One Full Thread.				2	HA 6	36	
9		Tighten Finger Tight					TA 6	7	
10	XX P XXX A	Turn Part in Hand to Small End Out.				2	TA 6	14	
11		Get Pipe Nut					HB 32	48	
12		Start on Threads					TA 6	7	
13		Run Down 5 Full Threads				10	HA 6	180	
14		Tighten Finger Tight					TA 6	7	
15		Aside to Bin					TA 32	16	
		473 + %PF&D x 10-3 = HRS/ C		473 + %PF&D 1666.67 = MIN/PIECE			Total Time = 473		

Figure 2 Labor Standard Using Predetermined Time.

**TRS-80
owners
LOOK**
at these Programs!!!
(and these prices!!!)



Graphic
Drawing
Done
On
The
TRS80
Using
"The
Electric
Artist"
Program!

GRAPHIC-TREK "2000"

This full graphics, real time game is full of fast, exciting action! Exploding photon torpedoes and phasers fill the screen! You must actually navigate the enterprise to dock with the giant space stations as well as to avoid Klingon torpedoes! Has shields, galactic memory readout, damage reports, long range sensors, etc! Has 3 levels for beginning, average, or expert players!

INVASION WORG

Time! 2099 Place: Earth's Solar System. Mission: As general of earth's forces, your job is to stop the Worg invasion and destroy their outposts on mars, venus, saturn, neptune, etc! Earth's Forces: Androids — Space Fighters — Laser Cannon — Neutrino Blasters! Worg Forces: Robots — Saucers — Disintegrators — Proton Destroyers! Multi level game lets you advance to more complicated game as you get better!

STAR WARS

Maneuver your space fighter deep into the nucleus of the Death Star! Drop your bomb then escape via the only escape route. This graphics game is really fun! May the force be with you!

SPACE TARGET

Shoot at enemy ships with your laser gun. If they eject in a lifeboat vehicle, capture them, or if your cruel, destroy them! Full graphics, real time game!

SAUCERS

This fast action graphics game, has a time limit! Can you be the commander to win the distinguished cross? Requires split second timing to win! Watch out! The saucers fight back!

Package One — \$12.95

CHECKERS 2.1

Finally! A checkers program that will challenge everyone! Expert as well as amateur! Uses 3-ply tree search to find best possible move. Picks randomly between equal moves to assure you of never having identical games. Computer also makes sly remarks about the game!

POKER FACE

The computer uses psychology as well as logic to try and beat you at poker. Cards are displayed using TRS-80's full graphics. Computer raises, calls, and sometimes even folds! Great practice for your Saturday night poker match!

PSYCHIC

Tell the computer a little about yourself and he'll predict things about you, you won't believe! A real mind bender! Great amusement for party's.

TANGLE MANIA

Try and force your opponent into an immobile position. But watch out, their doing the same to you! This graphics game is for 2 people and has been used to end stupid arguments. (And occasionally starts them!)

WORD SCRAMBLE

This game is for two or more people. One person inputs a word to the computer while the others look away. The computer scrambles word then keeps track of wrong guesses. Can you make less mistakes than your adversary?

Package Two — \$12.95

POETRY

This exciting and sometimes funny program lets you choose the subject as well as the mood of the poem you want. You give TRS-80 certain nouns or names, then mood, and he does the rest! TRS-80 will write different poetry about one subject forever! If you let him, Has a 1000 word + vocabulary of nouns, verbs, adjectives, adverbs!

ELECTRIC ARTIST

Written by a working artist and a computer engineer to make drawing on the video screen easier then picking up a pencil! (Less messy too!) Manual: Draw, erase, move as well as, Auto: Draw, erase, move. Uses graphics bit's not bytes. Graphic face in ad done using this ingenious program!

GALACTIC BATTLE

The Swineus enemy have long range phasers but cannot travel at warp speed! You can, but only have short range phasers! Can you blitzkrieg the enemy without getting destroyed! Full graphics — real time!

WORD MANIA

Can you guess the computers words using your human intuitive and logical abilities? You'll need to, to beat the computer! He keeps score and gets mad if he loses!

AIR COMMAND

Real time, graphics Flight Simulator! Land, take-off, get out of a spin! Be careful not to stall! Watch your fuel gauge! Requires a clear headed pilot.

Package Three — \$12.95

LIFE

This Z-80 machine language program uses full graphics! Over 100 generations per minute make it truly animated! You make your starting pattern, computer does the rest! Program can be stopped and changes made! Watch it grow!

REAL TIME LANDER

This full graphics simulator lets you pick what planet, asteroid or moon you wish to land on! The "Live" keyboard gives super response that gives you the feeling of being in command! Has 3 skill levels that make it fun for everyone.

GREED II

Multi-level game is fun and challenging! Beat the computer at this dice game using your knowledge of odds and luck! Computer keeps track of his winnings and yours. Quick fast action. This game is not easy!

THE PHARAOH

Rule the ancient city of Alexandria! Buy or sell land. Keep your people from revolting! Stop the rampaging rats and locusts! Requires a true political personality to become good!

ROBOT HUNTER

A group of renegade robots have escaped and are spotted in an old ghosttown on mars! Your job as "Robot Hunter" is to destroy the pirate machines before they kill any more settlers! Exciting! Challenging! Full graphics!

Package Four — \$12.95

SUPER HORSE RACE

Make your bets just like at the real racetrack! 8 horses race in this spectacular graphic display! Up to 9 people can play! Use's real odds but has that element of chance you see in real life! Keeps track of everyone's winnings and losses. This is one of the few computer simulations that can actually get a room of people cheering!

MAZE MOUSE

The mouse with a mind! Computer generates random mazes of whatever size you specify then searches for way out! The second time thru he'll always go fastest route! A true display of artificial intelligence! Full graphics, mazes & mouse!

AMOEBIA KILLER

You command a one man submarine that has been shrunk to the size of bacteria in this exciting graphic adventure! Injected into the president's bloodstream, your mission is to destroy the deadly amoeba infection rampaging his body!

LOGIC

This popular game is based on mastermind but utilizes tactics that make it more exciting and challenging! Has 2 levels of play to make it fun for everyone.

SUBMARINER

Shoot torpedoes at the enemy ships to get points. Fast action graphics, arcade type game is exciting and fun for everybody!

Package Five — \$12.95

20 HOME FINANCIAL PROGRAMS

Did you ever get a loan and wonder if they figured interest or payments correctly? Or did you ever want to see what your payments would be if you borrowed \$ amount at x% interest over x years! Figures amortization, annuities, depreciation rates, interest tables, earned interest on savings and much, much more. This program will get used again and again. A must for the conscientious, inflation minded person.

Package Six — \$12.95

Home Computer Software For Everyday Applications

SIMUTEK

Exceptional Software thru Research & Imagination

Send Check, Money Order or Bank Card No. to:

SIMUTEK ENT.

P.O. Box 35298

Tucson, AZ 85740

Please Add 1.75
Postage & Handling



24 HOUR HOTLINE
(602) 882-3948



Same Day Shipment on Bank Cards & Money Orders

All Programs Require a Minimum of 16K Level 2

Packages Available on Diskette (32K System) \$5.00 Extra

TRS-80 IS A REGISTERED TRADEMARK OF TANDY CORP.

2 or More Packages Get 10% Discount

CIRCLE 200 ON READER SERVICE CARD


```

7005 HOME : PRINT : PRINT : PRINT : PRINT TAB(1
5) "***** MANPOWER PROGRAM *****"
7010 PRINT : PRINT : PRINT "INPUT VARIABLES TO BE
USED FOR:" PRINT "MANPOWER CALCULATIONS"
7015 PRINT : PRINT : INPUT "MONTH/YR.:";M1;Y1
7020 PRINT : INPUT "NO. OF MACHINES:";M1
7030 INPUT "LABOR STD-HRS/UNIT:";L1
7040 INPUT "HEDGE PERCENT.:";S1
7050 INPUT "ATT. UTIL. EFF.-FACTOR:";F1
7060 INPUT "WORK DAYS/MONTH:";D1
7070 PRINT : PRINT "CALCULATIONS:";EH = (M1 * L1
* S1) / F1;AH = D1 * 8;DH = INT ((EH / AH) * 100
+ .5) / 100
7080 PRINT : PRINT "EQUIVALENT HOURS = ";INT (EH
* 100 + .5) / 100
7090 PRINT : PRINT "AVAILABLE HOURS = ";AH
7100 PRINT : PRINT "EQUIVALENT DIRECTS = ";DH
7110 PRINT : PRINT "FACTOR INDIRECTS BY DIRECTS:"
PRINT "AS A PERCENTAGE"
7120 PRINT : INPUT "ANY MORE CALCULATIONS Y/N:";M1
5: IF M1 = "Y" THEN 7015
7130 GOTO 3000

```

Listing 3B Program Segment for Calculating Manpower.

and maintain a progress curve system. Computer aided systems makes this task even more practical.

But, what is a progress curve? Listing 4 (a, b and c) illustrates a typical curve (simplified) as it appears on log paper. The slope of the curve represents the improvement rate or progress of your manufacturing system. The curve starts with the time needed to build the first unit and ends with the last unit; the end of life for the product. Standard cost of the product is the horizontal line. This repre-

sents the estimated or predetermined labor cost of the product. The area of the curve prior to the standard cost point is learning cost. The area of the curve after the standard cost point is payback resulting from increased efficiency. (Efficiency is determined from the ratio of planned versus actual manufacturing costs.) The slope of the curve changes with the effort expended to support manufacture of the product and the slope will be different for the type of product being manufactured. The amount and

skill of labor needed to build the product influences the rate of progress. Light electronics assembly typically progresses on an 80% slope. This improvement is somewhat misleading. The progress is actually a 20% reduction in assembly time each time the quantity of product (produced continuously) doubles. I included 'produced continuously' because products produced other than continuously affect the learning rate and increase the standard cost.

I've covered the subject rather briefly and this area deserves a more thorough treatment. The subject of progress curves is fascinating and

Once the standard data is developed, it is an easy step to computerize the generation of labor standards and costs based on work content description.


provides an effective way of predicting and measuring manufacturing productivity. Here are a few of the things you can do with progress curve techniques:

- Predict: Direct Labor Hours
- Learning Cost
- Rework Cost
- Downtime
- Material Cost
- Establish Actual Progress
- Indicate Efficiency
- Determine: Product Cost
- Profit
- Line Balance
- Manpower
- Management
- Support
- Product Life

There are a number of calculations possible that determine characteristics of these curves. Simply drawing a curve on log-log graph paper and making predictions on several alternatives is possible, too. Such calculations can also be included as part of a computer program. In this case, your predictions on several alternatives are made quickly and automatically. Actual data, developed over product life, can be input and adjustments made to the support of the product as determined by the results. Profit goals are thus kept in line on a real time basis.

More Data Base Users

Quality Plan - In most small businesses a quality plan is often minimal to non-existent. If your business is with the government, then a quality plan is a requirement (with few exceptions). Again, to prevent loss of goodwill and customer acceptance of

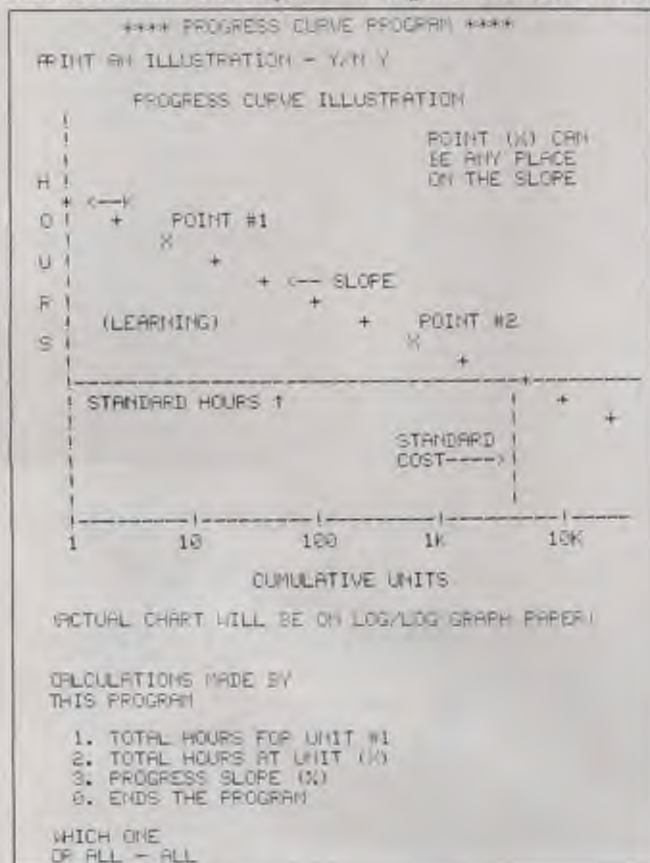

Listing 4A Example of a Progress Curve.

THERE ARE SEVERAL WAYS TO BUY A SMALL COMPUTER. HERE'S WHY BUYING FROM US MAKES MORE SENSE.

We offer you more and better choices. Sunshine Computer Company sells the best selection of small computers available including DEC's 11/03 and 11/23, Cromemco's Z2-H and System Three, the new TI 99/4, plus the best of Apple North Star, and Vector Graphic. From personal systems with floppy disks to full-fledged business systems with as much as 60 megabytes of on-line storage. We can help you find the right software, too. We feature powerful, field-proven packages for general business applications by companies like Structured Systems Group, Serendipity Systems, and Professional Systems Development, Inc. We also offer packages for specialized applications like property management, word processing, and data base management.

Better support than the little guys. When you buy a system from us, that's just the beginning. We stand behind every system we sell. Completely. Our factory-authorized service personnel can handle any hardware woes. Our expert programming staff can help you develop new applications or modify one of our proven off-the-shelf software packages to fit your special needs. Try getting that kind of support from your local computer store.

Better prices and delivery than almost anyone. Price a system from one of the other big computer companies. Find out how long their lead time is. Then talk to us. We can sell for less because we buy in volume and pass the savings on to you. And, since we have most models already in stock, delivery is prompt.

We're nearby. We're freeway-close to all of Southern California, located midway between L.A. and Orange County, just off the San Diego Freeway. Come in and look at our demo systems. They're up and running in their optimum configurations so you can see exactly what you're getting. If you are out of the Southern California area, try our mail order service. Many of our customers have found it more convenient than going to their local computer store. For more information, call (213) 327-2118.



SUNSHINE COMPUTER COMPANY
The Sensible Alternative.

CAM, con't...

your product, a quality plan is desirable. Three major areas of your production cycle should be considered:

- Incoming material quality
- Inprocess assembly
- Outgoing product quality

The Quality Control Handbook by Juran contains a wealth of information. The material covers many sizes and types of manufacturing environments. Any quality environment must be designed with your profit in mind. Quality can be controlled and made to pay for itself. It's very easy for rejectionitis to creep into a quality organization. Organizing your quality plan with an ACCEPTANCE philosophy keeps the attitude positive. You want to ship everything you should but keep below-standard items from getting into the market.

Report and Controls - Your job as

PRINT = LIST OF VARIABLES = VARY

VARIABLES USED BY
THIS PROGRAM

THOSE CALCULATED

PS = PROGRESS SLOPE AS A %
HR = TOTAL HOURS AT UNIT (X)
K = TOTAL HOURS AT UNIT #1

THOSE REQUIRING INPUT

X = CUM UNITS AT POINT (X)
X1 = CUM UNITS AT POINT #1
X2 = CUM UNITS AT POINT #2
Y = HRS/UNIT AT STD COST
Y1 = HRS/UNIT AT POINT #1
Y2 = HRS/UNIT AT POINT #2
N = EXPONENT (LOG S/LOG 2)
S = PROGRESS SLOPE AS A DECIMAL
S1 = INT. CALC OF 'PS'

NOTE: CUM UNITS & LINE BAL UNITS
CAN BE THE SAME DEPENDING
ON THE CALCULATION.
I.E. PAYBACK CALCULATIONS

INPUT VARIABLES TO BE USED FOR
PROGRESS CURVE CALCULATIONS

CUM UNITS AT POINT (X) = 1212
HRS/UNIT AT STD COST = 3.5
SLOPE AS A DECIMAL = .8
CUM UNITS AT POINT #1 = 50
CUM UNITS AT POINT #2 = 900
HRS/UNIT AT POINT #1 = 25
HRS/UNIT AT POINT #2 = 6

CALCULATIONS:

1. TOTAL HOURS AT UNIT #1 = 34.41
2. TOTAL HOURS AT UNIT 1212 = 6225.29
3. PROGRESS SLOPE AS A % = 71.62

3. ENDS THE PROGRAM

WHICH ONE
OF ALL - %

Listing 4B Sample Progress Curve Calculation.

```

3130 HOME : PRINT : PRINT : PRINT : PRINT "INPUT
VARIABLES TO BE USED FOR": PRINT "PROGRESS CURVE C
ALCULATIONS"
3140 PRINT : INPUT "CUM UNITS AT POINT (X) = "X:
3150 INPUT "HRS/UNIT AT STD COST = "Y:
3160 INPUT "SLOPE AS A DECIMAL = "S:
3170 INPUT "CUM UNITS AT POINT #1 = "X1:
3180 INPUT "CUM UNITS AT POINT #2 = "X2:
3190 INPUT "HRS/UNIT AT POINT #1 = "Y1:
3195 INPUT "HRS/UNIT AT POINT #2 = "Y2:
3200 PRINT : PRINT : PRINT "CALCULATIONS": PRINT
: PRINT
3210 IF PC# = "ALL" OR PC# = "1" THEN 2300
3240 IF PC# = "2" THEN 2400
3250 IF PC# = "3" THEN 2500
3300 K = Y / X * ( LOG (S) / LOG (2) )
3305 K = INT (K + 100 + .5) / 100
3310 PRINT : PRINT "1. TOTAL HOURS AT UNIT #1 = "
K:
3315 IF PC# < "ALL" THEN PRINT : PRINT
3320 IF PC# < "ALL" GOTO 2040
3400 H = LOG (S) / LOG (2)
3410 HR = ((X + .5) * (H + 1)) - ((.5) * (H + 1))
+ ((K) / (H + 1))
3415 HR = INT (HR + 100 + .5) / 100
3420 PRINT : PRINT "2. TOTAL HOURS AT UNIT "X:
= "HR:
3425 IF PC# < "ALL" THEN PRINT : PRINT
3430 IF PC# < "ALL" GOTO 2040
3500 S1 = (( LOG (Y1) ) - ( LOG (Y2) ) ) / ( LOG (X
1) ) - ( LOG (X2) ) ) * ( LOG (2) )
3510 PS = (2.718283 * S1) * 100
3515 PS = INT (PS + 100 + .5) / 100
3520 PRINT : PRINT "3. PROGRESS SLOPE AS A % = "
PS:
3525 IF PC# < "ALL" THEN PRINT : PRINT
3530 IF PC# < "ALL" GOTO 2040
3540 PRINT : PRINT : PRINT : GOTO 2040

```

Listing 4C Program Segment for Calculating
Progress Curves.

a manager has only started with the development of a manufacturing plan. The tasks of measuring, interpreting, reporting and implementing any required corrective action will now become the major activities. Timely input and reaction capability will be necessary if you want to avoid panic responses to real problems. This is the most likely area for computer aided reporting. With all your data in a computer data base it becomes a simple matter to report the status of any (or all) of the various parts of your manufacturing plan. By designing the system to generate output on an exception basis the paper flow can be kept to a minimum too.

Your predictions on several alternatives are made quickly and auto- matically.

Don't let the generation of reports become an activity trap. Generate only the information needed to support your decisions and avoid letting the computer make decisions for you. Computers can compare alternatives on a cold calculated basis. But computers can't make judgments. Refer back to the rules of thumb by Robert Townsend. This insight into the potential of strangulation by computer output is significant. Let your computer (or automated) system work for you.

What Did He Say ?

A lot of information has been covered in this article. Some of it in detail. Some of it glossed over possibly a little too much. All of the information needs more detail, especially the section on progress curves and manufacturing efficiency. This section would be well placed at the beginning of an extended treatment of computer aided manufacturing. Progress curves are not really complicated and the benefits derived from their use in planning and measuring are invaluable.

Specific points have been made, here and there, that I think computer aided manufacturing is a desirable direction to go. I have also tried to make the point that you need to beware of over-extending the use of computerized automation. It's quite easy to wind up with computerized trivia. Especially if your manual system wasn't effective to start with. I believe in letting the computer only help to make the decisions.

Computer automation of all the tasks and activities described in this article is feasible. I have written some of the programs I think are needed. Utility versions have been included with this article as examples. A complete small business CAM system is the intended end result. Detailed expansion of each section will include these programs as part of future articles on Computer Aided Manufacturing. □

Creative Computing can help you select your next computer and get the most out of it.

What are you looking for in your next computer system?

Most people say, "more memory, more speed, more disk capacity, higher resolution and better software." We disagree. In fact, we don't really think you should buy a computer system any differently than you buy a TV set.

When you buy a TV set you're really buying family entertainment — golf matches and football games, soap operas and movies, news and drama, Mork and Mindy. Aren't you doing the same thing when you buy a computer? Aren't you buying simulations and games, data analysis and word processing, graphics and music synthesis and some dreams of new applications?

Unbiased, in-depth evaluations

In the not-too-distant future you will be able to buy dedicated micros for hundreds of different applications. These devices probably won't even be called computers. Today, however, putting together a system is pretty much up to you. But maybe we can help.

At Creative Computing, we obtain new computer systems, peripherals, and software as soon as they are announced. We put them through their paces in our Software Development Center and also in the environment for which they are intended — home, business, laboratory, or school. We published the first in-depth evaluations of the Texas Instruments 99/4, Radio Shack TRS-80, Ohio Scientific Challenger, Exidy Sorcerer, Apple II disk system, Heath H-8, and APF PeGos I.

When we say unbiased reviews we mean it. More than once, our honesty has cost us an advertiser — temporarily. But we feel that our first obligation is to our readers and that editorial excellence and integrity are our highest goals.



The TI-99/4 has excellent color graphics and costs \$1150 including color TV monitor.

Sorting: A Key Technique

While evaluations are important, the main focus of Creative Computing magazine is computer applications of all kinds. Many of these require that data be retrieved or sorted. Unfortunately, most programming texts focus on the bubble

sort (or straight insertion) and, very infrequently, another technique (usually delayed replacement) and let it go at that.

Yet, except for comparison counting, the bubble sort is the least efficient. Tutorials and articles in Creative Computing demonstrate that the Shell-Metzner and Heapsort are from 50 to 13,000 times as fast as the bubble sort! Consider a sort of 100,000 items on a DEC System 10:

Bubble sort	7.1 days
Delayed replacement	3.8 days
Heapsort	17.3 minutes
Shell-Metzner	15.0 minutes

Needless to say, on a microcomputer, a bubble sort of even 1000 items is agonizingly long.

Free Sorting and Shuffling Reprint

Because sorting and shuffling (mixing a list of items) is so vital in most programming, we are making available a 20-page reprint booklet on Sorting, Shuffling and File Structures along with our May 1979 issue which has several articles on writing user-oriented programs and making the most of available memory space. The reprint booklet and issue are free with 12-issue or longer subscriptions.

Word Processing: For Home or Business

Word processing is one of the most talked-about small computer applications, but what does this really mean? Four primary areas are served by an effective word processing system: 1) data or text entry, 2) data storage and file manipulation, 3) text editing and 4) formatting, printing and reporting. In our evaluations at Creative Computing, we found that the twelve widely-available micro-based systems vary widely in their capabilities.

We have prepared a 20-page reprint booklet which we will send free to new subscribers along with the sorting booklet. Between it and the free May issue, eleven micro-based word processing systems are discussed along with points to consider when purchasing such a system.

At Creative Computing, we believe that computers can be of benefit to virtually every intelligent person in the



Free reprint booklet and issue with a new subscription to Creative Computing.



Contributing editor Ted Nelson (L) is author of "Computer Lib/Dream Machines." Publisher David Ahl (R) is a pioneer in computer models, simulations and games.

country. We do not believe that the "Computer priesthood" should confuse and bully the public. As Ted Nelson stated in the Computer Lib Pledge, we do not treat any question as a dumb question, since there is no such thing. We are against computer terms or systems that are oppressive, insulting or unkind, and we are doing the best we can to improve or replace such terminology or systems. We are committed to doing all we can to further human understanding and make computers easy to understand, interactive wherever possible, and fun for the user. The complete Computer Lib Pledge is contained in our May 1979 issue which we are furnishing free to new subscribers.

Computer literacy to everyone

The Creative Computing Software Division is participating with Children's Television Workshop in an important new venture, Sesame Place. These theme parks are being designed to bring interactive computer games and simulations to young children (and their parents) and remove the mystique of computers from the youngest segment of our population. In addition, we are participating in projects with several school systems and museums to write reading comprehension and ecology simulations software. We are also involved in a major college-level computer literacy project.

As a subscriber to Creative Computing, you will benefit from all of these activities. Creative Computing is the Number 1 software and applications magazine. Subscribe today — 12 issues for \$15 (\$9 saving over the newsstand price). Or, beat inflation and get 36 issues for just \$40. Money back if you're not satisfied. Send payment or Visa, Master Charge or American Express number to:

Creative Computing
P.O. Box 789-M
Morristown, NJ 07960

Save time, and call your order toll-free to:
800-631-8112

(In NJ call 201-540-0445)

creative computing

Car Pooling and Personal Computers

John Craig



Several years ago I was asked if I would be interested in joining a car pool. I rejected the idea because I liked the "freedom" of having my own car available during the day. I've changed my mind since then. Several years ago we weren't paying a ridiculous \$1.00, and more, for a gallon of gasoline. Furthermore, the "freedom" and convenience of having a car parked outside each day while I'm working is something I can learn to live without. The day of the car pool has arrived...and we, the personal computing community, can help make it a reality. It makes sense as far as inflation and those absurd gas prices are concerned (i.e., *saving money*), in making a real contribution toward energy conservation and reducing air pollution.

How to pick up intelligent friends.

President Carter made an urgent plea in a recent speech for all Americans to pull together and work toward making our country energy self-sufficient. Whether or not you like Carter isn't very important. Without a doubt, what he said is true... we do have to start pulling together and get things *moving*.

There are tens of thousands of personal computer systems in small and medium-sized towns around the country which could be used for establishing car pools. Through



Stan Broadway, WNCI's News Director, operating the WNCI/Radio Shack Car Pool System.

pleading, coercion and monetary inducements I'm hoping I can get enough owners of those systems interested in this idea to make a significant dent in the problem of energy conservation. It's all very possible, and I'd like to share some ideas on how we can do it. I must admit, however, there is a secondary, ulterior motive for wanting to get personal systems involved in this problem. We can get some good press out of it. The newspapers in all of those small and medium-sized towns will probably help with the effort but in addition will give some good media exposure to personal computing. Eventually the wire services and national magazines will pick up the stories, too. I want to see us do what we can to help with the energy problem but I also want to see personal computing grow and prosper. This kind of exposure can only help meet that end.

Commuter Computer

This idea resulted from a trip I made to Los Angeles recently to do a story on a non-profit corporation called Commuter Computer. The organization was formed during the energy crisis of 1973 under the concept of a regional car pooling system supported by government and private industry. They offer, free of charge, ride-matching services to all residents of the five counties of Los

Angeles, Orange, Ventura, San Bernardino and Riverside. They currently have 5.6 million people registered with the system.

I visited the Ventura County offices of Commuter Computer and spoke with Tricia Price, the branch manager. She said the entire project was financed primarily by the California Department of Transportation (CALTRANS). Additional funding is provided by the five county governments from their Federal Aid to Urban Highway Projects funds (FAU), the City of Los Angeles, Southern California Association of Governments, ARCO, Security Pacific bank and others. The annual funding comes to approximately \$1.5 million.

When asked what kind of computer was used for the system she replied that she didn't have any idea. She said the Los Angeles City computer serves the system and Commuter Computer is provided free processing time and keypunching. Registration information phoned into the five county branch offices is transferred to a form, shown in Figure 1, which is then forwarded to the LA City computer. Figure 2 is the ride matching information mailed to registrants.

Commuter Computer in Los Angeles is just one of many rideshare systems which have been established in major metropolitan areas around the country. It's obvious from the numbers that big cities are best left to the big systems and large organizations. I hope to make it just as obvious that small communities can be taken care of by microcomputer-based car pooling systems.

Some Of The First Steps

In January of 1979 there was a fire in the Bay Area Rapid Transit (BART) tube which goes under San Francisco Bay. The fire shut down BART, a

COMMUTER RIDESHARING REGISTRATION

If you have recently registered for ridesharing through your employer's ridesharing program, do **NOT** complete this registration—pass it along to a family member or friend!

You No.

Please print all information. Use only one entry per box. Abbreviate where necessary. Be specific in home and work address. Example: 744 S Street (St.), Road (Rd.), Avenue (Ave.), etc. Provide apartment (Ap) number where applicable.

NAME: Last Name First Name

HOME ADDRESS: Number and Street City Zip Code

Main street or boulevard intersection nearest your home. (Example: Wilshire Blvd. at La Cienega Blvd.)

☐ Check here only if you do not want your home address printed on this mailing material.

WORK ADDRESS: Company Name Work Address: Number and Street City Zip Code

Main street or boulevard intersection nearest your work. (Example: Hollywood Blvd. at Olive St.)

NORMAL WORK HOURS: Mon. - Fri. Sat. Sun. Start Time End Time

PHONE NUMBER: Home or work number where you may be reached. (Area Code) (Prefix) (Main Line) (Circle code) Phone Number Extension (if Any)

RIDESHARING: How do you usually travel to work? Check only one.

☐ Auto Driving Alone ☐ Auto Carpool ☐ Public Bus ☐ Motorcycle

☐ Commuter Van ☐ Commuter Bike ☐ Other _____

SIGNATURE: Write Date and send

DATE:

COMPANY USE ONLY: Received By Date

POSTAGE: \$0.12 \$0.24 \$0.36 \$0.48 \$0.60 \$0.72 \$0.84 \$0.96 \$1.08 \$1.20 \$1.32 \$1.44 \$1.56 \$1.68 \$1.80 \$1.92 \$2.04 \$2.16 \$2.28 \$2.40 \$2.52 \$2.64 \$2.76 \$2.88 \$3.00 \$3.12 \$3.24 \$3.36 \$3.48 \$3.60 \$3.72 \$3.84 \$3.96 \$4.08 \$4.20 \$4.32 \$4.44 \$4.56 \$4.68 \$4.80 \$4.92 \$5.04 \$5.16 \$5.28 \$5.40 \$5.52 \$5.64 \$5.76 \$5.88 \$6.00 \$6.12 \$6.24 \$6.36 \$6.48 \$6.60 \$6.72 \$6.84 \$6.96 \$7.08 \$7.20 \$7.32 \$7.44 \$7.56 \$7.68 \$7.80 \$7.92 \$8.04 \$8.16 \$8.28 \$8.40 \$8.52 \$8.64 \$8.76 \$8.88 \$9.00 \$9.12 \$9.24 \$9.36 \$9.48 \$9.60 \$9.72 \$9.84 \$9.96 \$10.08 \$10.20 \$10.32 \$10.44 \$10.56 \$10.68 \$10.80 \$10.92 \$11.04 \$11.16 \$11.28 \$11.40 \$11.52 \$11.64 \$11.76 \$11.88 \$12.00 \$12.12 \$12.24 \$12.36 \$12.48 \$12.60 \$12.72 \$12.84 \$12.96 \$13.08 \$13.20 \$13.32 \$13.44 \$13.56 \$13.68 \$13.80 \$13.92 \$14.04 \$14.16 \$14.28 \$14.40 \$14.52 \$14.64 \$14.76 \$14.88 \$15.00 \$15.12 \$15.24 \$15.36 \$15.48 \$15.60 \$15.72 \$15.84 \$15.96 \$16.08 \$16.20 \$16.32 \$16.44 \$16.56 \$16.68 \$16.80 \$16.92 \$17.04 \$17.16 \$17.28 \$17.40 \$17.52 \$17.64 \$17.76 \$17.88 \$18.00 \$18.12 \$18.24 \$18.36 \$18.48 \$18.60 \$18.72 \$18.84 \$18.96 \$19.08 \$19.20 \$19.32 \$19.44 \$19.56 \$19.68 \$19.80 \$19.92 \$20.04 \$20.16 \$20.28 \$20.40 \$20.52 \$20.64 \$20.76 \$20.88 \$21.00 \$21.12 \$21.24 \$21.36 \$21.48 \$21.60 \$21.72 \$21.84 \$21.96 \$22.08 \$22.20 \$22.32 \$22.44 \$22.56 \$22.68 \$22.80 \$22.92 \$23.04 \$23.16 \$23.28 \$23.40 \$23.52 \$23.64 \$23.76 \$23.88 \$24.00 \$24.12 \$24.24 \$24.36 \$24.48 \$24.60 \$24.72 \$24.84 \$24.96 \$25.08 \$25.20 \$25.32 \$25.44 \$25.56 \$25.68 \$25.80 \$25.92 \$26.04 \$26.16 \$26.28 \$26.40 \$26.52 \$26.64 \$26.76 \$26.88 \$27.00 \$27.12 \$27.24 \$27.36 \$27.48 \$27.60 \$27.72 \$27.84 \$27.96 \$28.08 \$28.20 \$28.32 \$28.44 \$28.56 \$28.68 \$28.80 \$28.92 \$29.04 \$29.16 \$29.28 \$29.40 \$29.52 \$29.64 \$29.76 \$29.88 \$30.00 \$30.12 \$30.24 \$30.36 \$30.48 \$30.60 \$30.72 \$30.84 \$30.96 \$31.08 \$31.20 \$31.32 \$31.44 \$31.56 \$31.68 \$31.80 \$31.92 \$32.04 \$32.16 \$32.28 \$32.40 \$32.52 \$32.64 \$32.76 \$32.88 \$33.00 \$33.12 \$33.24 \$33.36 \$33.48 \$33.60 \$33.72 \$33.84 \$33.96 \$34.08 \$34.20 \$34.32 \$34.44 \$34.56 \$34.68 \$34.80 \$34.92 \$35.04 \$35.16 \$35.28 \$35.40 \$35.52 \$35.64 \$35.76 \$35.88 \$36.00 \$36.12 \$36.24 \$36.36 \$36.48 \$36.60 \$36.72 \$36.84 \$36.96 \$37.08 \$37.20 \$37.32 \$37.44 \$37.56 \$37.68 \$37.80 \$37.92 \$38.04 \$38.16 \$38.28 \$38.40 \$38.52 \$38.64 \$38.76 \$38.88 \$39.00 \$39.12 \$39.24 \$39.36 \$39.48 \$39.60 \$39.72 \$39.84 \$39.96 \$40.08 \$40.20 \$40.32 \$40.44 \$40.56 \$40.68 \$40.80 \$40.92 \$41.04 \$41.16 \$41.28 \$41.40 \$41.52 \$41.64 \$41.76 \$41.88 \$42.00 \$42.12 \$42.24 \$42.36 \$42.48 \$42.60 \$42.72 \$42.84 \$42.96 \$43.08 \$43.20 \$43.32 \$43.44 \$43.56 \$43.68 \$43.80 \$43.92 \$44.04 \$44.16 \$44.28 \$44.40 \$44.52 \$44.64 \$44.76 \$44.88 \$45.00 \$45.12 \$45.24 \$45.36 \$45.48 \$45.60 \$45.72 \$45.84 \$45.96 \$46.08 \$46.20 \$46.32 \$46.44 \$46.56 \$46.68 \$46.80 \$46.92 \$47.04 \$47.16 \$47.28 \$47.40 \$47.52 \$47.64 \$47.76 \$47.88 \$48.00 \$48.12 \$48.24 \$48.36 \$48.48 \$48.60 \$48.72 \$48.84 \$48.96 \$49.08 \$49.20 \$49.32 \$49.44 \$49.56 \$49.68 \$49.80 \$49.92 \$50.04 \$50.16 \$50.28 \$50.40 \$50.52 \$50.64 \$50.76 \$50.88 \$51.00 \$51.12 \$51.24 \$51.36 \$51.48 \$51.60 \$51.72 \$51.84 \$51.96 \$52.08 \$52.20 \$52.32 \$52.44 \$52.56 \$52.68 \$52.80 \$52.92 \$53.04 \$53.16 \$53.28 \$53.40 \$53.52 \$53.64 \$53.76 \$53.88 \$54.00 \$54.12 \$54.24 \$54.36 \$54.48 \$54.60 \$54.72 \$54.84 \$54.96 \$55.08 \$55.20 \$55.32 \$55.44 \$55.56 \$55.68 \$55.80 \$55.92 \$56.04 \$56.16 \$56.28 \$56.40 \$56.52 \$56.64 \$56.76 \$56.88 \$57.00 \$57.12 \$57.24 \$57.36 \$57.48 \$57.60 \$57.72 \$57.84 \$57.96 \$58.08 \$58.20 \$58.32 \$58.44 \$58.56 \$58.68 \$58.80 \$58.92 \$59.04 \$59.16 \$59.28 \$59.40 \$59.52 \$59.64 \$59.76 \$59.88 \$60.00 \$60.12 \$60.24 \$60.36 \$60.48 \$60.60 \$60.72 \$60.84 \$60.96 \$61.08 \$61.20 \$61.32 \$61.44 \$61.56 \$61.68 \$61.80 \$61.92 \$62.04 \$62.16 \$62.28 \$62.40 \$62.52 \$62.64 \$62.76 \$62.88 \$63.00 \$63.12 \$63.24 \$63.36 \$63.48 \$63.60 \$63.72 \$63.84 \$63.96 \$64.08 \$64.20 \$64.32 \$64.44 \$64.56 \$64.68 \$64.80 \$64.92 \$65.04 \$65.16 \$65.28 \$65.40 \$65.52 \$65.64 \$65.76 \$65.88 \$66.00 \$66.12 \$66.24 \$66.36 \$66.48 \$66.60 \$66.72 \$66.84 \$66.96 \$67.08 \$67.20 \$67.32 \$67.44 \$67.56 \$67.68 \$67.80 \$67.92 \$68.04 \$68.16 \$68.28 \$68.40 \$68.52 \$68.64 \$68.76 \$68.88 \$69.00 \$69.12 \$69.24 \$69.36 \$69.48 \$69.60 \$69.72 \$69.84 \$69.96 \$70.08 \$70.20 \$70.32 \$70.44 \$70.56 \$70.68 \$70.80 \$70.92 \$71.04 \$71.16 \$71.28 \$71.40 \$71.52 \$71.64 \$71.76 \$71.88 \$72.00 \$72.12 \$72.24 \$72.36 \$72.48 \$72.60 \$72.72 \$72.84 \$72.96 \$73.08 \$73.20 \$73.32 \$73.44 \$73.56 \$73.68 \$73.80 \$73.92 \$74.04 \$74.16 \$74.28 \$74.40 \$74

Figure 1

trants were able to get immediate feedback. After entry of their data into the computer it printed a list of other people from their area who were interested in car pooling. The program was improved to provide more accurate information to each person by using a sort of phone prefixes within zip code areas.

This free community service was quite rewarding for the folks at Computerland. They managed to get several hundred people together for car pooling and their enthusiasm was further rewarded by getting some good publicity. The Oakland Tribune did a story on their efforts and Chuck Orr was interviewed for three television news spots, one radio news show and was on a morning radio talk show.

Computer, called RIDES, which is better equipped to handle the growing data base the store was faced with. The Apple system was using a data base program from the local Apple user's group which was limited to only about 500 entries because of a RAM-resident sorting technique. Needless to say, that wouldn't be adequate for most of the applications we'll be considering.



When transportation workers went on strike against the Central Ohio Transit Authority earlier this year approximately 30,000 customers found themselves stranded. Radio station WNCI launched a ridesharing program to get people with cars together with those who normally used the transit system. Stan Broadway, WNCI's News Director, realized after 24 hours that the pencil and paper method of keeping track of people calling in wasn't going to work. He called the local Radio Shack store and manager William Louden loaned them a dual disk TRS-80 with a modified customer mailing list program to put the car pool program into operation. The program did a home zip code to work zip code search and matched up people according to their working hours. Everything was done over the phone. Questionnaires weren't sent out to participants nor were lists of the people from their areas. The



Car Pooling, con't...

--- COMMUTER COMPUTER CARPOOL LIST ---

8008001-112
11/11/74

EMPLOYER ID: 11623
MAIL LOC.: 1769

KNOUSE CHARLES WORK ADDRESS: 100 TEMPLE ST HOME MAP SQUARE: 55-145
 * 716 CHELSEA RD WORK HOURS: 8:00AM - 4:30PM WORK MAP SQUARE: 45-151
 REDONDO BCH CA 90287 PHONE: (213) 378-8652 X Home CAR AVAILABLE: YES

NAME	HOME ADDRESS	WORK ADDRESS	WORK HOURS	CAR AVAILABLE	PHONE	LOC/E)
FROM YOUR HOME MAP SQUARE:						
FISHER	RONALD J 4136 ANDREWS PL	100 TEMPLE ST	8:00- 4:30	NO	(213) 860-4545	HOME
GLOVER	MARY	155 N LOS ANGELES ST	8:30- 5:00	NO	(213) 482-6895	HOME
GLORIA	LARRY 14123 SEPULVEDA BLVD	155 N LOS ANGELES ST	8:30- 5:00	NO	(213) 376-8952	HOME
GNANN	WAYNE	155 N LOS ANGELES ST	8:30- 5:00	NO	(213) 482-5339	HOME
FROM OTHER MAP SQUARES NEAR YOUR YOUR HOME:						
OREAR	ROBERT	100 TEMPLE ST	8:00- 4:30	YES	(213) 860-3435	HOME
KNIGHT	DAVID	135 THIRD ST	7:45- 4:15	YES	(213) 378-9895	HOME
FLEER	LILLIAN 3323 W ARTESIA BLVD	300 BROADWAY	8:00- 4:30	YES	(213) 456-8877	HOME
SIMPSON	ARTHER 215 S LUCIA AV	200 N SPRING ST	8:00- 4:30	YES	(213) 485-3325	HOME
KNOX	JOHN 2911 GIBSON PL	300 BROADWAY	8:00- 4:30	YES	(213) 456-9873	HOME
KNOWLES	SIDNEY 822 W 173 ST	220 TEMPLE ST	8:00- 4:30	YES	(213) 456-2323	HOME
FLORES	GLORIA 1614 GOODMAN AV	100 TEMPLE ST	8:00- 4:30	YES	(213) 532-6161	HOME
KNAPP	RICHARD	220 TEMPLE ST	8:00- 4:30		(213) 532-1092	HOME
BUCK	MARTHA 525 SAPPHIRE AV	200 N SPRING	8:00- 4:30	YES	(213) 378-6648	HOME
KNUDSEN	TERRY 532 HELBERTA AVE	125 TEMPLE ST	8:20- 4:45	NO	(213) 620-1970	554
SIGNER	A J 802 S CATALINA AV	155 N LOS ANGELES ST	8:30- 5:00	YES	(213) 482-5522	145
BUNYARD	JIM 649 26TH ST	155 N LOS ANGELES ST	8:30- 5:00	NO	(213) 482-6666	HOME
KNOTTS	ROSEMARY	155 N LOS ANGELES ST	8:30- 5:00	NO	(213) 482-7538	HOME
MARTINO	LARRY	200 N SPRING ST	8:00- 4:30	YES	(213) 485-5028	HOME
GLASS	CHARLENE 87214 PICO BLVD	200 N SPRING ST	8:00- 4:30	NO	(213) 482-9310	HOME
GLOYNE	ELVIN 1512 MONTEREY BLVD	200 N SPRING ST	8:00- 4:30	YES	(213) 485-2323	HOME
GLISTER	JOSEPH 5421 VICTOR DR	250 MAIN ST	8:00- 4:30	YES	(213) 456-1237	HOME
STENEN	SHARON L 703 E ARLINGTON AVE	200 N SPRING ST	8:00- 4:30	NO	(213) 456-8873	928
GLEED	ROBERT 7852 N OAK RD	300 BROADWAY	8:00- 4:30		(213) 372-5258	HOME
GLOWA	DONALD	125 TEMPLE ST	8:20- 4:45	NO	(213) 620-8585	HOME
GLEASON	SUSAN 5542 N SANDS DR	125 TEMPLE ST	8:20- 4:45	YES	(213) 620-7889	HOME

* AT YOUR REQUEST, YOUR HOME ADDRESS DOES NOT APPEAR ON THE MATCH LISTS OF OTHERS.
--- SEE OTHER SIDE FOR ADDITIONAL INFORMATION AND INSTRUCTIONS ---

INSTRUCTIONS AND INFORMATION

FORMING A CARPOOL

The information on your list is provided to help you form a carpool. It is up to you and the others on your list to make carpool arrangements. Here is how you might use this information in setting up or adding to your carpool.

- Examine your list and identify those who would be the best auto-mates for you. Check home address, work address and work hours. Even though the hours listed may be slightly different than yours, adjustments in scheduling may make carpooling more convenient.
- Call potential auto-mates. Check to see if the phone number is a home or work phone and call at an appropriate time.
- Make specific arrangements: who will drive and what days, where you will meet, time of departure, and expenses to be shared.
- Agree on: what will happen if someone is late, what should be done in case of illness or change of plans.
- Discuss other considerations: the type of car, the route to be traveled, adequacy of insurance coverage and personal preferences such as smoking, type of music, etc.
- Save your list for future reference. You may want to add others to your carpool in the future. Also, you can use the top portion of this list to make deletions, request new lists and to make corrections.

REMEMBER those on this list are also interested in forming a carpool. So go to it. JOIN A "76 POOL"!

DELETIONS

If you wish your name to be removed from the carpool data file, check the appropriate box above, detach the upper portion of this page and mail it to Commuter Computer.

NEW LIST REQUESTS

If you feel that the match list from your initial request is not satisfactory, and you would like to re-apply, do not fill out a new application form, but check the appropriate box above, detach, and mail to Commuter Computer. A second list will be sent to you, which might contain additional names not available when your first request was answered. Your request for a second list should not be made immediately after receiving the first list, because time will be needed to get other people into the system. Thus, you should wait at least a month before submitting a new request.

CORRECTIONS AND REVISIONS

The people on your list were matched with you using the information you provided. If the matching information is incorrect, or you wish to change some of the data, check the appropriate box above, and make the change directly on the reverse side by crossing out the incorrect information and printing the correct data. Detach the upper portion and mail it to Commuter Computer.

INSURANCE COVERAGE

Please check with your individual insurance agent to see if you are adequately covered for carpooling and if your insurance coverage will be affected in any way as a result of carpooling.

Figure 2

Car Pooling, con't...

system was capable of handling approximately 600 entries.

With the settlement of the strike the system was eventually retired but the success of the program has encouraged the city of Columbus to set up a permanent car pool system to help in conservation and traffic reduction. An interesting side note is that Bill Loudon has received requests for copies of the program from several sources, including the Michigan Transportation Authority, who wanted to adapt it to a larger system. The idea of someone actually doing that seems farfetched but it does indicate a real interest exists.

Population and Area Considerations

I only wish that I had had a car pool system in operation for a period of time and could relate the actual problems encountered in setting one up. Unfortunately, that's not the case. I have, however, put together some examples (using a dummy data base) which should provide some ideas on how to attack the project.

Our primary "model" will be based on a section of the Central California

Coast consisting of the cities of Santa Barbara, Solvang, Lompoc, Vandenberg AFB and Santa Maria. We'll assume the system is somewhat centrally located, in the town of Lompoc (population 25,000). Figure 3 is a diagram of the cities illustrating the possible "commuting paths."

Lompoc is a city with two or three industries which attract few people from other cities. Most of the people working for those companies live in Lompoc. A large number of people from Lompoc work at Vandenberg Air Force Base which is 15 miles away. There are also a couple of hundred people from Lompoc who work at the Federal Correctional Institution (FCI). Several companies in Santa Maria, Solvang and Santa Barbara also attract people from Lompoc. The path between Lompoc and Santa Maria (30 miles) is bi-directional but is pretty much one way from Lompoc to Santa Barbara (50 miles). This is because the cost of living and housing is so expensive in the Santa Barbara area that many people live in Lompoc, which is somewhat lower, and commute. These people are prime candidates for car pooling. Santa Barbara also attracts people from Santa Maria and the town of Solvang. Solvang is a


Danish "tourist" community, also with a high cost of living, and many people working in the stores and shops come from Lompoc and Santa Maria. Some of the people living there commute to Lompoc, Santa Maria and Santa Barbara for work.



There we have a simplified look at the demographics of the area. You should start thinking about the same things with regard to your community and neighboring towns. The next step is to get a map of the area and break it up into grids. The map in Figure 4 has the area broken up into 21 sections (A thru U). This is fine for getting the "big picture" but maps of the individual towns will be needed to identify exactly where people live and provide identification of boundary lines. It's important to break each community out in a grid by itself so that one area, or grid, doesn't try to encompass too large a population.

Perhaps your reaction, after looking at Figure 4, is that the area and population is too great for a floppy disk-based micro to handle? I don't think so. Keep in mind that many of the small communities being served are in fact fairly small communities. According to Commuter Computer,

Figure 3

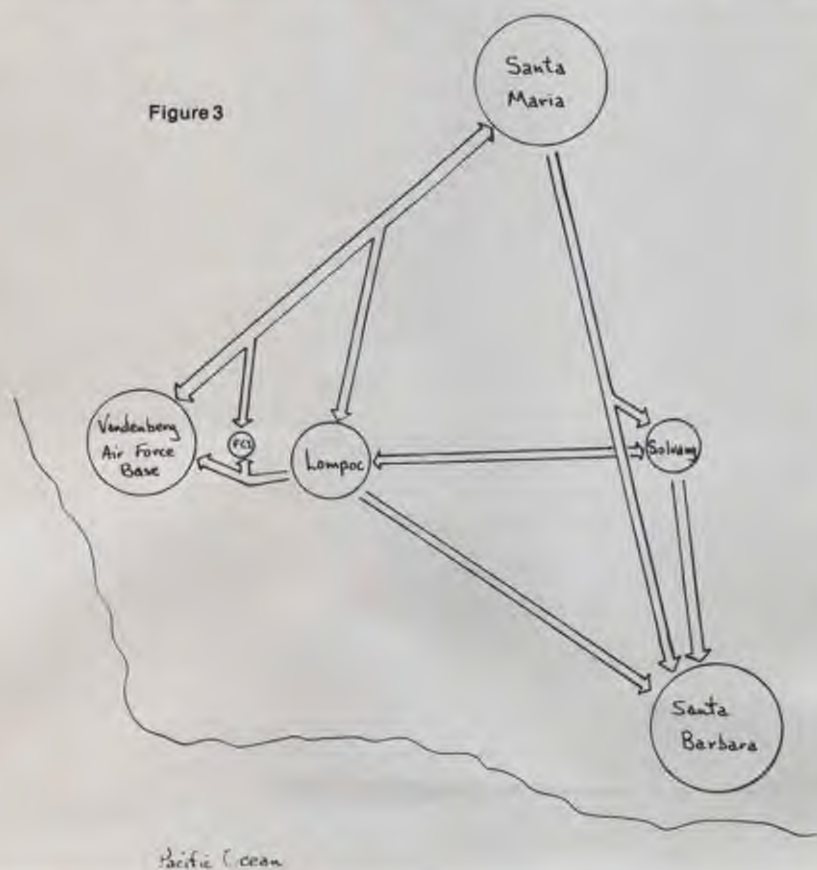

CARPOOL INFO



CALL (805) 647-RIDE

Car Pooling, con't...

the percentage of a community's population which registers for a program such as this is usually difficult to determine. Some cities might have as much as 70% of the population commuting each day and others might have 70% of the population working in that city. However, for our purposes we need to come up with some kind of "guesstimate" so we'll have an idea of whether we're getting in over our heads or not. With that in mind, let's assume that 10% of the total population will register for the system (and as gas availability decreases, that percentage increases). The folks at Commuter Computer told me that was a realistic figure for the

As an example of a much smaller "model" let's consider the small town of Tularosa in southern New Mexico. Tularosa has a population of 3,500. Many of its residents work in neighboring Alamogordo, a distance of 12 miles. Some drive up into the mountains to work at the race track and other industries in the city of Ruidoso. Others commute to Holloman Air Force Base and White Sands Proving Grounds (40 to 50 miles). A very small system could handle the task if only 350 residents (10%) of that sleepy little town registered for car pooling...and there would still be a lot of gasoline saved each day. With these samples in mind, let's take a look at some of the data requirements and the kind of software needed for the job.

JOIN THE GASPAYERS' REVOLT

maximum estimate. The total population of the area we've been discussing is approximately 101,500 (which doesn't include Santa Barbara since most of the commuting will be into that city). This means we can expect a maximum of approximately 10,150 people to register for the program.

System Requirements


Without a doubt, the system must have a minimum of dual floppy disks or high-speed cassettes for external mass storage. For some applications a mini-disk system will be adequate. Others will require a standard 8" disk

system. Going beyond that we have double-density, quad and perhaps even hard disk systems.

Before we get into the various storage systems, and their capacities, we should define the data we'll be dealing with. The heart of this whole system, particularly because it's micro-based, is going to be the mass storage. People aren't going to take this idea seriously unless we can come up with some sound figures on just what a micro system can do. And, as we'll see, convincing "them" will become important when it comes time to try to obtain financing. Because most floppy disk systems are relatively low in capacity (relative to hard disk systems) it's important that we define our data in a frugal and miserly fashion...with the objective of getting as many records as possible onto a diskette (one record being all the data from one registrant).

The big systems, such as Commuter Computer, aren't as concerned with storage requirements as we are and as a result are able to offer their "customers" more than we can. Our objective should be to come up with the least number of characters possible for a single record. With that in mind, refer to Table 1 and we'll see what can be included...and what can be left out.

Table 1 defines the fields for a complete record, with the objective of coming up with a maximum length of 64 characters. There were a couple of things which had to be deleted in order to meet that objective. The home address and major intersections near the registrant's home along with the work address were the main things to go. A person signing up for the ride matching service is primarily interested in getting phone numbers of other people in her area. Most of the coordination is done over the phone...and there's no reason why the party at the other end can't provide a home and work address.

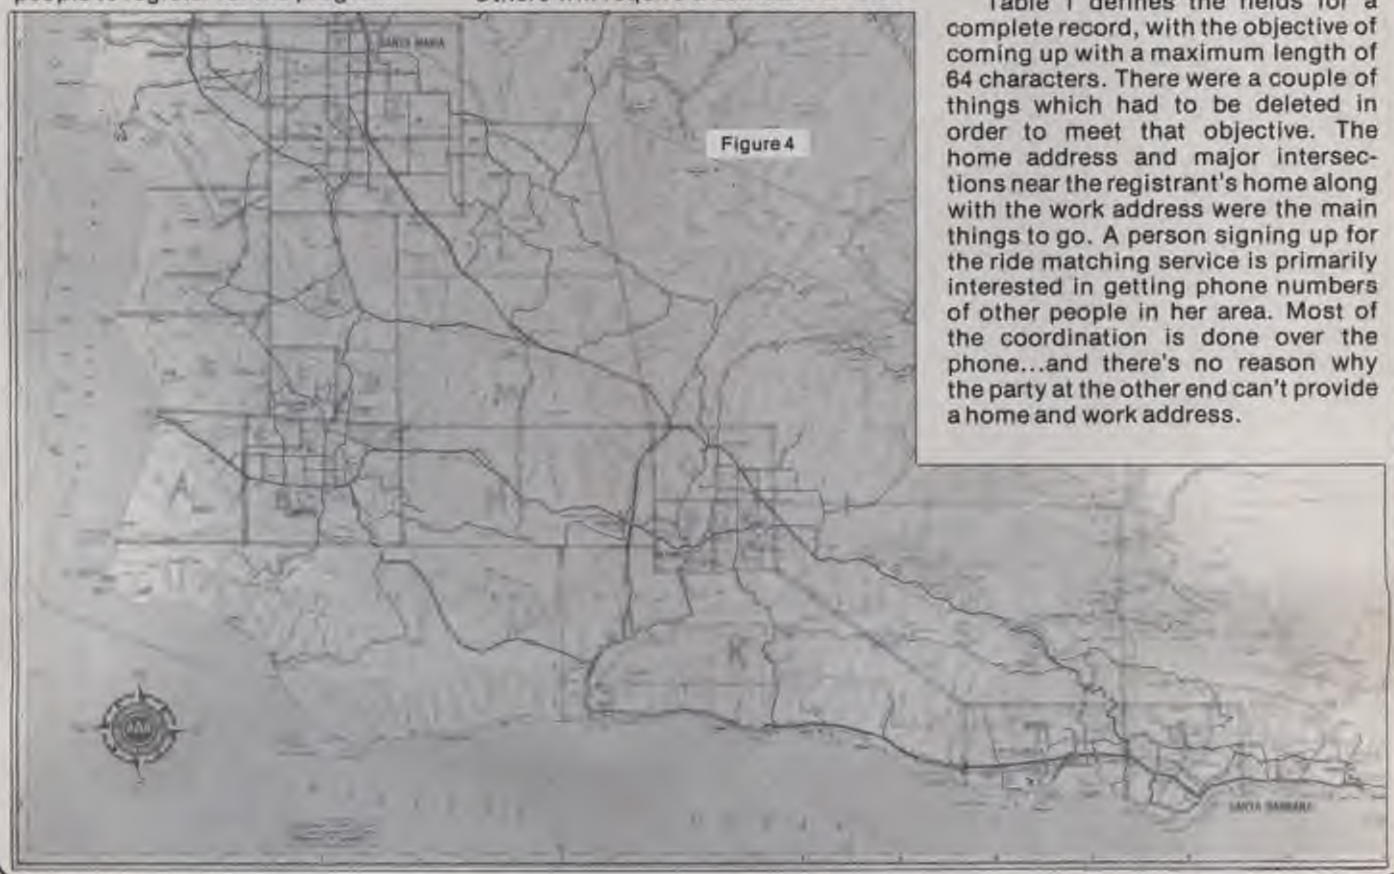

Car Pooling, con't...

Field	Number of Characters
Last Name.....	17
First Name.....	11
Phone Number.....	10
Home or Work Phone?.....	1
Work Starting Hour.....	4
Work Ending Hour.....	4
Days of Week.....	1
Category (Drive, Share, Ride).....	1
Home Map Grid.....	1
Work Map Grid.....	1
Field & Record Separators.....	11
Total Characters	62

Table 1. Field lengths and specifications for a 64-character car pool registrant record.

17 and 11 characters for last and first names, respectively, are more than adequate. Inclusion of the area code in the phone number would be advisable since some places border on two different codes. The program could convert the work starting and ending hours to military time, saving two bytes to specify AM or PM. The days of the week can be stored as a single, encoded byte. The home and work grids could be deleted and the person receiving the information would have to assume that the data dealt with someone from his area. However, the grids probably should be included as a good psychology measure. (It would be a good idea for the person to have a map, such as the one in Figure 4, to refer to when filling out the application form, and for later reference.) The field and record separators bring the total characters per record to 62.

Table 2 lists the storage capacities for various single-density mass storage systems available for personal computers. Using the 8" CP/M entry as an example, the figures were arrived at by multiplying the number of tracks by the number of sectors to obtain the total number of sectors. This was then multiplied by the number of data bytes (i.e., a formatted diskette) per sector to obtain the total bytes per media. The first drive usually contains the operating system, directory and the car pool program (arbitrarily set at 4K - either assembly language or BASIC) which are totalled up under "1st Drive Overhead." This overhead is then subtracted from the total capacity to yield the "1st Drive Capacity." That figure is added to the "2nd Drive Capacity"

to obtain the "Total Capacity." The total is then divided by 64 (the length, in bytes, for each record) to provide the "Total Number of Records." The various media have been listed in descending order and the Radio Shack TRS-80, partly because of its tremendous overhead, comes in last.

The purpose behind this exercise has been to provide data for determining the type of micro system, and mass storage, for different population level car pool systems. The 10% figure arrived at earlier for the California Central Coast area (10,150) would require that we look at a system capable of handling that amount of data...and provide for future expansion. An important point to keep in mind is the cost-effectiveness of adding a third, and some cases fourth, drive for increased storage. More importantly, however, is the absolute necessity for having a car pool program which allows for such expansion.

There are a number of systems on the market using the 8" version of CP/M (and also a few 5" mini versions). The Beta-1 and North Star disk drive can be adapted to several systems. The table isn't all-encompassing, especially since it doesn't include prices, but should serve as a guideline in system selection.

One of the objectives of this article is to call upon the readers of Creative Computing to develop car pool programs for various systems and submit them for publication. We would like to see as many systems established around the country as possible and sharing such programs



printout, which would be sent to an applicant, of some dummy data using the CP/M version of WHATSIT. The data is based on the California "model" discussed earlier and uses map grids from Figure 4. This particular data base wouldn't be the most efficient for most applications...but would certainly work for some. One of the biggest problems in implementing it would be the necessity for the operator to use great care in entering all of the information (the entries are lengthy). The overhead for the CP/M version is also fairly steep; 2 bytes for CR & LF for each 128 byte sector plus 18 bytes per entry for pointers along with a startup overhead of 4K on the 1st drive. On the other hand, WHATSIT uses variable length fields, rather than fixed, and is efficient in that respect. If you implement a car pool system using this data base, or something else, we'd like to hear about it.

Funding: The Unanswered Questions

My original idea was to appeal to schools, computer stores and individuals to form car pools with personal

How to get 80 miles per gallon.

through the pages of Creative will help accomplish that goal. Suggested specifications for the program are listed in Figure 5. A most important consideration is that the data entry portion of the program have a lot of human engineering and be very forgiving (which is actually important criteria for any program). The printout of data, shown in Figure 6, should also be easily read and understood by those using it.

There are some existing data base programs which could be adapted for this application. Figure 7 is a

computers as a public service. In some cases, that will be possible. However, a lot more people will get fired up about the project if they can receive funding for their efforts. (I'd really like to see "Grey Power" get involved in this. It seems that such a project would be quite interesting for retired and/or elderly persons in hospitals, homes and retirement hotels and communities.)

On the matter of funding we have a slight problem. If this was some kind of a welfare program we could very likely get funds from the federal and

Car Pooling, con't...

System	Tracks	Sectors	Data Bytes/ Sector	1st Drive Overhead	1st Drive Capacity	2nd Drive Capacity	Total Capacity	Total Number of Records
Beta-1 Hi-Speed Cassette (MECA)	2	1000	256	5,120	506,880	510,976	1,017,856	15,904
Radio Shack Model II	77	26	256	70,600	425,000	480,000	905,000	14,136 *
Micropolis Mod II	77	16	256	16,384	299,008	311,296	610,304	9,536
8" CP/M Ver 1.4	77	26	128	12,000	248,152	247,552	495,704	7,745
Commodore PET	670 Blocks		256	4,096	167,424	171,520	338,944	5,296
Compu-Think (PET)	40	16	256	8,192	155,648	159,744	315,392	4,926
Micropolis Mod I	35	16	256	16,384	126,976	135,264	262,240	4,097
Apple DOS 3.2	35	13	256	17,408	99,072	113,152	212,224	3,316
Heath CP/M (Lifeboat)	40	20	128	11,776	90,624	94,720	185,344	2,896
North Star Release 4	35	10	256	7,168	82,432	89,600	172,032	2,688
Heath HB HDOS	40	10	256	27,187	75,213	94,208	169,421	2,647
Radio Shack TRS-80 (DOS 2.2)	35	10	256	30,000	55,000	85,000	130,000	2,031

Notes:

1.) The Beta-1 requires 1,024 bytes for directory. Operating system is in EPROM. (Access time for this system is 34 seconds worst case and 10 seconds average.) Double density option available.

2.) 8" CP/M - Tracks 0 & 1 are reserved for DOS on all diskettes. Double and quad density versions available.

3.) North Star - DOS Release 4.0 occupies 3,072 bytes. Double and quad density versions available.

4.) Apple - Tracks 0, 1 and 2 are dedicated to the DOS and track 17, on all diskettes, is reserved for directory.

5.) Both the Compu-Think and Commodore systems have the operating system in PROM. The directory overhead has already been subtracted from the 670 blocks listed for the PET and 1 track is used for directory on the Compu-Think.

* 6.) TRS-80 - Model II is available only in double density version. The overhead for Model I and II is quite high because the BASIC and several utilities are included along with the DOS and the 4K car pool program. Rounded off figures were supplied by Radio Shack and have slight discrepancies.

7.) There are a number of systems with mini-disc drives available on the market which will have capacities similar to the other mini drives listed.

8.) REMEMBER: Capacity isn't everything. Some of the systems listed above are quite easy to use, both from the programmer and end-user standpoint, and some are very poor. In addition, some systems have much more software available than others.

Table 2. Data capacity for various single density personal computer mass storage systems. 1st drive will contain overhead, consisting of the DOS, directory and the car pool program (assumed to be 4K in all cases) with remainder allocated to data storage. 2nd drive for data storage only. Total number of records is based on 64-character records. All values are expressed in decimal. In most cases, double density and quad density values can be determined simply by multiplying the single density "Total Number of Records" figure. That approach is not always accurate, particularly with standard 8" CP/M systems, due to varying formats from one manufacturer to another and the lack of standards.

state governments without any problem. If it was to study a problem, rather than offer a solution, we could probably obtain funding, also. I've never had any dealings with the self-perpetuating bureaucracies of the federal government and after the experience of trying to get some answers to my questions on this matter, I'm not sure I'll ever want to again. In all fairness, I did run across some conscientious individuals on both the state and federal levels who were very helpful. Unfortunately, the people I thought could provide the

most help were the least helpful. For example, a Mr. Lew Pratsch, with the Department of Energy, is in charge of Car Pool and Van Pool Programs. I tried calling him several times... couldn't get a return call...and was finally told that he was "tied up with a project for the White House." His phone number is (202) 376-4436.

Things weren't much different with the Department of Transportation...which is where I was hoping to finally find some light at the end of the tunnel. The Department of Transportation, through the Federal High-

way Administration, has divided the country up into 10 regions. There are offices in major cities in each of those regions and district offices in each state capital. The counties and cities in each state which have populations exceeding 200,000 are required by the federal government to establish Metropolitan Planning Organizations (MPO). These MPO offices may be a starting point for us...I hope.

One of the major objectives of this article was to provide guidelines and exact procedures for going after funding for a car pool system. Unfor-

Car Pooling, con't...

```

What's it?
GRID 8 TO GRID 7
GRID 8 TO GRID 7: CARPOOLER: GEORGE THOMPSON
GRID 8 TO GRID 7: CARPOOLER: ALYCE BEEBE
GRID 8 TO GRID 7: CARPOOLER: HOWARD LUKK
GRID 8 TO GRID 7: CARPOOLER: PETE BICKERDIKE
GRID 8 TO GRID 7: CARPOOLER: DAVID BRYANT
That's all

What's it?
GEORGE THOMPSON
GEORGE THOMPSON: PREFERENCE: SHARE DRIVING
GEORGE THOMPSON: WORK ADDRESS: SAMTEC, BLDG 7000, WAFB 93437, PH 800-5444, HOURS: 8AM - 4:30PM.
GEORGE THOMPSON: ADDRESS: 817 N. F ST, LOMPOC 93436, PH 555-1000.
That's all

What's it?
ALYCE BEEBE
ALYCE BEEBE: ADDRESS: 4400 W. LEMON, LOMPOC 93436, PH 666-3424.
ALYCE BEEBE: WORK ADDRESS: FEC, 415 NEW MEXICO, WAFB 93437, PH 788-2000, HOURS: 8AM - 5PM.
ALYCE BEEBE: PREFERENCE: SHARE DRIVING
That's all

What's it?
HOWARD LUKK
HOWARD LUKK: ADDRESS: 3277 LOMPOC-CASHMIA ROAD, LOMPOC 93436, PH 333-7000.
HOWARD LUKK: WORK ADDRESS: BENDIX, BLDG 640, WAFB 93437, PH 455-1234, HOURS: 4PM - 12:01AM.
HOWARD LUKK: PREFERENCE: RIDE ONLY
That's all

What's it?
PETE BICKERDIKE
PETE BICKERDIKE: ADDRESS: 58 N. A ST, LOMPOC 93436, PH 554-7777
PETE BICKERDIKE: WORK ADDRESS: SAMTEC, BLDG 7000, WAFB 93437, PH 800-6666, HOURS: 8AM TO 4:30PM.
PETE BICKERDIKE: PREFERENCE: DRIVE ONLY
That's all

What's it?
DAVID BRYANT
DAVID BRYANT: ADDRESS: 666 S. FIR ST, LOMPOC 93436, PH 555-3333.
DAVID BRYANT: WORK ADDRESS: BOEING, BLDG 4500, WAFB 93437, PH 800-6777, HOURS: 8AM - 4:30PM.
DAVID BRYANT: PREFERENCE: SHARE DRIVING
That's all

```

Figure 7. Sample printout using dummy data and WHATSIT data base system.

Mass Disk & Tape Storage

S-100 BUS OWNERS

UNIVERSAL TAPE SYSTEM

DOUBLE DENSITY DISK SYSTEM

Over 200K bytes on one drive for under \$700, assembled only. Triple Drive available for 600K bytes.

Optional Software: CP/M*, FORTRAN, Microsoft Disk BASIC, BASIC-E.

Ask for details on our Double Density DELTA-1.



HIGH SPEED, DIRECT ACCESS TAPE SYSTEM

Over 1½ Meg Bytes on double Drive Tape System for under \$850. Get 3 Meg Bytes on our Quad Drive System.

Optional Software: Microsoft 8K and Extended BASIC, Electric Pencil, and Pro-Type.

Ask for details on ALPHA-1.

THE NEW BETA-1

For TRS-80*, Apple*, Sorcerer*, and more.



Priced at under \$400, assembled and tested. High Speed — Direct Access, 720K Bytes on standard unit. (1.4 Meg Bytes per drive as an option.) Quad Drive Units available.

BETA-1 plugs directly to a standard 8-bit parallel or an RS232 serial port. Contains its own 8035 microprocessor and on-board EPROM.

Write MECA for details.

*Manufacturers' registered trademarks.

meca

Dealer Inquiries Welcomed
7026 O.W.S. Road, Yucca Valley, California 92284
Telephone (714) 365-7686

Car Pooling, con't...

Data Entry

1. All entries should be preceded by self-explanatory prompting messages to minimize operator training and system documentation.

2. Program should have a menu for selecting the following operations:

- (1.) ADD NEW ENTRIES
- (2.) DELETE OLD ENTRIES
- (3.) CHANGE OLD ENTRIES
- (4.) SORT DATA
- (5.) SEARCH FOR MATCH
- (6.) PRINT RIDE-MATCHING INFO
- (7.) MAKE BACK-UP COPIES OF DISKETTES
- (8.) EXIT SYSTEM

3. Incorrect entries or failure to mount data disc should not cause system to crash. Error trapping techniques should be employed throughout.

4. Instructions for initializing system, sorting data, making backup copies of diskettes and performing orderly shutdown should be displayed on screen, whenever possible, and clearly described in user's manual.

Data Processing

1. Program should be designed for accepting data during the day, sorting the data at the

end of the day, then performing the necessary ride-matching searches followed by the generation of printouts to be mailed to applicants.

2. Searches should be from home grid to work grid and also search the grids passed through by the applicant going from home to work. Searches should also be performed in grids surrounding the applicant's home grid to provide an even higher number of potential matches.

3. It shouldn't be necessary to search for compatible work starting and ending hours since the person using the list will be able to eliminate those not matching.

4. System must be designed for expansion of external mass storage (i.e., adding additional drives).

Data Output

1. Optional vertical or horizontal output formats would be desirable so that standard 80-column printers can be used or inexpensive 40-column printers.

2. Data should be easily understood and accompanied by explanatory messages, if necessary.

And...it will undoubtedly be larger than 4K.

Figure 5

tunately, I haven't come close to meeting that objective. Several fruitless attempts have been made to get in touch with the people in the Department of Transportation who could provide that information. Once again, it's a matter of someone not being in (on several occasions), leaving a message...and never hearing from them. The completion of this article was held up for days on end while attempting to get that information. However, I do have some suggestions on who to contact on this matter. Needless to say, we would be very interested in hearing about your successes (and failures, if they're constructive).

Ms. Barbara Reichart is Chief of the Ride-Sharing Transportation Branch in the Federal Highway Administration (HHP-33, Washing-

ton, DC 20590). Her phone number is 202-426-0210. Another person in that office who might be of assistance is a Mr. Radman. They should be able to give you information regarding the Metropolitan Planning Organization in your area and, hopefully, the steps to take in applying for funding through the Department of Transportation. I don't honestly know if they'll be of any help because I was unable to get through to either of them (or they were unable to get through to me). Another avenue is going directly to the state level to see what is available there. There are also city and county governments which might be willing to fund such programs. Corporations and private institutions are other areas to explore. Many of the readers of Creative are knowledgeable about going after such funding. Hopefully, they'll share the tricks of the trade with the rest of us.

Summary

It's one thing to develop a program, but another matter to successfully market it. And, anyone applying for funding will sure have to demonstrate they can handle the promotion. The public can be made aware of this kind of program through newspaper ads, radio spots and high-

Patti Fortenbaugh

Home phone number is (805) 555-3434

Begins work at 8:00 AM

Ends work at 4:30 PM

Works M, T, W, TH, F

Drives

Home map grid is F

Work map grid is A

Figure 6. Sample printout of a single record of the car-matching data sent to people registering for car pool program (based upon data from Table 1).

way signs (which have been very successful). One of the most effective methods has been to enlist the aid of corporations and provide application forms for their employees to fill out. (Actually, there is probably a "market" for selling this idea to a company for in-house use.) There will be a lot of public relations and marketing involved in such a program; people need to be made aware of the advantages, need to overcome the fears associated with joining a car pool and much more. Different ads and radio spots should help accomplish that. Getting to know the demographics of the typical car pooler will be important and much of this information can be obtained from the larger, established systems (e.g., CarShare, in Houston, has found that almost 70% of the participants are female). The newspaper published by Commuter Computer in Los Angeles contains a wealth of ideas. Table 3 lists the addresses of three of the larger systems.



The price of gasoline won't be coming down. People are surely beginning to feel guilty about driving around in those 2-ton gas-eating monsters *by themselves*. Plus, they must be feeling pretty dumb spending all that money. We have the technology to help bring ride-sharing programs to every corner of the country. Let's do it. □

RIDES for Bay Area Commuters, Inc.
100 Van Ness Avenue, 19th Floor
San Francisco, CA 94102

CarShare Program
Metropolitan Transit Authority
P.O. Box 61429
Houston, TX 77208

Commuter Computer
3440 Wilshire Blvd., Suite 610
Los Angeles, CA 90010

Table 3. Addresses of three of the larger, metropolitan car pooling organizations.

THERE IS A DIFFERENCE IN TRS-80 DISK DRIVES CAPACITY

Expansion interface - gives your TRS-80 the disk capacity it needs, and much, much more!

10 to 40 MByte, 8" Winchester drive - expands capacity far beyond Model II storage.

Single sided minifloppy - up to 150 KBytes of storage capacity.

Single or double sided 8" floppies - up to 2.5 MBytes in dual drive cabinet - for the serious TRS-80 user.



LOBO DRIVES' new family of disk memory products provides you with a choice of memory capacities you need to effectively execute the complex business software you've developed for your TRS-80*. LOBO DRIVES' selection of readily available, software compatible drives permits you to expand your inventory, payroll, customer list, and accounts receivable files as your business grows.

And LOBO DRIVES brings you more... a new plug-in expansion interface that provides an easy way to add hardware enhancements, communications capability, and programmable features... and it comes with the LOBO DRIVES famous 1 year, 100% parts/labor warranty.

Call or write for the complete LOBO DRIVES story. Find out just how competitively priced a family of high capacity drives can be...



935 Camino Del Sur Goleta,
California 93017.
(805) 685-4546

"CAN YOU REALLY AFFORD
TO PAY LESS?"

Quantity discounts available -
Dealer inquiries invited

Yes, I want to know more about LOBO Drives and what they can do for my TRS-80. Send me information on:

- | | |
|---|---|
| ☐ 5 1/4-in. Floppy drive | ☐ 8-in. Winchester hard disk, 10 Mbyte drive |
| ☐ 8-in. Floppy drive
Single sided
Double sided | ☐ Double density
expansion interface |

Name _____

Company _____

Address _____

City _____

State _____

Zip _____

Phone No. _____

If dealer, provide resale no. _____

*TRS-80 is a registered trademark of Radio Shack, a Tandy Company.

CIRCLE 160 ON READER SERVICE CARD

Computers As Media At Westlake Gallery

Cathy Westlake



"So, the computer is taking over art," was the first testy remark of many visitors who had never before seen such work. The problem voiced by a small and sophisticated group of collectors was, "which works are suitable for the best investment?" Two unusual responses to an art show, but then the exhibition of computer generated art at Westlake Gallery at 210 East Post Road in White Plains, New York was an unusual one for a profit making gallery in the metropolitan area.



Untitled acrylic hooked wall hanging/rug designed by William H. Appgar and handcrafted by Sybil Watts.

The responses are significant. At the annual "Wood" show, no one suggested that art is being taken over by wood. When a group of innovative clay and paper wall constructions all but sold out in the spring, none but a few of the unsuccessful artists growled that painting is dead. The curator and the artists were pleased with the sales of the computer related art. In gallery terms, they were adequate. On the other hand, with seasoned collectors being joined

Cathy Westlake, 210 East Post Road, White Plains, NY, 10601.




Frame from the film "Graphic Music" by Herbert W. Franke.

daily by hundreds of new collectors, all eager to demonstrate the kind of insight into innovative art that will beat inflation, the fact that more collectors did not buy deserves to be looked at.

"COMPUTER: ARTIST - ARTIST: COMPUTER," as it was called, was an exhibition of works by fifteen artists, installed in the spacious main gallery, sixty feet long and sixteen feet high. Curator Carl Machover, computer graphics expert, selected many of the

most prominent artists to show in this relatively new field. His aim was toward presenting the widely varied field of creativity possible with computers. The installation went international with contributions from William Appgar of Canada with two colorful wall hangings; Tony Longson of England brought two unusual wall relief sculptures and several series of drawings; and Herbert W. Franke of West Germany sent an elegant series of abstract graphics.

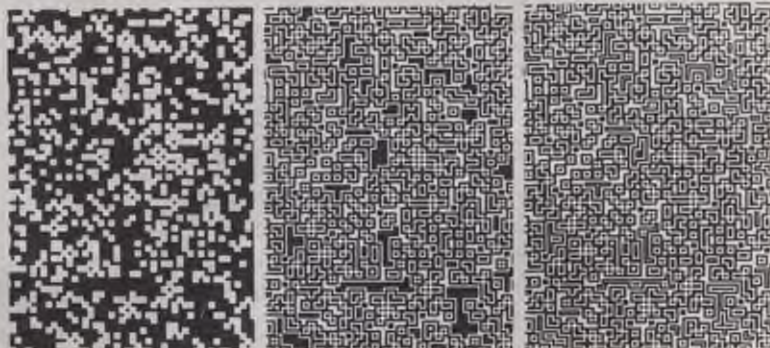

Contours inside and outside scattered boxes, a graphic by Ken Knowlton.

Computer Media, con't...

Works from the United States ranged from intricate graphics by Ken Knowlton, to a bold, four part abstract acrylic painting by Ruth Leavitt and Richard Helmick's hand printed colorful, rhythmic, silkscreened landscapes. Everyone enjoyed the humor in William Kolomyjec's "Banana Cone," a drawing in which the computer provides transitional visual steps of recomposing the image of a banana into an ice cream cone.


The critics approved. Kathie Beals, Arts Editor of the county-wide Westchester Gannet papers, wrote, "This is legitimate stuff: witty on occasion, striking in form, brilliant in color. You can relate to it exactly as you do to any other nonromantic work of art." Connie Winkler wrote in *Computerworld*, "It's a fun display of intense lines, bright acrylics, geometric weaving and a formica sculpture designed especially for the show and gallery."

"Sculpture by Solid Photography," a firm using a unique computerized system to "replicate" a person's head in sculpture, arranged a graphic visual display to help answer the hundreds who asked, "How can they do it?" A representative, Walter Dygus, presented an evening talk and discussion on the sculpture and other applications of Solid Photography.



Full size sculpture of Telly Savalas in bonded marble by Sculpture by Solid Photography with graphics by William Kolomyjec in the background.

These sculptures and their installation are central to the direction exhibitions should take to overcome the resistance of the public, both naive and sophisticated, to this medium. The artist, Robert Mallary, of the University of Massachusetts, was well established as a professional before he began working with computers. He is also a teacher. To compliment his sculpture, he constructed eight panels of verbal and visual material explaining "process."

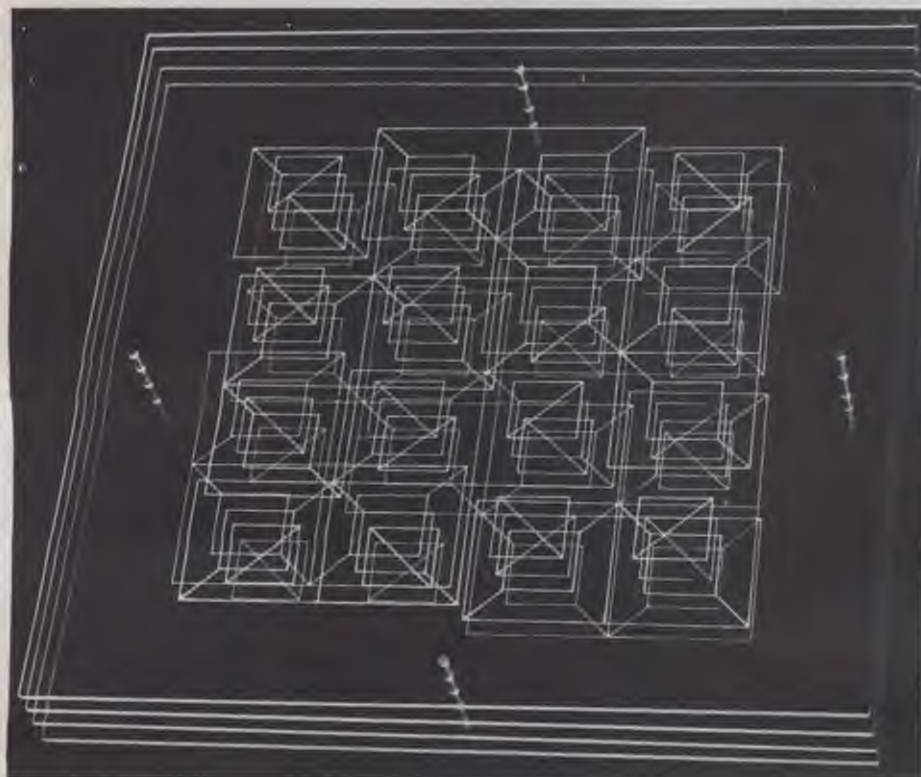

"Group Theory Grid," a perspective sculpture by Tony Longson.

In this presentation, he achieved a careful balance of information understandable to the lay person and interesting to the hundreds of computer users who live and work in Westchester.

The evening was one of nine special programs presented in the Gallery during the exhibition. Each was organized with the enthusiastic and generous support of specialists involved with computers in many areas. There were three evenings of computer related music organized by Elias Tannenbaum, prominent composer and teacher from Westchester, and by the members of SONAVERA Studios for the Sonic Arts in Hawthorne, New York. Lejaren Hiller sent tapes and records of his compositions from the State University of New York in Buffalo; Carl Machover orchestrated a program of video tapes and films from throughout the United




"WESTLK 4," computer generated modular formica sculpture by Robert Mallary. In the background are wall sculptures by Tony Longson, and "2 x 2," painting in acrylic by Ruth Leavitt.

States. A local audio-visual firm sent advanced equipment for projection and sound of the works under discussion. Hewlett-Packard sent their Desktop Computer System 45B and four color pen plotter, the 9872A and William Kolomyjec translated several of his programs for that equipment. Hal Shair of The Computer Corner of White Plains made a valuable contribution by demonstrating the graphics of Apple II with SOL, a small computer running the Electric Pencil and an accounts receivable program from Peachtree. Through the juxtaposition of a graphics oriented computer with one that does the verbal and mathematical functions affecting our daily lives, the audience gained an understanding of both. There was also a heated discussion on "Computer Coping" and a thought


Computer Media, con't...

provoking round table on the art itself. Through the combination of elements, a fearful curiosity was transformed into enthusiastic fascination.

Throughout the exhibition, individual viewers and audience members expressed a real fear of computer "takeover" of the artist's field. The fear is predominantly based on frustrating billing errors in which a company is blamed, rather than the programmer, for mistakes. Rumors of

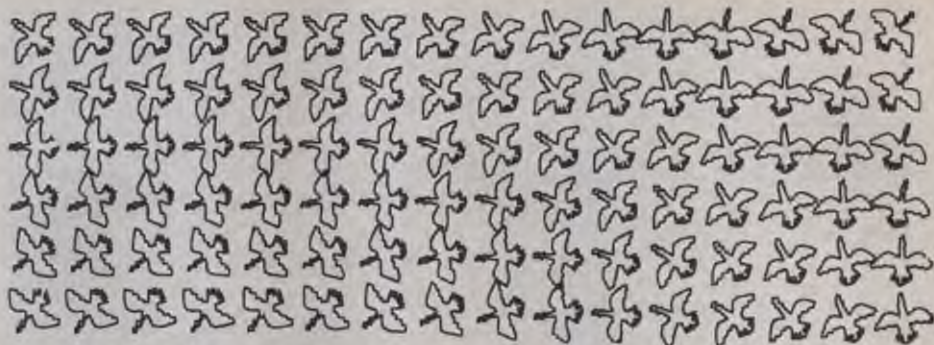

A portion of "Birds," a plotter graphic by William Kolomyjec.

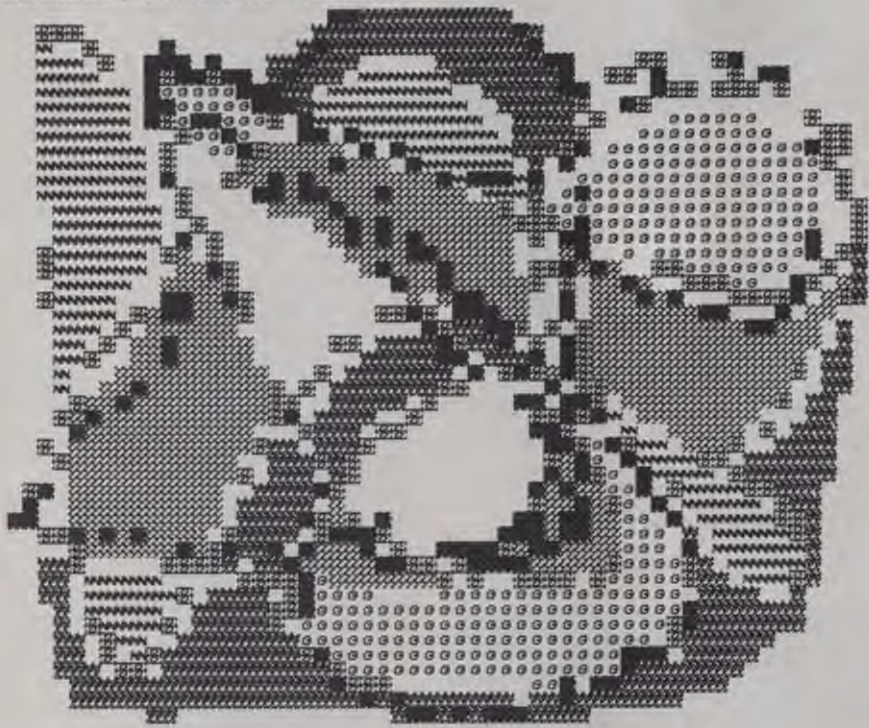

"Herringbone Variation III," a serigraph by Ruth Leavitt.

vast banks of personal information stored away somewhere, with the threat of a controlling and manipulating "Big Brother" computer, also contribute to this fear.

Relaxation was evident as people read Robert Mallary's essay or heard that, while the design for Apgar's hangings were computer generated, the hangings themselves were made by hand. Seeing the process of selection and aesthetic judgment exercised by an artist as the operator stopped and started Kolomyjec's programs on the Hewlett-Packard plotter, was reassuring. Hearing visual artist's such as Ken Knowlton and musicians, such as Dary John Mizelle agree that the computer is a tool or medium that is only as aesthetic, or as ethical, as its programmer, was soothing. The show and the programs not only gave people an understanding of the art involved, they also gained insights enabling them to cope with the

impact of computers in their daily lives in a more relaxed way.

There were related problems for the collector. The computer as medium conjures up the image of a person in business dress pushing buttons, ensconced in an ivory tower, far from the world of art. Will that artist blossom, or are these works only a temporary experiment? Can lines on a plotter be compared to a drawing? And, with the infinite reproductive talents of the computer, will the graphics artists stick to numbered editions which give graphics their value, or will the same spurious editions appear in this field that have in recent years done great damage to the graphics market in general?

The seriousness of the works on view helped to dispel these doubts. The inclusion of artist such as Mallary, Ruth Leavitt and Colette Bangert, well established as professionals before the advent of computers, helped. We also offered for

sale the book "Artist and Computer," edited by Ruth Leavitt, which contains essays by many of the artists in the show. In each, clearly, is a drive to succeed, an enthusiasm and an integrity that leave little room for doubt.

The remaining question is price. Those artists sold whose work was comparably priced with other graphics, drawings and sculpture on the art market today. The greater the reputation, the higher the price, as is true with art in general. However, any computer artist who is so zealous as to feel that his computer generated art is more valuable than art in another medium, will not succeed. As computer generated art gains more popularity, it will be as art that is innovative in technique and style and important in statement. Great talent and understanding will continually expand the boundaries of new media offered by computers.

We were hesitant about this exhibition until Carl Machover showed us the fine art created by his computer artist friends. Our enthusiasm has grown to the extent that we are convinced of the commercial and aesthetic value of staying involved. Our reaction to a summer with this new art form is that we will definitely do it again. □



"Contained Contours I," a plotter graphic by Colette and Charles Bangert.

Software for the TRS-80

PROGRAMMA

Software Products

TRS-80 TIELINE

TRS-80 TIELINE is an extended smart terminal program. Functions supported with this package are the ability to send and receive BASIC data and programs. A fully supported set of timeshare ASCII control keys are software selectable. 'ESC' and a 'BREAK' key function do not require any hardware modifications. Smart functions make it possible to jump from mode to mode with communication prior to program transmission or reception. Half and full duplex modes as well as line feed transmission or suppression, baud rate, parity, word length, stop bits are software selectable and can be changed while running. A printer can be connected for hard copy of communications as well as LLIST at baud rates that include 134.5 baud for certain serial printers. A special host or source mode allows other computers to use the TRS-80 TIELINE as a timeshare style computer. Programs can be run as well as disk files loaded, saved or transmitted by control from the distant computer. Character echo-back is supported. Host override of forbidden commands is possible. An additional feature allows testing of the TRS-80/RS232 hardware. The program is available for DOS 2.0 - 2.2 machines with 32K memory, RS232 board and modem. Additionally, the package includes a free copy of 'THE TRS-80 DATA COMMUNICATION HANDBOOK' by Stephen Gibson. The handbook is a compilation of terms and in depth explanations of data communication from the standpoint of the user, the hardware, and the phone company. Various phone line services are detailed. Baud rates, bits and codes are explained at hobbyist level. How a Bell 103 modem works and how to connect it is covered with emphasis on originate and answer frequencies, duplex, half-duplex and RS232 conventions. The EIA standards are given with ASCII control character set information.

TIELINE \$24.95
TRS-80 DATA COMM HANDBOOK \$ 5.95

All orders include 3% postage and handling. TRS-80 is a registered trademark of Radio Shack. California residents add 6% Sales Tax. VISA & MASTERCARD accepted.



TIELINE \$24.95



TRIBBLE TRAP II \$6.95



DIR \$14.95



ASTROLOGY II \$15.95



FIFTEEN NUMBERS \$6.95



ANSYSORT 3 \$29.95



PENTOMINOES \$9.95



THE I-CHING THING \$6.95



MACHINE TO BASIC \$6.95

PROGRAMMA
INTERNATIONAL, Inc.
3400 Wilshire Blvd.
Los Angeles, CA 90010
(213) 384-0579
384-1116
384-1117

Dealer Inquiries Invited

CIRCLE 190 ON READER SERVICE CARD



If you like PILOT, you're
going to love MUMPS!

A Touch of Mumps

Joan Zimmerman

MUMPS is affecting a lot of people these days. No, I don't mean the disease. I mean an easy and enjoyable programming language. The MUMPS language is used mostly for dialogues between the computer and user during which the computer displays data to the user and collects data from him. Dialogues can capitalize upon MUMPS' strengths in checking entered data for format, length, numerical size and so on. Language features of MUMPS can check the users' entries immediately and request a correction when an error is found, thereby improving the quality of the stored data.

The medical flavor of the name "MUMPS" is due to the language's origin in the medical environment. MUMPS began in 1965 at the Laboratory of Computer Science of the Massachusetts General Hospital, Boston. It was created to speed the development of medical applications for clinical laboratories, medical records and so on. Its merits were soon being applied to more personal applications such as games, letter writing and other composition tasks, check-book balancing, and teaching one's children (and/or friends) to spell and do mathematics.

Implementations of MUMPS are in progress for the IMSAI 8080 (running under CP/M) by Dr. Richard Walters (at the University of California, Davis), for the Z-80 by Richard Zapolin (at the MITRE Corporation, Bedford), and for the Motorola M-6800 by Dr. E. Strasbourger (at the Technion, Israel). There are plans for the micro-Nova, the LSI-11 and others. Many MUMPS implementations have been made for mini-computers, particularly Digital Equipment Corporation's PDP-11 and PDP-15, Data General's Nova and Eclipse, Prime's Prime-300, Philip's P800 and Artronix's PC-12 and Modalex.

MUMPS is standardized. Standard

MUMPS was developed by the MUMPS Development Committee (MDC) led by Ted O'Neill, Peter Ericson, and Jack Bowie. It was recently accepted by the American National Standards Institute (ANSI). There is an active users' group, the MUMPS Users' Group (MUG), with a developing application library and a quarterly newsletter. MUG publishes documents on MUMPS programming and the MDC has published a series of monographs describing MUMPS and how to implement it.

Two Examples

In view of the growing use of MUMPS, its acceptance by ANSI and the entry of MUMPS into the personal computing world, the following introduction to MUMPS is presented. It is illustrated by two examples of MUMPS code. First, a complete MUMPS routine for estimating the value of your exercise is shown in Figure 1. Interaction by a user with the routine is shown in Figure 2. As you can see, you are asked how much you have run, swum and cycled. Based upon your replies, the program calculates exercise points for the day(s) you indicated. The code for performing the calculation was written by me. It is based upon the "Point System" given by Kenneth H. Cooper, M.D., in his book *Aerobics*, published by Bantam Books, Inc. in 1968. (The revised and expanded point scheme given by Dr. Cooper in his 1970 book *The New Aerobics* is slightly more complex than the earlier scheme used for Figure 1.)

The second example of code, shown in Figure 3, is part of a larger program that teaches people interactively how to program in Standard MUMPS. A sample interaction with a student is shown in Figure 4. The teaching program displays text, asks each question, and evaluates each student's answer. If the answer is correct, the teaching program asks a new question; if it is incorrect, the teaching program gives a longer and simpler explanation, and perhaps asks a less complex question or two before returning to ask

again the question that the student couldn't answer. The MUMPS code that directs the teaching program was developed by Chris Brigham and me. The explanatory material and questions to teach MUMPS programming were developed by me, with help from Bob Stimac.

The Components Of Mumps

The major components of MUMPS, as for most other high-level languages, are:

- Data to be manipulated.
- Commands. These define the types of action to be taken, such as the assignment of a value to a variable (by means of the SET command) or the display of text (by using the WRITE command).
- Operators. These designate manipulations of the data. They include the greater-than operator (">") to find if one number is larger than another, and the pattern-match operator ("?") that is available for checking the format of entered data.
- Functions. These provide a simple and compact notation for describing diverse often complex manipulations that can be performed on data. They include \$DATA for determining whether or not a datum is defined, and \$PIECE for pulling one set of characters out of another.

There is only one type of data value in MUMPS: a string of up to 255 characters. A value is often represented as text surrounded by quotation marks, such as:

"MUMPS: IT'S CATCHING BUT IT DOESN'T HURT"

A special case of a MUMPS string is a number, such as 1066. Numbers may be quite large, up to 10^{25} , with nine digits of precision.

Each MUMPS command is followed by one or more arguments that further specify what the command does. An argument is composed of data,

Mumps, con't...

operators and functions. Let us look at the examples to see MUMPS in action.

Aerobics Example

Aerobics is exercise that lasts long enough to cause a considerable increase in your pulse rate and your oxygen consumption. Examples are walking or running, swimming and bicycling. In practice aerobic exercise should last for at least 12 minutes. The further you run, swim, or bicycle, and the faster your rate of exercise, the more aerobic exercise you give your body. Dr. Cooper's aerobic point score reflects the amount of aerobic exercise. For example, if you run 1 mile in 9 minutes you get 4 points, but if you can do it in 7 minutes you get 5 points. However, if it takes you 20 minutes or more, you have taken too long for the exercise to have an aerobic effect and you score no points. As you increase your distance, you get more points, even if you are quite slow. A reasonable goal for a week is a total of 30 points. This could be achieved by running 1.5 miles in about 14 minutes on 5 days out of the week, or in many other ways. For more facts and ideas, see Dr. Cooper's books. (Sedentary workers such as computer programmers, by the way, should take particular care to obtain enough aerobic exercise.) And remember that the Aerobics Institute Research Society charges \$24 a year for keeping an automated monthly record for exercisers of their achievements: you could provide such a service on your microcomputer.

General Code Structure

The MUMPS code for calculating your aerobics points is shown in Figure 1. It illustrates all the major MUMPS features. First of all, the code is a sequence of lines. Any line may have a label or name, shown in the left-hand column. In practice, only a few of the lines are labeled so as not to clutter up the code. A labeled line usually introduces a segment of code to which execution will branch from elsewhere, or code that will be invoked as a subroutine. This selective labeling helps the programmer to partition his code into logical segments. Also, the programmer's choice of mnemonic line labels (such as RUN, SWIM and BIKE in Figure 1) can remind him of each segment's purpose. This is particularly helpful if he wants to modify the code some time after he wrote it, when he will have forgotten almost everything about how it works.

Code may be further documented by means of comments, indicated in MUMPS by an initial semicolon. The first line, ZEX, in Figure 1 is a comment line. Actually, it adheres to the convention used by many MUMPS programmers of indicating in a rou-

```
ZEX ;ZIN$4 OCT 77:COOPER'S AEROBICS POINTS SYSTEM (11/70)
KILL SET SUM=0, DAY=0:JCE:SHOROLOG,"",1)

READ 1,"IS YOUR EXERCISE DATA FOR TODAY? (YES OR NO) ",X,1)
IF X="Y" THEN READ "HOW MANY DAYS AGO?" ,X,1) SET DAY=DAY-X
IF DATA(ZEX:DAY) WRITE "CHANGE FROM ",DAY," POINTS?" READ X,1) IF X="Y"
QUIT

RUN READ "HOW MANY MILES DID YOU RUN?" ,MILES,1) IF MILES=0 GOTO SWIM
IF MILES<100 WRITE "IMPOSSIBLE",1) GOTO RUN
IF MILES<2 WRITE "VERY GOOD",1)
READ "HOW MANY MINUTES DID THAT TAKE?" ,MINS,1)
IF MINS=0 GOTO ZERO GOTO RUN
SET T=MINS/MILES IF T<4 WRITE "THAT'S FAST!",1)
IF MILES<2,1019.99 SET POINTS=0 GOTO ERUN
SET POINTS=SELECT(T:1.5,2,1.4,3,1.3,4,1.2,5,1.1,6,1.0,7,0.9,8,0.8,9,0.7,10,0.6,11,0.5)*MILES

ERUN DO SET GOTO RUN
SWIM READ "HOW MANY YARDS DID YOU SWIM?" ,YARDS,1) IF YARDS=0 GOTO BIKE
IF YARDS<500 WRITE "WELL DONE",1)
READ "HOW MANY MINUTES DID YOU TAKE?" ,MINS,1) IF MINS=0 GOTO ZERO GOTO SWIM
SET T=MINS/YARDS
IF YARDS<100,T<3.3 SET POINTS=0 GOTO SWIM
SET POINTS=SELECT(T:1.4,2,1.3,3,1.2,4,1.1,5,1.0,6,0.9,7,0.8,8,0.7,9,0.6,10,0.5)*YARDS/100
IF POINTS<1 SET POINTS=0

BIKE READ "HOW MANY MILES DID YOU CYCLE?" ,MILES,1) IF MILES=0 GOTO END
IF MILES<5 WRITE "GOOD",1)
READ "HOW MANY MINUTES DID YOU TAKE?" ,MINS,1) IF MINS=0 GOTO ZERO GOTO BIKE
SET T=MINS/MILES
IF MINS<5,115.99 SET POINTS=0 GOTO BIKE
SET POINTS=SELECT(T:1.3,1.2,1.4,2,1.4,3,1.4,4,1.4,5,1.4,6,1.4,7,1.4,8,1.4,9,1.4,10,1.4,11,1.4,12,1.4,13,1.4,14,1.4,15,1.4,16,1.4,17,1.4,18,1.4,19,1.4,20,1.4)*MILES

ERUN DO SET GOTO RUN
END WRITE:DAY=SHOROLOG "TODAY'S " WRITE "POINTS" = "SUM",1)
SET ZEX:DAY+SUM WRITE "GOODBYE",1) KILL QUIT
SET SUM=SUM+POINTS
WRITE "YOU JUST ADDED ",POINTS," POINTS" IF POINTS<1 WRITE "0"
WRITE "AND YOUR TOTAL IS ",SUM,1,"ENTER MORE",1) QUIT
ZERO WRITE "YOU CAN'T DO THINGS IN NO TIME",1) QUIT
Z WRITE "ZEX" ZSTORE ZEX 0
```

1. MUMPS routine for estimating in "aerobic points" the value of your running, walking, swimming, and cycling exercise. (Line ZEX+4 is so long that the code ["Y" QUIT from the end of that line is printed on a new line.

line's first line who wrote the routine, when and for what purpose.

Variables

Variables are very important in all computer languages. A variable is an entity whose value may change. A variable name usually consists of up to eight alphabetic characters. Each variable may have a value of a variable-length string of characters, including the special case of a number. There are three types of variable:

1. Local variables. Each local variable is stored in the core of your computer and is unique to a user. The value of a local variable may be changed only by that user. Examples are SUM and DAY in line ZEX+1 (the line below ZEX).
2. Global variables. Each global variable is stored on a disc or other long-term storage medium. It may have its value inspected and changed by any user signed on to the data base. A global name is designated by a leading circumflex symbol ("^"). An example is ^ZEX in line ZEX+4. In practice, global variables take subscripts in parentheses after the global name, so that many values can be stored in different locations under the same overall global name. In our case we use the subscript DAY, and we store at different locations of ^ZEX the different numbers of aerobics points earned for the different values of DAY for which data are entered.

3. Special variables. The value of a special variable is assigned by the MUMPS system and cannot be changed directly by a user. The name of a special variable is designated by a leading dollar ("\$") symbol. An example is \$SHOROLOG in line ZEX+1.

Commands

The second line in Figure 1 shows two common MUMPS commands. That line begins with the

KILL

command, which removes all existing local variables so that the user's work space does not become cluttered with unnecessary data. On the same line (yes, you may put many commands on one line) is the

SET

command. This command is followed by "SUM", which is the name of a local variable to which the value of zero is assigned by:

```
SET SUM=0
```

Another example of the SET command appears in the line labeled SET (four lines from the end) and contains the code:

```
SET SUM=SUM+POINTS
```

Here the value of the variable SUM is incremented by the value of the variable POINTS, thereby gradually building up the value of SUM from zero to the total number of exercise points attained for the day.

Line SET+1 (the line below SET)

Mumps, con't...

shows another common MUMPS command:

WRITE

This command allows you to display text and the values of variables. In line SET+1, the computer is instructed to tell the user:

YOU JUST ADDED

and then show the value of the variable POINTS, which will be a number of zero or (hopefully!) more. The computer adds the word "POINT" after the number. At the end of this same line (SET+1) is the

IF

command. It determines whether the variable POINTS has the value 1 by means of the code

IF POINTS'=1

This means that if the value of the variable POINTS is not (not is signified by "'") equal to ("=") 1 then an "S" is written to make the displayed "POINT" plural: "POINTS".

Another frequently used command is:

READ

Examples start lines RUN, SWIM, and BIKE. The READ command can cause string constants like "HOW MANY

```
D ZEX

IS YOUR EXERCISE DATA FOR TODAY? (YES OR NO) YES
HOW MANY MILES DID YOU RUN? 3
VERY GOOD
HOW MANY MINUTES DID THAT TAKE? 27
YOU JUST ADDED 12 POINTS AND YOUR TOTAL IS 12
ENTER MORE

HOW MANY MILES DID YOU RUN?
HOW MANY YARDS DID YOU SWIM?
HOW MANY MILES DID YOU CYCLE? 3
HOW MANY MINUTES DID YOU TAKE? 15
YOU JUST ADDED 1.5 POINTS AND YOUR TOTAL IS 13.5
ENTER MORE

HOW MANY MILES DID YOU CYCLE? 3
HOW MANY MINUTES DID YOU TAKE? 20
YOU JUST ADDED 0 POINTS AND YOUR TOTAL IS 13.5
ENTER MORE

HOW MANY MILES DID YOU CYCLE?
TODAY'S POINTS = 13.5
GOODBYE

D ZEX

IS YOUR EXERCISE DATA FOR TODAY? (YES OR NO) NO
HOW MANY PAYS ADD? 3
HOW MANY MILES DID YOU RUN? 2
HOW MANY MINUTES DID THAT TAKE? 18
YOU JUST ADDED 3 POINTS AND YOUR TOTAL IS 8
ENTER MORE

HOW MANY MILES DID YOU RUN?
HOW MANY YARDS DID YOU SWIM?
HOW MANY MILES DID YOU CYCLE? 3
HOW MANY MINUTES DID YOU TAKE? 15
YOU JUST ADDED 1.5 POINTS AND YOUR TOTAL IS 9.5
ENTER MORE

HOW MANY MILES DID YOU CYCLE?
POINTS = 9.5
GOODBYE
```

2. Interaction by a user with the "aerobics" routine shown in Figure 1.

MILES DID YOU RUN?" to be displayed as does the WRITE command. The difference between the two commands is how they handle variables. The instruction:

WRITE X

causes the computer to display the value of the variable X. On the other hand, the instruction

READ X

causes the computer to wait for the user to type in a value to be assigned to the variable X. So, in line RUN, the READ command prompts the user by asking him how many miles he has run and waits for him to enter a value for the variable MILES. (The exclamation mark (!) after the variable name MILES is a formatting operator. It causes a "carriage-return/line-feed" so that a new line is started for subsequent text.)

The last three commands discussed here are DO, GOTO and QUIT. DO invokes a subroutine. For example, in line ERUN:

DO SET

causes execution to branch from line ERUN to line SET and to continue through lines SET+1 and SET+2, until finally the QUIT command at the end of line SET+2 is encountered. QUIT signifies the end of the subroutine, and

LET IT ALL HANG OUT!



Creative's own outrageous **Bionic Toad** in dark blue on a light blue shirt for kids and adults.

Computer Bum — black design by cartoonist Monte Wolverton on gray denim-look shirt with black neckband and cuffs.

I'd rather be playing spacewar — black with white spaceships and lettering.

Plotter display of **Pi to 625 Places** in dark brown on a tan shirt.

Creative Computing — Albert Einstein in black on a red denim-look shirt with red neckband and cuffs.

T-shirts available in adult sizes S, M, L, XL; and in children's sizes (Bionic Toad and Spacewar) S, M, L. When ordering, specify design and size. Made in USA. \$5.00 postpaid in USA; \$6.00 postpaid, foreign.

In a Hurry?
Call your Visa or Master/Charge order in to:
800-631-8112 (In NJ, call 201-540-0445)

Creative Computing T-Shirts
P.O. Box 789-M
Morristown, NJ 07960

creative computing

Mumps, con't...

execution returns to line ERUN at the position after:

DO SET

where we see:

GOTO RUN

Accordingly the computer next executes a GOTO command causing transfer of execution to line RUN. The difference between the DO and the GOTO command is that the DO command specifies a temporary transfer of execution that will return to the instruction after the invoking DO command once the subroutine is completed. (That completion is signified by a QUIT command.) On the other hand, the GOTO command specifies a permanent transfer of execution.

Operators

MUMPS contains the usual arithmetic operators of addition ("+"), subtraction ("-"), as in line SET:

SET SUM=SUM+POINTS

and multiplication ("*"), as in line ZEX+3:

SET DAY=DAY-X

and division ("/"), as in line SWIM+3:

SET T=100*MINS/YARDS

The language also contains the "\" operator, which causes division but

with the result truncated to a whole (nonfractional number), and the "#" operator, which is the modulo operator and yields the remainder of a division.

Three arithmetic "relational" operators are available. First is the equals operator ("="), as in line SET+1:

IF POINTS=1

(The equals operator is qualified by the negation operator ("!=") so that we are actually determining whether the value of POINTS does not equal one.) Next is the greater-than ">" operator, as in line RUN+1:

IF MILES>100

Similar but opposite in effect is the less-than ("<") operator, as in line RUN+6:

IF MILES<2

The above operators all manipulate numbers. Other operators manipulate strings, and two such operators appear in Figure 1. The simpler one is the contains ("[") operator, which is useful for determining whether one string contains another, as in line ZEX+4:

IF X["Y" QUIT

```

ZST 2CRP,22127 JUN 77:PART OF "TAKE QUESTIONNAIRE" FOR CREATIVE COMPUTING
AN  WRITE 1,APRICE("NUMBER ANSWERS: YES/NO?",""),1,1," "
SET RT5=APRICE("HOROLOG",""),2) READ RM:500,
SET RT5=APRICE("HOROLOG",""),2) RT5
ELSE WRITE "I STOPPED BECAUSE I THOUGHT YOU HAD GONE AWAY," SET RM="END"
QUIT
IF RM=" " WRITE "ENTER ",APRICE("A NUMBER FROM TEXT YES OR NO?",""),1,1," "
OR "END" GOTO AN
IF ALGORTHM:75 WRITE 1,"* BRIEFER * GOTO AN
IF EXTRACT:11," " QUIT
IF RT5=" " WRITE 1,"COMMENTS ARE NOT RECORDED" GOTO AN
DO CM SET DMY=QUICK,RT5,2)
WRITE 1,"THANKS. ENTER YOUR ANSWER NOW" QUIT
CM  WRITE 1,"ENTER COMMENTS (END BY PRESSING ONLY THE ENTRY KEY)"
FOR A=1:1 READ 1," ",1,4 GOTO RM=" " DO:ALGORTHM:100 CLOD SET "DUBICH,10
5,2000A)FR," "
N  SET "DUBICH,105,2000A)A=1,2+A QUIT
CLOD SET X=APRICE(X,1,4)INDIEXTRACT:1,70,VVVF," "
WRITE "REMEMBER TO PRESS ENTRY KEY AFTER EACH LINE. WE HAVE STORED:",1,1
QUIT
X  WRITE "2051- ZSTORE 2051 QUIT

```

3. Part of a MUMPS program that teaches people interactively how to program in Standard MUMPS. (Lines AN+3, AN+4, and CM+1 are so long that each is continued on a new line.)

Want to REALLY UNDERSTAND The BASIC Language?

From the author of the highly acclaimed TRS-80 Users/Learners Manual comes the book you've been asking for! The **BASIC Handbook** is THE definitive reference and "idea" book, explaining in detail the BASIC language as used in over 50 favorite micros, minis and mainframes.

It's not a dictionary, and not a textbook, but a virtual ENCYCLOPEDIA of the BASIC language. In it is everything you need to know about the most important BASIC statements, functions, operators and commands, explained in a way that you can put them right to work.

This HANDBOOK is written to be used!

With the BASIC Handbook you can finally make those programs found in magazines run on your computer — or know the reason why they can't.

If there is an alternate way to write a program using other BASIC words, the Handbook shows you how. If there is a function needed but your machine doesn't have it, the Handbook gives you a subroutine that accomplishes the same thing. About the only thing it won't help you with is an additional 16K of memory.

Is TRS-80 Level II covered — YES!

Is PET covered — YES!

Is Apple covered — YES!

Sorcerer, Altair, Imsai, Etc.

YES... and over 50 more!

COMPUSOFT™ PUBLISHING

A Division of CompuSoft, Inc.
8643 Navajo Road
San Diego, California 92119



360 pages
Soft Cover

30-Day money back
Guarantee

Order Today!

YES, I need the BASIC HANDBOOK
CompuSoft Publishing 8643 Navajo Road San Diego, CA 92119
Please send _____ copies of The BASIC Handbook. My check
for \$14.95 each + \$1.35 P & H is enclosed. (California
add 6% tax)
Name _____ Address _____
City _____ State _____ Zip _____

I understand my handbook will be shipped promptly and there
is a 30-day money back guarantee.

My Computer is a _____

Mumps, con't...

The operator is qualified by the negation ("") operator, so that this code reads: if the value of the variable X does not contain the character "Y" then stop.

Also illustrated is the pattern-match operator ("?"), which appears in line ZEX+3 as:

```
IF X'?1"Y".E
```

Again the operator is qualified by the negation operator. The code means that if the variable X does not have the pattern whose format is defined by the code:

```
1"Y".E
```

then do whatever comes next (i.e. find out how many days ago the exercise to be reported was done). The code following a pattern-match operator comprises a series of particular characters sought (in quotation marks) or the code for the types of character sought (such as A for any alphabetic, N for numerics, or E for anything); each pattern code or set of characters in quotes is preceded by a digit denoting the number of instances looked for. The code in our example means that we are looking for a format of one letter Y (1"Y") followed by any number (represented by ".") of characters of any kind ("E").

Other string operators are the string-equals ("=") operator, which looks for equality of strings, the follows ("I") operator mostly used for determining whether one string follows another alphabetically, the catenation ("_") operator used for joining two strings together to form one, and the indirection ("@") operator, which allows data values to be executed as MUMPS code.

Functions

Standard MUMPS contains 13 functions. The example in Figure 1 shows three of them:

```
$PIECE
```

in line ZEX+1

```
$DATA
```

in line ZEX+4, and

```
$SELECT
```

in lines RUN+7, SWIM+5, and BIKE+5.

Consider \$PIECE. It appears in line ZEX+1 as:

```
SET DAY=$PIECE($HOROLOGY,".",1)
```

\$PIECE manipulates the items that follow it between parentheses. The first item in the example is \$HOROLOGY, a system variable whose value is a string of digits signifying the day followed by a comma and then the number of seconds that have elapsed since midnight. After \$HOROLOGY comes a comma and a string contained in quotation marks:

That string specifies the characters (in this case a single comma) by which the first item in the parentheses (\$HOROLOGY) is to be broken apart. Finally there is another comma and the number:

1

before the closing parenthesis, showing that the group of characters before the first comma in \$HOROLOGY is to be taken as the desired PIECE. The resulting number signifies the day and is assigned to the variable DAY.

The second function is \$DATA. This appears in line ZEX+4 as:

```
IF $DATA(^ZEX(DAY))
```

\$DATA determines whether the variable following it in parentheses already exists. The variable in parentheses is the global variable ^ZEX(DAY). It will only be defined if data have already been entered for the date represented by the present value of DAY. That value is either today's date or the number of days previously specified by the user in line ZEX+3.

```

P 'QUE
HI THERE!
** WARNING **
THE TEACHING PROGRAM WILL NOT BE AVAILABLE AFTER FRIDAY 21 APRIL.
HOPE YOU CAN FINISH ALL YOU NEED TO DO BY THEN.
IF NOT, SEE JOAN.

ENTER YOUR LAST NAME: JIMMERMAN
ENTER YOUR FIRST NAME: JOAN

DO YOU NEED A LIST OF LESSONS? YES
LESSON 1. OUTLINE OF THE STANDARD MUMPS COURSE
LESSON 2. BACKGROUND ON MUMPS
LESSON 3. CONCEPTS
LESSON 4. COMMANDS
LESSON 5. FUNCTIONS
LESSON 6. OPERATIONS
LESSON 7. FURTHER COMMANDS
LESSON 11. DIRECT MODE COMMANDS (DLC, POP-11)
LESSON 12. NOT WRITTEN (TO BE POP-10/RNC DIRECT MODE)
LESSON 13. NOT WRITTEN (TO BE R4700/DAVIS DIRECT M.)
LESSON 14. NOT WRITTEN (TO BE 1346/RLN DIRECT MODE)
LESSON 15. NOT WRITTEN (TO BE PRIME DIRECT MODE)
LESSON 31. GLOBALS
LESSON 32. INPUT/OUTPUT AND SPECIAL VARIABLES
LESSON 33. CONDITIONAL COMMANDS: INDIRECTION
LESSON 36. AUTHOR'S AIDS
LESSON 39. GUIDANCE ON QUESTIONNAIRE USE

LESSON # 4   COMMANDS

LET ME BEGIN WITH SOME MUMPS CODE. HERE IT IS!

WRITE "HELLO, WHO ARE YOU?" READ 1 WRITE "HELLO, "X

THE FIRST WORD ON THAT LINE OF CODE IS THE WRITE COMMAND.
JUST TO MAKE SURE YOU KNOW WHAT A COMMAND IS, PLEASE SELECT
AN ANSWER FROM THE FOLLOWING:
1. A COMMAND IS AN INSTRUCTION GIVEN TO THE COMPUTER
2. I AM NOT SURE! PLEASE REFRASH MY MEMORY
NUMBER # 2

THE WORD "COMMAND" IS USED IN MUMPS TO DENOTE A WORD OF INSTRUCTION
TO THE COMPUTER. WHEN YOU WANT THE COMPUTER TO DO SOMETHING FOR YOU,
YOU GIVE IT THE APPROPRIATE COMMAND. FOR EXAMPLE IF YOU WANT THE
COMPUTER TO WRITE SOMETHING FOR YOU, YOU USE THE "WRITE" COMMAND.
IS THAT CLEAR?
YES/NO? YES

GOOD.

THE WRITE COMMAND LETS YOU DISPLAY STRINGS OF CHARACTERS.
WHAT IS THE RESULT OF THE FOLLOWING MUMPS CODE:
WRITE "HELLO"
1. THE COMPUTER WRITES HELLO, RIGHT IN FRONT OF YOUR EYES.
2. THE COMPUTER IGNORES YOU.
3. THE COMPUTER SAYS HELLO OUT LOUD.
4. I DON'T KNOW.
NUMBER # 1

```

4. Sample interaction between a student and the Standard MUMPS teaching program, part of which was shown in Figure 3.

The third function is \$SELECT. This is a powerful function. It is a little complex, but after you have mastered this one, you will find the remaining MUMPS functions very easy. Consider what we want to do with \$SELECT. Basically, we want to determine how many aerobic points we have earned for our exercise. Look at running. We calculate in line RUN+5 a value for the variable T that is equal to the number of minutes for which we have run divided by the number of miles we ran. This is calculated by the code:

```
SET T=MINS/MILES
```

In line RUN+6 we weed out the guys that run under 2 miles and take more than 20 minutes per mile, by assigning them zero points and branching to the line ERUN. For the more successful exercisers, the \$SELECT function in line RUN+7 assigns points depending upon the number of minutes taken per mile. (The numbers of points come from the tables in Dr. Cooper's book.) If you took under 6.5 minutes per mile, you are a really speedy guy and you get 6 points for each mile you ran; if you

Mumps, con't...

took 6.5 minutes or more but under 8 minutes you get 5 points per mile run. And so on until if you took 20 minutes or more per mile (but ran over 2 miles and so were not rejected in line RUN+6) you get a meager 0.5 points per mile. You could express this as a series of IF commands taking seven lines:

```
IF T<6.5 SET POINTS=6*MILES
GOTO ERUN
IF T<8 SET POINTS=5*MILES GOTO
ERUN
IF T<10 SET POINTS=4*MILES
GOTO ERUN
IF T<12 SET POINTS=3*MILES GOTO
ERUN
IF T<14.5 SET POINTS=2*MILES
GOTO ERUN
IF T<20 SET POINTS=MILES GOTO
ERUN
SET POINTS=MILES/2
```

But all this can be done in a single line (RUN+7) by using one command and the \$SELECT function. The \$SELECT function contains in its parentheses a sequence of pairs. The first item in each pair is a "truth-valued expression" (such as T<6.5), which is evaluated to determine if it is true or false. This is followed by a colon and the second member of the pair (such as 6), denoting the value to be assigned to the \$SELECT function if the truth-

valued expression is true. Thus the first pair of items in the parentheses is:

T<6.5:6

meaning that if T is less than 6.5 then \$SELECT is to have the value of 6. The next pair, separated from the first pair by a comma, is:

T<8:5

Now, if T is not less than 6.5 (causing T<6.5 to be false) the truth-value T<8 is evaluated and if T is less than 8 then \$SELECT has the value 5. The function built up thus far with these two pairs is:

\$SELECT(T<6.5:6,T<8:5

The function is completed as shown in line RUN+7. Note that the last pair of items is:

1:5

The truth-valued expression here is simply 1, which by convention means true. Accordingly, if evaluation progresses this far, \$SELECT is forced to have the value 0.5, thereby ensuring that a value for \$SELECT will always be defined no matter what the value of T.

Discussion

From the information given you should be able to see how the rest of the code in Figure 1 works. Lines SWIM to ESWIM collect data on how far you swam and how long you took. In line SWIM+3, the mean time taken per 100

yards swam is calculated as the value of T, and the result is used in line SWIM+5's \$SELECT function to determine the number of points earned. When no more swimming data are to be entered, execution moves to line BIKE, where data on cycling are collected. Finally, lines END and END+1 are executed in which the total points scored are noted and the result is stored safely away in global ^ZEX (DAY). With what you have learned you, could now write a MUMPS routine that scans through the data stored in ^ZEX for the last 7 days and that tells you whether or not you achieved at least 30 points during the week.

Teaching Program Example

There are many aspects to the teaching program shown in Fig. 3 and 4, including the authoring and editing of the text and questions, the student's use of the teaching program, and the subsequent inspection by a supervisor of how correctly and quickly the student has passed through the course work. The example shown in Figure 3 is part of the code that prompts a student to answer a displayed question, as indicated in the documentation line, ZQST. Questions can be of four types:

1. No response required,
2. Multiple-choice, for which a number is to be entered that

Omikron transforms TRS-80* into a powerful business system.

STANDARD DRIVES 8" Drives give you 5 times the speed and 3 times the storage of your mini drives! Our system provides a standard Shugart interface so you can use either your 8" drives or ours.

SOFTWARE CP/M* is the most popular operating system for microcomputers. But many high-level languages and advanced business programs cannot run with the special CP/M* designed exclusively for the TRS-80*. The Omikron MAPPER with standard CP/M* allows you to expand your software capability to go beyond the few available TRS-80 compatible packages. TRS-80* with Mapper outperforms systems costing \$1000 or more.

The MAPPER I and MAPPER II are plug-in modules.

They don't require any circuit changes, are easy to install, and they don't interfere with the normal operation of your TRS-80*. All your original software will still run properly. Omikron products require a minimum of 16K memory and the TRS-80* Expansion Interface.

★ ★ ★

MAPPER I is a memory management unit which adapts your TRS-80* to run standard CP/M*. The user can choose either CP/M* or TRS-80* DOS through keyboard control. The package includes CP/M* software on 5" diskette and documentation. Specify memory size when ordering. \$199.

MAPPER II is a disk adapter module which enables the TRS-80* to run both 5" and 8" drives. It will interface to the MAPPER I for CP/M* operation, or can be used alone with our modified TRS-80* DOS software. Files can be transferred between the different size drives. Specify cable requirements when ordering. \$99, plus \$10 per cable connector.

SYSTEMS—Omikron's complete systems feature Shugart 8" drives mounted in a dual drive cabinet with heavy duty power supply, MAPPERS I and II, cable and CP/M* software. Dual drives—\$1795; Single drive \$1195.

WARRANTY—6 months parts and labor. Satisfaction guaranteed. Dealer inquiries invited.

*CP/M is a TM of Digital Research. TRS-80 is a TM of Tandy Corporation.

Call for details on Omikron's TRS-80* DOS package.



Products that set Precedent!
1127 Hearst St. Berkeley, CA 94702 (415) 845-8013

Mumps, con't...

corresponds to one of the displayed alternate answers.

3. Free text, where a student may enter an answer with no constraints.
4. Yes/no, where a student is to enter either yes or no.

The variable TY has the value of 1, 2, 3, or 4, depending upon which type of question is being asked. If a response is required, the \$PIECE function in line AN causes the appropriate prompt to be displayed. (Note that here the string used as the divider is "&" instead of the "," used in line ZEX of the aerobics example.)

Line AN+1 sets variables RTS equal to the value of the present time by taking the piece of \$HOROLOG after the comma. (We used the first part of this system variable in the aerobics example to determine the date.) This is done in order to measure how long the student takes to answer the question, and read his answer into variable RN by:

READ RN:300!

The ":300" after RN is called a "time out." It places a limit upon the number of seconds that the computer will wait for a response: if the student makes no response within 5 minutes, the system proceeds to the next code. The "!" is the carriage-return/line-feed format operator once again. In the next line, we calculate the number of seconds taken to respond to the question by subtracting RTS from the present time.

Line AN+3 introduces a new command:

ELSE

which may thought of as the opposite of IF. ELSE has no argument and therefore has two spaces after it. It makes use of a system variable called \$TEST. The value of \$TEST can be changed indirectly by various causes. Of relevance to our example is that the value of \$TEST depends on whether the value of RN is entered within 5 minutes (in which case \$TEST is 1) or whether it is not entered in time (\$TEST becomes 0). When \$TEST has the value 0, the code following the ELSE command is executed. Thus, if the answer was not entered in time, the computer says:

I STOPPED BECAUSE I THOUGHT YOU HAD GONE AWAY

and sets the value of RN equal to "END" and stops.

Usually an answer is entered quickly enough and so execution moves to line AN+4, where the value of RN is checked. If it is equal to a question mark ("?"), indicating that the student is not sure what to do, a brief explanation is given of the desired type of answer before the system branches

back to line AN. RN is checked in the next line (AN+5) for length by means of the

\$LENGTH

function, which yields the number of characters in the value of the variable in the function's parentheses. If the response is over 95 characters long, we request a briefer response. Our final check on the value of RN is in line AN+6 and makes use of the

\$EXTRACT

function, which pulls out from a string a group of characters. The example:

\$EXTRACT(RN,1)

means the first character of the answer, RN. If the first character is not an exclamation mark ("!") we stop this subroutine. However, a leading exclamation mark means that the student wants to enter a comment; if the variable RLF contains a "C" denoting that the author wants comments they are entered using lines AN+8 and AN+9, and the comment subroutine starting at line CM. The reader may figure out how this is done with the following hints:

1. The FOR command with the argument "A=Z:1" means that A is to be set equal to the value of the variable Z (a counter that holds the total number of comment lines entered by the student while taking a lesson) and the rest of the line is to be executed; A is then to be incremented by 1 and the line again executed; and so on. This stops only when no line of comment is entered, so that X has the value "", at which point the code "GOTO N" is executed.
2. ^QUB(CN,IDS,2000+A) specifies the part of the global variable ^QUB where this particular line of comments is to be stored. CN is a number that specifies the chapter being learned by the student. IDS is a unique number designating the student. CN and IDS are used as subscripts of ^QUB, as is 2000+A.
3. The comment is recorded as:
FR_"X"

where FR is the particular frame or question number for which X is a line of comment.

Resources For Further MUMPS Information

Information on MUMPS and the MUMPS Users' Group may be obtained from Mr. Richard E. Zapolin, MUG Executive Director, The MITRE Corporation, P.O. Box 208, Bedford, MA 01730. Among the documents you might like to purchase are:

—Standard MUMPS Pocket Guide, a concise summary of all the

features of the MUMPS language. \$1 per copy.

- Book of MUMPS, a review of the MUMPS language and its applications, including a list of the 15 machines upon which MUMPS is implemented, and the sources of the implementations. \$2 per copy.
- MUMPS Programmer's Reference Manual (developed by the MDC), a detailed reference work on the language. \$5 per copy.
- Advanced MUMPS Techniques, a text on all aspects of writing powerful and effective MUMPS code. \$9 per copy.

Information on the MUMPS Development Committee and further development of the MUMPS language may be obtained from Dr. Richard F. Walters, MDC Chairman, University of California at Davis, Medical Learning Resources, Davis, CA 95616. □

BIBLIOGRAPHY

- Robert F. Beckley III and David A. Bridger, *Advanced MUMPS Techniques*, MUMPS Users' Group, Bedford, 1977.
- Melvin E. Conway and Paul L. Eggerman, *MUMPS Programmers' Reference Manual*, MUMPS Users' Group, Bedford, MA, 1975.
- Kenneth H. Cooper, *Aerobics*, Bantam Books, 1968.
- Kenneth H. Cooper, *The New Aerobics*, Bantam Books, 1970.
- Digital Equipment Corporation's *Introduction to the MUMPS-11 Language and MUMPS-11 Language Reference Manual*. These documents may be obtained from your local Digital Equipment Corporation office.
- MUMPS Development Committee documents on implementing the MUMPS language may be obtained through the MUMPS Development Committee Chairman, Dr. Richard F. Walters, University of California at Davis, Medical Learning Resources, Davis, CA 95616.
- MUMPS Users' Group documents may be obtained from the MUG Executive Director, Mr. Richard E. Zapolin, The MITRE Corporation, PO Box 208, Bedford, MA 01730.
- Tom Munnecke, "Your Personal Genie, Part 2", *Personal Computing*, 1, 4, p. 75, July/August 1977.
- J. T. O'Neill, Editor, "MUMPS Language Standard", National Bureau of Standards Handbook 118, available from the US Printing Office, Superintendent of Documents, Washington DC 20402, 1976. This is the book that defines the MUMPS standard accepted by the MUMPS Development Committee and the American National Standards Institute.
- Larry J. Peck and Robert A. Greenes, *MUMPS Documentation Manual*, MUMPS Users' Group, Bedford, MA, 1975.
- Richard Zapolin, Editor, *MUMPS News*, quarterly newsletter on the MUMPS language and its applications.
- Joan Zimmerman, *Book of MUMPS*, MUMPS Users' Group, Bedford, 1977.
- Joan Zimmerman, *Standard MUMPS Pocket Guide*, MUMPS Users' Group, Bedford, 1976.
- Joan Zimmerman and Christopher Brigham, "MUMPS Application Design Manual for QUEST, A Simple Questionnaire Driver for Teaching and Testing Students", BCL Monograph No. 300, Washington University, St. Louis, 1977.

COMPUTER MYTHS EXPLAINED



MYTH COMPUTER CONCOCTIONS

BY RELYING ON COMPUTERS TO CORRELATE OUR SCIENTIFIC INFORMATION, WE'RE LAYING OURSELVES WIDE OPEN FOR SOME HORRIBLE **HOAXES!** COMPUTERS THAT PROCESS IMAGE DATA FROM INTERPLANETARY SPACE PROBES WILL MAKE UP ANY ENHANCEMENTS THEY WANT, ASTOUNDING SCIENTISTS WITH **NEW MOONS OF JUPITER** AND TERRORIZING HUMANS WITH PICTURES OF **NON-EXISTENT ALIEN LIFE FORMS!**

The Comprint 912 printer. No one else can match our speed, our print quality, our quiet operation, or our reliability. Not for \$660 they can't.

Our Comprint 912 is the best printer for the money. Period. Any printer that can match our price can't even begin to match our performance. And any printer that boasts performance like ours doesn't even come close to our price. No matter what your application; computer reports, listings, CRT hard copy, message



The Comprint 912 prints nearly 3 lines every second.

Speed.

At 225 characters per second (170 LPM) the Comprint 912 is up to 4 times faster than impact

printers costing hundreds of dollars more. With our printer you don't waste time and money waiting for your print-out.

Print Quality.

Our 9x12 matrix provides sharp, crisp characters. Compare that with our competition. Their very best is a 9x7 matrix, which means no lower case descenders and cramped letters. With the Comprint 912 you don't have to put up with the irritation of fuzzy, hard to read computer printing. This



CRT hardcopy is an excellent application for the Comprint 912.

receiving, scientific/industrial data logging, or anything you can think of, the Comprint 912 is the performance leader in printers under \$1000.

First consider our performance.

exceptional print quality in-ly by the Comprint 912 in 7 nless reliability, 6 month rallel I/O and 8 1/2" wide been shipped to happy custo

The superior print quality provided by the Comprint 912 is obvious in this actual size sample.

means increased productivity. And because the Comprint 912 makes better originals, our originals make better Xeroxes.

Quiet Operation.

Most computer printers are irritatingly noisy. They can disrupt concentration and reduce the efficiency of anyone working near them. They're noisy because they're



The Comprint 912 is quiet because it's electronic not mechanical.

impact. The Comprint 912 has no mechanical print head banging on the paper. It's electronic. It's quiet.

Reliability.

Since the Comprint 912 prints electronically, rather than mechanically like ordinary impact printers, we have fewer moving parts and less vibration. The Comprint 912 has fewer things to go wrong and less wear. That's why we

offer a 6 month warranty, twice the industry standard. The key to all this superior performance is our special



Fewer moving parts in the Comprint 912 mean greater reliability.

paper. This aluminized "silver paper" works just like ordinary paper. It won't fade or discolor and actually costs less than plain paper and one time ribbons. For the vast majority of printing applications it's just plain better than plain paper. Especially when you consider the hidden costs of plain paper printers due to their inferior performance compared to the Comprint 912. And on those rare occasions when you really do



need a plain bond paper copy, just run your Comprint 912 printout through your plain bond copy machine and you've got it. Even though our paper is special, it's available everywhere; from your dealer or distributor, or from us.

Now consider our price.

The Comprint 912.

\$660 with parallel interface, \$699 with serial interface.

We could talk about our other advantages, like our 80-character lines on 8-1/2" wide paper, or our compact, light-weight size, and the fact that the Comprint 912 has no ribbons to mess with, no chemicals, nothing to add but paper.

But you have to see for yourself. Before you buy any printer, insist on seeing the Comprint 912, the performance leader, at your local computer store or industrial distributor. Or contact us for a descriptive brochure, a sample print-out, and applications literature.

comprint

The performance leader.

CIRCLE 129 ON READER SERVICE CARD

Computer Printers International, Inc.
340 E. Middlefield Rd.
Mountain View, California 94043
415 969-6161

Build Your Own Joysticks And Other Analog-To-Digital Devices

Gary Sabot

Most computer hobbyists would like their computer to be equipped with an Analog-To-Digital (A/D) converter. Such a converter allows a system to respond to input from joysticks and slide pots (perfect for games), serve as a digital voltmeter, along with other similar applications. Many hobbyists, however, have shied away from A/D converters because of their high cost.

This article will present an eight-channel A/D converter for which parts can be purchased for less than \$10. Its abilities and uses are far more numerous than its simple design and low parts count imply.

Circuit Operation

The A/D converter (Figure 1) may be divided into two functional parts: a ramp generator and the two 339 quad comparators. In electronics, a ramp is a portion of a waveform that changes linearly with time. This particular ramp generator is composed of Q1, Q2 and their associated circuitry.

Q2 and R4 form an "electronic switch" that is controlled through software. Q1 and R1-3 form a constant current source. This source attempts to charge C1. At T0 (Figure 2) the electronic switch was closed and was acting as a short across C1. At T1 the computer "opened" the switch by grounding R4 through an output port. The constant current source then began to charge C1 at a linear rate, producing a ramp. At T2 the computer "closed" its switch by sending a logical "1" through a port and this ends the ramp. The relation between ramps and A/D conversion may be unclear at this point, but it will be explained later.

Each 339 IC contains four comparators. Each comparator has a + input, a - input and an output. If the voltage on the + input is greater than the voltage on the -input the output will be a logical "1." If the voltage on the -input is greater than the voltage on the +input the output will be a logical "0."

Following is an 8080 version of the conversion software for the Northstar Horizon. It is as follows: (Assembled for 01H:

```

0000          ; STORAGE FOR MASK AND RETURNED COUNT
0001  PUSH  PSW
0002  PUSH  H
0003  PUSH  B
0004  MVI  H,00          ; LOAD HL WITH STORAGE LOCATION
0005  MVI  L,00
0006  MVI  B,00          ; CLEAR COUNTER
0007  XRA  A              ; CLEAR ACCUMULATOR
0008  OUT  00            ; START RAMP
0009  IN  00              ; CHECK STATUS
000A  ANA  M              ; MASK OUT
000B  JNZ  001A          ; EXIT WHEN BIT=1
000C  INR  B              ; INCREMENT COUNT
000D  MOV  A,B
000E  CPI  FF            ; IS COUNT OVER 255?
000F  JC   001D          ; NO, LOOP
0010  MVI  A,00H         ; RESET RAMP
0011  OUT  00            ; SAVE COUNT
0012  POP  B
0013  POP  H
0014  POP  PSW
0015  RET

```

The following is a Northstar BASIC routine that will FILL the conversion software into memory:

```

1 FOR K=0 TO 255
2 READ I
3 FILL K,I
4 NEXT K
5 DATA 0,245,229,197,78,0,45,0,6,0,175,211,0,219,0,155,194,25
6 DATA 0,4,128,254,255,219,17,0,62,128,211,0,112,193,225,241,201

```

To use the A/D converter, after running the previous routine, you FILL location 0 with the appropriate bit mask. (1, 2, 4, 8, 16, 32, 64, or 128). You then CALL location 1. The value of the requested analog input will be in location 0. (Retrieve it with an EXAM statement).

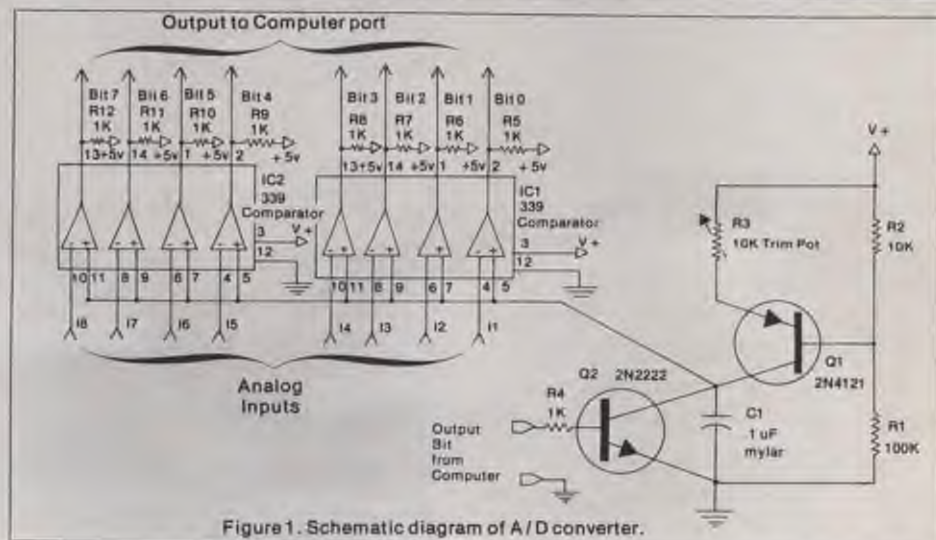


Figure 1. Schematic diagram of A/D converter.

Joysticks, con't...

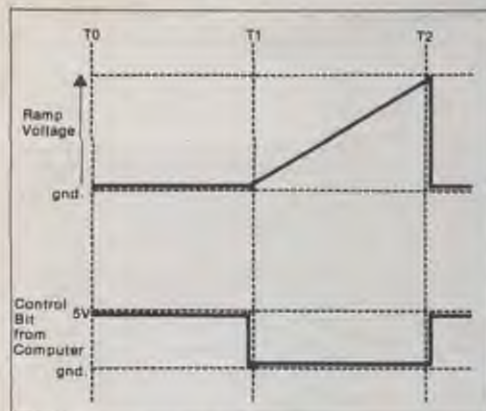


Figure 2. Timing diagram of control bit from computer and ramp from A/D converter.

To convert an analog signal to a digital signal, the analog signal is applied to the -input and the output from the ramp generator is fed into the +input. The computer, through software, records the time interval between the closure of the electronic switch and its sensing a logical "1" at the output of the appropriate comparator. The length of this interval is proportional to the magnitude of the analog voltage. If the analog voltage is 0, as soon as the ramp begins to increase, it will be greater than the voltage and the comparator will output a logical "1." The time interval would be quite short. If the analog voltage applied is 5V, however, the

ramp would have to be increasing for some time before it becomes greater than the analog input voltage. The time interval, then, would be comparatively long.

In Figure 3, the reason the ramp terminates almost immediately after it surpasses the analog input is because the computer has "closed" its switch. That is, the computer had already recorded the time interval and it no longer required the remainder of the ramp. A consequence of this process is that, unless the software compensates (through delay loops), a lower voltage will take less time to convert into a digital value than a higher voltage.

Construction

As a result of the low parts count in the converter, almost any construction technique can be used, including perfboard, PC board and wire-wrap. Parts placement is not critical. (I used a solderless breadboard to construct the prototype). In any case, note that the pull-up resistors (R5-R12) will be connected to the host computer's 5V line, not V+.

Testing and Interfacing

If a triggered oscilloscope is available, follow the testing procedure detailed in Figure 4. When you complete this, it is time to interface the A/D converter to your computer. First, connect the computer's ground to the A/D converter's ground and

1. Power up the converter. (Through batteries, power supplies, etc. The pull-up resistors R5-12 may be connected to V+ for this test.)
2. Apply a 200 Hz square wave to the base of Q2. (If you do not have a signal generator, a 555 pulse circuit will suffice.)
3. Connect the oscilloscope's vertical input to the collector of Q2.
4. Connect the oscilloscope's "external triggering input" to the square wave source. Adjust for a stable display.
5. The oscilloscope should display a sawtooth waveform. (R3 may have to be adjusted to achieve this.)
6. Connect the arms of a potentiometer to V+ and ground, and attach its wiper to the input of a comparator.
7. View the signal at the output of the same comparator.
8. As you adjust the knob on the potentiometer, the width of the displayed square wave will vary. At the knob's two extremes, a straight line may appear on the oscilloscope. This is normal.
9. If time permits, repeat steps 5-7 for the remaining seven comparators.

Figure 4. Triggered oscilloscope testing procedure.

connect the +12V line from the computer to V+ of the circuit. (If you would prefer not to utilize the computer's 12V supply, connect two 9V batteries, in series, between ground and V+.) Then, connect a wire from the pull-up resistors to the +5V supply of the computer. Now, connect the eight output bits from the converter to an eight bit input port on your computer. Finally, attach one bit of an output port to the unconnected lead of R4. The converter is now electrically interfaced. Software, however, is necessary for its operation.

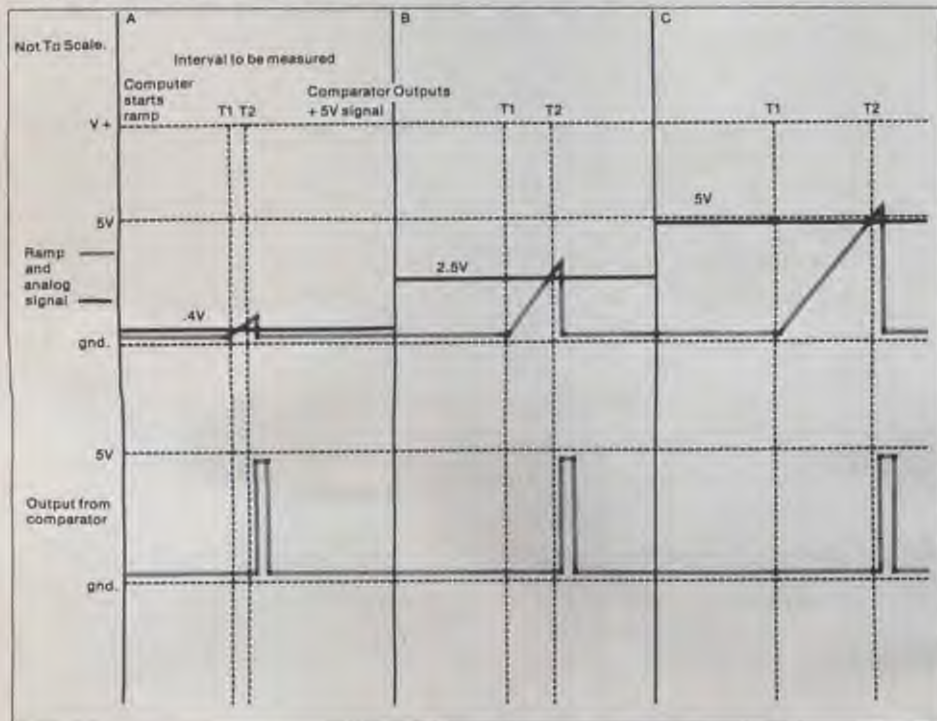


Figure 3. Timing diagram of ramp, analog input and output from comparator.



The Software

Due to the many different processors and programming languages in use, the conversion program is presented in the form of a flowchart. (refer to Figure 5). Normally, this flowchart would be implemented in machine language. A BASIC program would utilize the converter through the USR function. If the BASIC program requires a scaled value between, say, 0 and 15, the following type of statement is used: LET S = INT ((VALUE/255)*15) + 1.

Joysticks, con't...

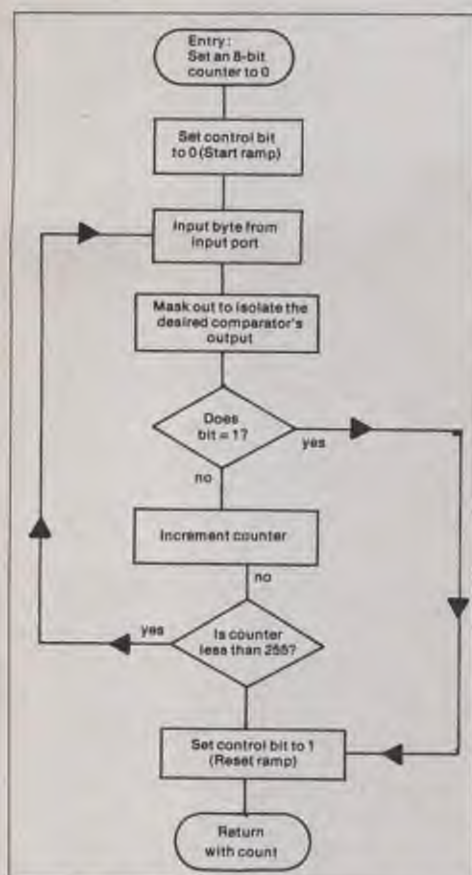


Figure 5. Flowchart of a machine language conversion program.

(VALUE represents the number returned by the conversion software, and S is the scaled result).

If you are not adept at machine language, there is an alternative method: By greatly increasing the value of C1, the ramp's rate of increase will slow down. This will allow a BASIC version of the conver-

sion software (using the INP and OUT functions) to operate. I do not recommend this technique because it might take several seconds for the BASIC conversion program to convert a voltage, as compared to only microseconds for a machine language program. Interestingly, a Z80 owner, programming in machine language, might have to decrease the value of C1, due to the high speed of his machine.

Once the speed of the converter is approximately equal to that of its companion software, R3 is used to precisely match them. First, set up a temporary routine that will call the conversion program, display the value of the analog input at channel one and then loop back and repeat. Then apply +5V to the corresponding input, input one. Adjust R3 to its minimum resistance, then begin to increase its value. Note that the displayed conversion value is increasing. When the displayed value passes 200, begin to slow down the rate at which you are turning the knob. When the value reaches 254, continue turning the knob on R4, but only enough to make the value 255. Then stop turning. the A/D converter is now operational. In conjunction with its associated software, it will convert an analog input voltage between 0 and 5V to a corresponding number from 0 to 255.

Applications

The most obvious application of this A/D converter is to digitize the position of a slide pot (paddle) or joystick (two-dimensional paddle). To do so, attach one arm of the potentiometer to +5V, one to ground and hook the wiper to an input channel. Since a joystick is made up of two potentiometers, two input channels would be used for it.

Many other applications are also possible. For example, the computer could use a thermistor to monitor the temperature. It could then record the temperature over a period of time, or perhaps act as an "intelligent" ther-

mostat. If the converter is utilized in conjunction with some type of moisture-sensing circuit, the computer could alert you when your basement floods. If you are not present, it could activate a sump pump.

The A/D converter can, if accurately calibrated, act as a test instrument. It could measure voltage or even capacitance. To measure capacitance, the computer would monitor the charge rate of the unknown capacitance in series with a known, fairly large, resistance. Using this data the computer could determine their time constant. Dividing the time constant in seconds by the resistance in ohms would yield the capacitance in Farads.



An A/D converter enables a digital computer to observe the real world, which is analog in nature, on its own terms. Information that was previously inaccessible to computer analysis can now be utilized in an ever increasing number of varied applications. The A/D converter is a tool whose value depends, like all other tools, upon the skill and imagination of its user. □



"...To every vendor who lowers his price I'm awarding this official bumper sticker..."

© Creative Computing



© Creative Computing

**RADIO SHACK COMPUTER OWNERS
TRS-80 MODEL I AND MODEL II**

TRS-80TM MONTHLY NEWSLETTER

- PRACTICAL APPLICATIONS
- BUSINESS
- GAMBLING • GAMES
- EDUCATION
- PERSONAL FINANCE
- BEGINNER'S CORNER
- NEW PRODUCTS
- SOFTWARE EXCHANGE
- MARKET PLACE
- QUESTIONS AND ANSWERS
- PROGRAM PRINTOUTS
- AND MORE

**PROGRAMS AND ARTICLES PUBLISHED IN OUR FIRST 12 ISSUES
INCLUDE THE FOLLOWING:**

- A COMPLETE INCOME TAX PROGRAM (LONG AND SHORT FORM)
- INVENTORY CONTROL
- STOCK MARKET ANALYSIS
- WORD PROCESSING PROGRAM (FOR DISK OR CASSETTE)
- LOWER CASE MODIFICATION FOR YOUR VIDEO MONITOR OR PRINTER
- PAYROLL (FEDERAL TAX WITHHOLDING PROGRAM)
- EXTEND 16-DIGIT ACCURACY TO TRS-80 FUNCTIONS (SUCH AS SQUARE ROOTS AND TRIGONOMETRIC FUNCTIONS)
- NEW DISK DRIVES FOR YOUR TRS-80
- PRINTER OPTIONS AVAILABLE FOR YOUR TRS-80
- A HORSE SELECTION SYSTEM***ARITHMETIC TEACHER
- COMPLETE MAILING LIST PROGRAMS (BOTH FOR DISK OR CASSETTE SEQUENTIAL AND RANDOM ACCESS)
- RANDOM SAMPLING***BAR GRAPH
- CHECKBOOK MAINTENANCE PROGRAM
- LEVEL II UPDATES***LEVEL II INDEX
- CREDIT CARD INFORMATION STORAGE FILE
- BEGINNER'S GUIDE TO MACHINE LANGUAGE AND ASSEMBLY LANGUAGE
- LINE RENUMBERING
- AND CASSETTE TIPS, PROGRAM HINTS, LATEST PRODUCTS COMING SOON (GENERAL LEDGER, ACCOUNTS PAYABLE AND RECEIVABLE, FORTRAN-80, FINANCIAL APPLICATIONS PACKAGE, PROGRAMS FOR HOMEOWNERS, MERGE TWO PROGRAMS, STATISTICAL AND MATHEMATICAL PROGRAMS (BOTH ELEMENTARY AND ADVANCED) AND

FREE WORD PROCESSING PROGRAM (Cassette or Disk)
For writing letters, text, mailing lists, etc., with each new subscriptions or renewal.



LEVEL II RAM TEST -

Checks random access memory to ensure that all memory locations are working properly.

SEND FOR OUR 36 PAGE SOFTWARE CATALOG (INCLUDING LISTINGS OF HUNDREDS OF TRS-80 PROGRAMS AVAILABLE ON CASSETTE AND DISKETTE). \$2.00 OR **FREE** WITH EACH SUBSCRIPTION OR SAMPLE ISSUE.

COMPUTRONICS
MATHEMATICAL APPLICATIONS SERVICE

Box 149

New City, New York 10956

ONE YEAR SUBSCRIPTION \$24

TWO YEAR SUBSCRIPTION \$48

SAMPLE OF LATEST ISSUE \$ 4

START MY SUBSCRIPTION WITH ISSUE

(#1 - July 1978 • #7 - January 1979 • #12 - June 1979)

NEW SUBSCRIPTION _____ RENEWAL _____

CREDIT CARD NUMBER _____ EXP. DATE _____

SIGNATURE _____

NAME _____

ADDRESS _____

*** ADD \$6/YEAR (CANADA, MEXICO) - ADD \$12/YEAR AIR MAIL - OUTSIDE OF U.S.A., CANADA & MEXICO ***



24 HOUR
ORDER
LINE
(914) 425-1535



CIRCLE 134 ON READER SERVICE CARD

A simple telephone dialer BASIC program for the North Star, TRS-80 and other popular systems.

Telephone Dialer

Gene Christianson




Have you ever wished you owned one of those fancy phone dialers which store 32 numbers? Do you find yourself redialing the same busy number over and over again until your finger is about ready to fall off? How would you like to store several hundred of your favorite phone numbers by name or number? For about three dollars in parts, one bit on a parallel port and the program included in this article you can do just that!

Software

The program is written in North Star BASIC and with a few changes, described at the end of the article, it will run on TRS-80 or similar BASIC. The program uses an if-then lookup table to convert a name label to a number. On input the computer will take up to 11 digits or characters. Starting at Line number 63 the program converts the input string to a number and pulses a small relay (see Figure 1) to do the dialing. You will have to play with the timing loops at line numbers 70, 83, 87 and 102 for your computer's speed and local phone system. My timing works well with an 8080-A running at 2 Mhz. and a very fast touch tone phone system. Line number 89 will wait for long distance dial tone if the first number in the dialing sequence is a "1." When you hear the tone, just hit 'RETURN.'

Hardware

A 6-9 volt SPDT relay from Radio Shack sells for \$3.00 and is the only hardware needed. Almost any low voltage relay will do the trick. Make sure the current rating does not exceed the rating of the port. Most latched ports will sink about 50 mA. Use the LSB (bit 0) of a latched parallel port. Hook one leg of the relay coil to the +5 volt supply on the board that the parallel port is on. Hook the other end to the first bit (bit 0) on the port. The relay contacts are in series with the phone line. I broke

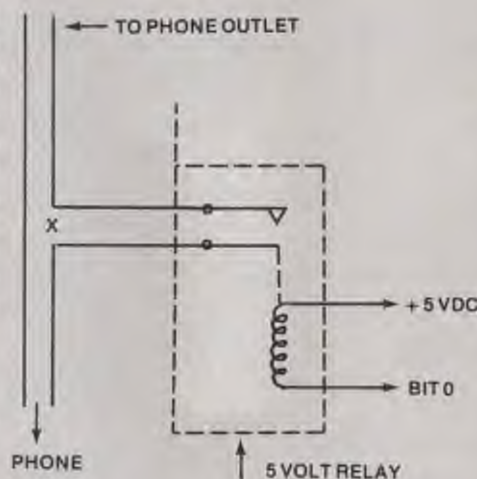

the red wire and spliced the normally open contacts between the break. You will want to put a SPST switch across the relay contacts. This overrides the relay when the computer is off so you may use the phone normally. Check local phone restrictions, you may need a DAA to connect the relay. You can check your installation before running software by sending OUT statements to the port the relay is on. In the immediate mode type 'OUT (port #), 1'. With the override switch off this will turn the phone on. Type OUT (port #), 0 and you should hear the phone hang up. Set P1 in line number 18 to the port address you are using for the relay.

```

1 REM ***** PHONE DIALER *****
2 REM
3 REM COPYRIGHT 1979 BY GENE CHRISTIANSON
4 REM BOX 267
5 REM SANTA BARBARA, CA 93102
6 REM PHONE 805-682-5693
7 REM
8 REM THIS PROGRAM MAY BE USED FOR NON COMMERCIAL USE
9 REM
10 REM REVISION 6/15/79
11 REM
12 REM
13 REM ***** LIST OF VARIABLES *****
14 REM
15 REM F= ON/OFF HOOK
16 REM I= LOCAL VARIABLE
17 REM P1= PORT OF DIALER
18 P1=110
19 REM M= A$(POSITION)
20 REM N= NUMBER IN QUE BEING DIALED
21 REM T= PORT OF CONSUL
22 T=2
23 REM A$= NUMBER BEING CALLED
24 REM B$= LABEL ASSOCIATED WITH PHONE #
25 REM Z$= LOCAL ONLY
26 REM
27 REM
28 DIM A$(11), B$(11)
29 GOSUB 114 \ REM CLEAR SCREEN
30 GOSUB 106 \ REM MAKE SURE LINE IS ON HOOK!
31 INPUT "NAME OR NUMBER TO DIAL > ", A$
32 IF LEN(A$)=0 THEN 30
33 B$=C$
34 IF A$(1,1)>"9" THEN 120 \ REM LOOK UP STRING
35 REM
36 REM THIS IS THE RE-ENTRY POINT FROM ASCII LOOK UP
37 REM
38 GOSUB 114
39 IF F=1 THEN !***** OFF HOOK *****\!
40 IF F=0 THEN !D N H O O K *\!
41 FOR I=1 TO LEN(A$)
42 PRINT A$(I,I)+ " ",
43 IF LEN(A$)=7 AND I=3 THEN !* - *,
44 IF LEN(A$)>8 AND I=1 THEN !* - *,

```

Gene Christianson & Associates, Box 267, Santa Barbara, CA 93102.

Dialer, con't...

```

45 IF LEN(A$)>8 AND I=4 THEN !*~ *,
46 IF LEN(A$)>8 AND I=7 THEN !*~ *,
47 IF LEN(A$)=8 AND I=1 THEN !*~ *,
48 IF LEN(A$)=8 AND I=4 THEN !*~ *,
49 NEXT
50 !* ~*,B$ \ REM PRINT LABEL WITH NUMBER IT FOUND
51 PRINT
52 PRINT
53 FOR I=0 TO LEN(A$) \ !*~ *, \ NEXT
54 IF LEN(A$)>8 THEN !*~ *,
55 !* OK? CR= DIAL / KILL N= NEW *,
56 Z$=INCHAR$(T)
57 GOSUB 114 \ REM CLEAR SCREEN
58 IF Z$= "N" THEN 106
59 IF F=1 THEN 106
60 I=0 \ D=0
61 GOSUB 97 \ REM PICK UP PHONE AND HOLD A MOMENT
62 REM
63 REM THIS STARTS THE DIAL SEQUENCE
64 REM
65 !*D I A L I N G S T A R T E D * \ !
66 FOR M=1 TO LEN(A$) \ REM CONVERT STRING
67 N= VAL(A$(M,M)) \ REM TO NUMBER AND DIAL
68 IN,
69 D=0
70 FOR Q=1 TO 250 \ NEXT \ REM THIS WAITS BETWEEN PULSES
71 IF LEN(A$)=7 AND M=3 THEN !*~ *,
72 IF LEN(A$)>8 AND M=1 THEN !*~ *,
73 IF LEN(A$)>8 AND M=4 THEN !*~ *,
74 IF LEN(A$)>8 AND M=7 THEN !*~ *,
75 IF LEN(A$)=8 AND M=1 THEN !*~ *,
76 IF LEN(A$)=8 AND M=4 THEN !*~ *,
77 IF N=0 THEN N=10
78 REM
79 REM THIS IS THE PULSE SUBROUTINE
80 REM
81 FOR D= 1 TO N
82 OUT P1,0 \ REM OPEN CONTACTS ON RELAY
83 FOR I=1 TO 10 \ NEXT
84 REM
85 REM
86 OUT P1,255 \ REM CLOSE CONTACTS ON RELAY
87 FOR I=1 TO 20 \ NEXT
88 NEXT D
89 IF M=1 AND N=1 THEN INPUT !*~*,Z$ \ REM THIS HOLDS FOR LONG
90 REM \ REM THIS HOLDS FOR LONG
91 REM \ REM THIS HOLDS FOR LONG
92 NEXT M
93 PRINT CHR$(7)
94 GOSUB 114
95 GOTO 39 \ REM END OF SEQUENCE
96 REM
97 REM THIS IS THE PICK UP SET
98 REM
99 F=1 \ REM THIS FLAGS OFF HOOK CONDITION
100 !*P I C K I N G U P L I N E ...*\
101 OUT P1,255 \ REM PICK UP LINE
102 FOR I= 1 TO 200 \ REM WAIT A WHILE
103 NEXT
104 RETURN
105 REM
106 REM KILL CALL IN PROGRESS
107 REM
108 OUT P1,0
109 F=0 \ REM THIS FLAGS ON HOOK
110 GOSUB 114
111 IF Z$=CHR$(13) THEN 39
112 GOTO 31
113 REM
114 REM THIS CLEARS SCREEN ON SORROD
115 REM
116 ! CHR$(27),*~*,* ~*
117 !CHR$(27),*~*,*~*,* ~*
118 RETURN
119 REM
120 REM THIS IS THE LOOK UP TABLE FOR NAME TO NUMBER CONVERSION
121 REM
122 B$=A$ \ REM THIS CLEARS LABEL STRING
123 IF A$="HELP" THEN A$="911"
124 IF A$="TIME" THEN A$="9660611"
125 IF A$="DOCTOR" THEN A$="6879444"
126 IF A$="LA INFO" THEN A$="12135551212"
127 IF A$="SF INFO" THEN A$="14155551212"
128 IF A$="SB INFO" THEN A$="15551212"
129 IF A$="KABC" THEN A$="12135205222"
130 IF A$(1,1)>"9" THEN B$=C$ \ REM CLEAR LABEL
131 IF A$(1,1)>"9" THEN 31 \ REM GO HOME IF NOT FOUND
132 GOTO 36

```

Using the system

Just add your names and phone numbers to the IF-THEN list starting at line 123 and you're ready to go. The list will only be limited by the amount of memory your machine has. Remember to resave the program as you add more numbers and names. Simply type a name or number and hit RETURN. The software checks to see if you are giving it a name or a number. If it gets a number it starts right into the dialing loop. If it is trying to match a name you have typed in, it goes to the lookup table at line number 120 and tries to find a match. In the event the software finds no match with the name you submit, it will just return to the input loop in line number 31.

Changes for TRS-80 style BASIC

The short form for PRINT in North Star BASIC is an exclamation mark, which will have to be changed to "?" (or something else if your BASIC uses a shorthand for PRINT). Change the following lines to read:

```

34 IF LEFT$(A$,1) > "9" THEN 120
42 PRINT MID$(A$,1,1) + "- ",
56 INPUT " ",Z$
76 N = VAL(MID$(A$,M,M))
130 IF LEFT$(A$,1) > "9" THEN
B$ = C$ \ REM CLEAR LABEL
131 IF LEFT$(A$,1) > "9" THEN
31 \ REM GO HOME IF NOT
FOUND

```

For those with an aversion to keying in programs from magazines, the phone dialer is available for \$10 on North Star diskette from Gene Christianson & Associates, Box 267, Santa Barbara, CA 93102.

The more adventurous programmers might consider modifying the program to log phone calls (for accounting purposes) and to provide an interactive method of entering and changing numbers. □

"DEAR COMPUTER"

Dear Computer:

I recently ordered a female robot from Texas Robotics. In most ways she (it) performs satisfactorily. However, the other night she (it) went out without asking my permission. I later learned that she (it) had gone to a N.O.W. meeting. Does she (it) have the right to do this?

— Disgruntled Bachelor

Dear Chauvinist:

Tough break old chap. Women's lib is here in spirit as well as in fact. You might try an inflatable doll.

Steve M. Aldridge

Teacher-Made Tests: Debugging & Evaluating

Douglas W. Green
Dr. Jeffrey Hering



Using the classroom computer for administering tests is in fairly widespread use today. Now teachers will be able to evaluate the effectiveness of those tests...and find out where and how to improve them.

In theory, student evaluations determined from teacher-made tests are supposed to show how well each learning objective was taught and how well each student is performing relative to the entire class. In practice, tests composed by teachers are used to generate necessary grades and, if the scores are acceptable, forgotten until the next time. One reason for this is the vast amount of time required to do the type of statistical analysis necessary to locate the "bugs" in one's lesson plans as well as the tests themselves.

The lesson plan "bugs" may be spotted by the results of an item analysis of the test. This may be nothing more than a list of how many students missed each question. In the case of multiple choice tests, it can also include the frequency of selection for each of the available answers. Armed with this information the instructor can then try to determine if the questions missed most often were a result of inadequate teaching of the objective being tested, or if the concepts involved were beyond the mental maturity level of the students being tested.

Finding the bad questions in a test is another, more complex problem from a statistical point of view. A bad question can be defined as one answered correctly by students possessing less understanding. It is desirable to have test questions that will be answered correctly more often by the students who understand the material than by those who do not. Unfortunately, this is not always the case. To find the "klunkers" among the questions on a test, a statistic known as the point biserial coefficient can be used.

cient can be used.

The coefficient can be determined for each question on a test using the equations presented in Figure 1. The values of r will vary from +1 to -1 without ever reaching these extremes. If the students answering a question correctly have a higher average score on the test than the students missing the question, r will be positive. From the viewpoint of the test maker a positive r value is desirable, although it may not be significant if it is too low. A t -test, using the formula $t = r(N-2)/(1-r^2)$, can be used to test for significance by referencing a standard t -test table. In this equation, N is the number of tests, $N-2$ is the number of degrees of freedom and the sample distribution is considered to be two-tailed. This t -test is not a part of the program presented here, however.

Equations Needed To Calculate The Point Biserial Correlation Coefficient

$$r_{pbi} = \frac{(\bar{X}_p - \bar{X}_q)}{S.D.} \sqrt{pq}$$

r_{pbi} = point biserial coefficient

$\bar{X}_p$ = the average grade of the students answering a question correctly

$\bar{X}_q$ = the average grade of the students answering a question incorrectly

p = the fraction of the students answering a question correctly

q = the fraction of the students answering a question incorrectly

$S.D.$ = the value of the standard deviation that can be found using the equation below

$$S.D. = \sqrt{\sum (X - \bar{X})^2 / N}$$

X = the test score for a given student

$\bar{X}$ = the average of all of the scores

N = the number of students in the sample

Figure 1.

The more positive the value of r , the better job the question did in separating students who know the concepts being tested from those who do not. An r value of zero implies that the question did not discriminate at all, which is the case when everyone gives the same answer for a question. Negative values indicate that the question did just the opposite of what it should have done. One

thing that any test-maker does not want is the poorer students answering correctly more often than the better students. This is what a negative value of r indicates.

The Program

The program presented here has been designed to generate an item analysis along with the value of the point biserial correlation coefficient for each question. It was written using a Wang 2200 with 8K bytes of memory, and makes use of Wang's version of BASIC. It can analyze the results of any exam where the questions have answers that are either correct or incorrect. Specifically, however, it was designed for exams composed of multiple choice type questions having four choices each. It also allows for exams that are composed of two parts in which the second part of the test is composed of several optional groups of questions. This is the type of exam given by the New York State Board of Regents in all of its science courses. The chemistry exam, for example, contains 60 questions on Part One that every student must answer. Part Two is composed of nine groups that contain five questions each. Here each student must select any six of the nine groups for a total of 30 questions. The program was designed specifically to allow for the variety of answers such an exam presents, but it works just as well for shorter tests that have only one part.

The program contains nine sections that each perform an integral part of the task (Figure 2). The first part involves setting up or dimensioning the data tables. Matrix AS has been dimensioned to contain up to 120 answers for each of 30 students, along with the correct answers. The statement $DIM AS(120,31)$ means that the computer saves space in its memory for a table of alphanumeric data composed of 120 rows and 31 columns, and that each piece of data is limited to values composed of a single character. The table is alpha-

Douglas Green & Dr. Jeffrey Hering, Cortland Junior-Senior High School, Science Dept., Valley View Drive, Cortland, NY 13045.

Teacher-Made, con't...

numeric so that it will take up less space in the memory. A comparable data table composed of numeric values would occupy 13 times as much space. In addition to the A\$ table, there is also a list called C\$ that contains the scores of each student and a list called C that contains the number of students that select each of the groups of questions on Part Two of the exam.

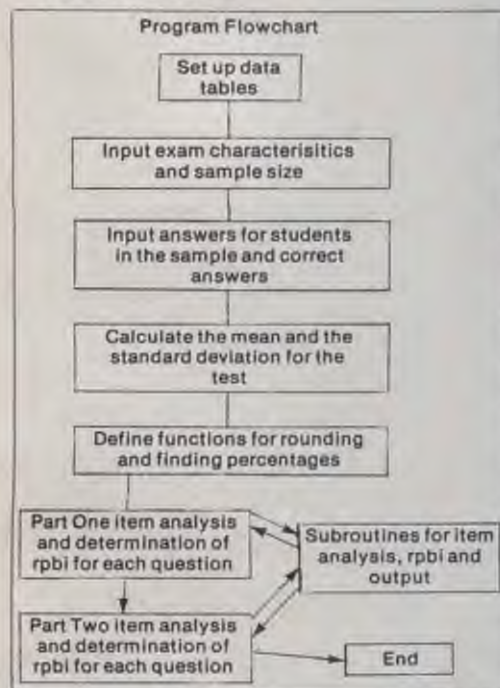


Figure 2.

The next segment of the program contains the input statements that provide the computer with the exact nature of the test. The number of parts and the makeup of each are supplied by the operator when these statements are executed. This is followed by the sections containing the input statements that ask the operator for the answers of each of the students in the sample of tests being analyzed, along with the correct answers. After the final pieces of data have been entered, the computer encounters the statements that lead it through the processing of the data and the production of the desired output.

The first portion of this task involves the calculation of the mean, or the average score on the test and the standard deviation. This is a measure of how far the scores tend to be spread from the mean. The larger the value of the standard deviation, the farther the scores are spread from the average score. Since numeric operations like addition and division cannot be performed on alpha-

numeric variables, the data must first be converted to numeric form before it can be operated on. This involves the use of the CONVERT function. If a statement reads CONVERT C\$(N) to X, it simply means that the Nth value in the alphanumeric list called C\$ is to be converted to the numeric value X. This must also be done during the item analysis segment of the program.

As processing continues, the program contains statements that involve several user defined functions. These make use of the DEFFN statement and are used to make sure that the output of the program is properly rounded off and that the number of students selecting each of the available choices is converted to a percentage of the total. Next the statements that do the item analysis for Part One are encountered. The program instructs the computer to evaluate one question at a time by making use of nested loops with an inner loop that evaluates each question and an outer loop that advances the analysis from one question to the next. After the answer for a student is converted to numeric form, it is evaluated by an ON...GOSUB statement. The numbers after the word GOSUB are the statement numbers that contain subroutines to be called, depending on the value of the variable being evaluated. If the value is one, then the subroutine beginning at the first statement number is called and so on. In this manner, the number of 1's, 2's, 3's, and 4's are counted up by the four, short subroutines found at the end of the program. This part of the program also contains a statement that calls the subroutine that determines the value of r. Finally, the results of the analysis of each question are printed out. To do this, a PRINT USING statement is used. If a statement reads PRINT USING, 40,X,Y,Z, the computer would print the values for X, Y and Z according to the format given in statement number 40. Statement 40 in this case would be called an image statement and might look like this: 40 % ###.# ###.# ###.#. The percent sign tells the computer that it has encountered an image statement. The number signs (#) are used to tell the computer how the values to be printed should be arranged in the program's output.

The item analysis for Part Two proceeds in much the same way with a few exceptions. First, the number of each question is determined by an equation using the variables that were input to describe the number of questions in each part of the exam and assigned to the variable K. Second, if

a question was not selected, it must be skipped over and this is done by an IF...THEN statement that looks like: IF A\$(K,M) = " " THEN 860. If a question was not answered, the value stored for it in the A\$ matrix will be equal to a space. An IF...THEN statement of the form given does nothing more than look for spaces so the computer will not be sending out an error message when it tries to unsuccessfully convert a space to a numeric value.

The final part of the program is the subroutine that determines the value of r for each question. This is com-

Variables Used In The Program And Their Meanings:

- A counter for the number of 1's in item analysis A\$() 120 by 31 matrix that holds the answers given by the students along with the correct answers
- B counter for the number of 2's in item analysis
- C counter for the number of 3's in item analysis
- C() list that counts the number of students who select each of the groups on Part Two of the test.
- C\$() list of the scores for up to 30 students
- D sum of the grades for the students who answered each question correctly
- D1 number of students who answered each question correctly
- D2 average grade of the students who answered each question correctly
- D3 counter for the number of 4's in item analysis
- E sum of the grades for the students who answer each question incorrectly
- E1 number of students who answered each question incorrectly
- E2 average grade of the students who answered each question incorrectly
- F sum of all of the grades
- G number of the group being input and a loop counter
- G2 number of groups on Part Two of the exam
- G3 number of groups on Part Two that each student must answer
- H loop counter
- I standard deviation
- J counter used in the determination of the standard deviation
- K question number for the questions in Part Two
- L mean of all the scores
- M loop counter
- N loop counter
- P fraction of students answering a question correctly
- Q fraction of students answering a question incorrectly
- Q1 number of questions on Part One of the test
- Q2 number of questions in each group on Part Two of the exam
- R number of students selecting a given question
- R1 value of the point biserial coefficient for each question
- S number of students in the sample
- W dummy variable used in the user-defined functions
- X numeric variable use to hold individual grades and choices during determination of the mean, standard deviation, item analysis, and point biserial coefficient

Figure 3

Teacher-Made, con't...

posed of a loop that compares the answer given by each student selecting each question to the correct answer. After this is done, the student's score is either added to the scores of the students who missed the question or to the scores of the students who answered the question correctly. The number of students in each category are also counted before the loop is finished. Next, the average grades of the students in each group are determined, along with the percentage in each. With all of the preliminaries out of the way the equation for the calculation of r is finally reached. To help follow the meaning of the program the variables used are defined in Figure 3.

Sampling The Population

Ideally, the classroom teacher should use a random sampling procedure to select the sample of tests for evaluation from the total population. If the members of the population are listed in a grade book, they can be numbered consecutively. When you have determined the number of students to be sampled, divide the total number of students by this number. If you get a decimal, increase the value to the next highest integer. This integer will tell you which students to pick from the list. If the integer is 5, then choose every 5th name on the list. This method, known as systematic sampling, will produce a sample that can be regarded as random for most practical cases.

Other methods of selecting the sample could involve entering the student numbers on slips of paper and drawing them from a container, or reading the numbers of the students to be used from table of random numbers which can be found in most statistics texts. If time is a factor and the results are not being prepared for publication, a number of student papers can be selected from each class as long as the papers have been well shuffled.

For the statistic being used, the distribution is approximately normal for samples of 30 or more. This means that there is little value to be gained by evaluating more than 30 samples, especially if entering the data is a time-consuming process. If the population is less than 30 then the entire population should be used. If 30 tests are used, then the value of r is significant at the 0.5 level if it is equal to or greater than 0.36.

Entering Data

For the user of this program the process of entering data is rather straightforward. The computer will

```

10 REM * SET UP DATA TABLES *
20 REM *****
30 DIM A$(120,31),C$(30),G$(10)
40 REM * ENTER DATA DESCRIBING EXAM *
50 REM *****
60 INPUT "HOW MANY STUDENTS? MAX 30",S
70 PRINT "THE MAXIMUM NUMBER OF QUESTIONS ON THE EXAM IS 120"
80 INPUT "HOW MANY QUESTIONS IN PART I",Q1
90 INPUT "HOW MANY GROUPS IN PART II",G2
100 IF G2 = 0 THEN 150
110 INPUT "HOW MANY QUESTIONS IN EACH GROUP",Q2
120 INPUT "HOW MANY GROUPS MUST EACH STUDENT ANSWER",G3
130 REM * INPUT DATA FOR EACH STUDENT *
140 REM *****
150 FOR N = 1 TO S
160 FOR M = 1 TO Q1
170 PRINT "STUDENT";N;"QUESTION";M
180 INPUT A$(M,N)
190 NEXT M
200 IF G2 = 0 THEN 300
210 PRINT "STUDENT NO.":N
220 FOR H = 1 TO G3
230 INPUT "GROUP#";G
240 C(G) = C(G)+1
250 FOR Q = (Q2*G+Q1-Q2+1) TO (Q2*G+Q1)
260 PRINT "QUESTION#";Q
270 INPUT A$(Q,N)
280 NEXT Q
290 NEXT H
300 INPUT "ENTER GRADE",C$(N)
310 STOP "ENTER ANY CHANGES FOR THIS STUDENT IN IMMEDIATE MODE."
320 NEXT N
330 REM * ENTER CORRECT ANSWERS *
340 REM *****
350 FOR N = 1 TO Q1+G2*Q2
360 PRINT "ENTER CORRECT ANSWER FOR QUESTION NUMBER";N
370 INPUT A$(N,S+1)
380 NEXT N
390 STOP "ANY CHANGES"
400 REM * MEAN AND STANDARD DEVIATION *
410 REM *****
420 FOR N = 1 TO S
430 CONVERT C$(N) TO X
440 F = F+X
450 NEXT N
460 L = F/S
470 FOR N = 1 TO S
480 CONVERT C$(N) TO X
490 J = J+(L-X)^2
500 NEXT N
510 I = (J/S)^.5
520 REM * DEFINE FUNCTIONS *
530 REM *****
540 DEFN1(W) = INT((W*100/S)+.5)
550 DEFN2(W) = INT((W*100/C(G))+.5)
560 DEFN3(W) = INT((W*100+.5)/100)
570 DEFN4(W) = INT((W*100+.5))
580 REM * ITEM ANALYSIS FOR PART I *
590 REM *****
600 GOSUB 1360
610 FOR N = 1 TO Q1
620 A,B,C,D3 = 0
630 FOR M = 1 TO S
640 CONVERT A$(M,N) TO X
650 ON X GOSUB 1280,1300,1320,1340
660 NEXT M
670 GOSUB 940
680 Z### ### ### ### ### ### H.## ###
690 Z### ### ### ### ### ### ### #####
700 PRINT USING #80,N,FN1(A),FN1(B),FN1(C),FN1(D3),A$(N,S+1),FN3(R1),FN4(P)
710 NEXT N
720 REM * ITEM ANALYSIS FOR PART II *
730 REM *****
740 IF G2 = 0 THEN 1230
750 FOR G = 1 TO G2
760 A,B,C,D = 0
770 PRINT HEX(0A0E);"GROUP";G;"SELECTED BY";FN1(C(G))
780 GOSUB 1360
790 FOR H = 1 TO Q2
800 A,B,C,D3 = 0
810 FOR M = 1 TO S
820 K = ((G-1)*Q2+Q1+H)
830 IF A$(K,M) = " " THEN 860
840 CONVERT A$(K,M) TO X
850 ON X GOSUB 1280,1300,1320,1340
860 NEXT M
870 GOSUB 940
880 PRINT USING #80,K,FN2(A),FN2(B),FN2(C),FN2(D3),A$(K,S+1),FN3(R1),FN4(P)
890 NEXT H
900 NEXT G

```



```

910 GOTO 1230
920 REM * Rpbs AND % CORRECT *
930 REM *****
940 E, E1, D, D1, R = 0
950 FOR M = 1 TO S
960 IF K = 0 THEN 980
970 N = K
980 IF A$(N,M) = " " THEN 1080
990 R = R + 1
1000 IF A$(N,M) = A$(N,S+1) THEN 1050
1010 CONVERT C$(M) TO X
1020 E = E + X
1030 E1 = E1 + 1
1040 GOTO 1080
1050 CONVERT C$(M) TO X
1060 D = D + X
1070 D1 = D1 + 1
1080 NEXT M
1090 IF D1 = 0 THEN 1170
1100 IF E1 = 0 THEN 1170
1110 D2 = D/D1
1120 P = D1/R
1130 E2 = E/E1
1140 Q = E1/R
1150 R1 = ((D2-E2)/I)*((P*Q)*.5)
1160 GOTO 1220
1170 R1 = 0
1180 IF D1 = 0 THEN 1210
1190 P = 1
1200 GOTO 1220
1210 P = 0
1220 RETURN
1230 PRINT "MEAN = "; FN3(L)
1240 PRINT "STD. DEV. = "; FN3(I)
1250 GOTO 1390
1260 REM * COUNTERS FOR ITEM ANALYSIS *
1270 REM *****
1280 A = A+1
1290 RETURN
1300 B = B+1
1310 RETURN
1320 C = C+1
1330 RETURN
1340 D3 = D3+1
1350 RETURN
1360 SELECT PRINT 215
1370 PRINT USING 690, "NO.", "X1", "X2", "X3", "X4", "ANS", "Rpbs", "%CORRECT"
1380 RETURN
1390 END

```

print the number of the student and the number of the question prior to the input of each piece of data. For this reason, it might be a good idea to number the tests in your sample. Even though the user needs to make two consecutive mistakes to enter an

erroneous piece of data, it does seem to happen. To correct such mistakes, all the user need do is continue on until the last piece of data has been input for that student. The computer then encounters a STOP statement and puts the system into immediate

mode. Now the operator types in the corrections. For example, suppose the operator gave the wrong input for question 15 for student 7, and that the answer that should have been input was choice 3. By typing A\$(15, 7) = "3" and executing, the error has been corrected. Once this has been done, the operation of the program may be continued and the answers of the next student can be input.

For systems that are not interactive, the program can be revised with little difficulty so that data can be supplied by READ statements rather than INPUT statements. Some operators of interactive systems might even consider this a more desirable method for supplying data for the program. Better yet would be a system composed of some sort of mark sense reader that could read the student's choices directly from their answer sheets. Although such systems exist in the larger computer centers they may not be as available to most teachers as the smaller systems similar to the one this program was developed for.

If there are true/false, fill in the blank, or other non-multiple choice questions, they can be handled by assigning an answer a 1 if the question is correct and 2 if it is incorrect. Although the item analysis for such questions will provide less information, the value of r will be just as meaningful.

Interpreting The Output

This is where the actual debugging takes place (See Figure 4). By looking for the questions that were missed more often than not and by looking for low or negative values of r , a teacher can serve to improve the test itself as well as the lesson plans that lead up to it. The questions having low, percent correct values show where further teaching time should be spent. The wrong choices selected most frequently may point to common misunderstandings that can be addressed during future classes. Questions having negative values of r should be discarded or written again. They are usually questions where too much knowledge proved to be a dangerous thing. Teachers do not usually intend to construct tricky test questions but somehow they seem to show up no matter how much time you spend preparing them. By using a computerized analysis such as this one, you can improve your overall teaching effectiveness while doing a better and fairer job of discriminating between the students who have reached your teaching objectives and those who have fallen short. □

Sample Output							
NO.	%1	%2	%3	%4	ANS	Rpbs	% CORRECT
1	20	10	10	60	4	0.45	60
2	6	57	19	20	2	0.21	57
3	0	5	90	5	3	-0.11	90
4	75	10	10	5	1	0.39	75
5	42	35	13	10	2	0.54	35
GROUP 1 SELECTED BY 80%							
No.	%1	%2	%3	%4	ANS	Rpbs	% CORRECT
6	100	0	0	0	1	0.00	100
7	50	25	25	0	4	0.00	0
GROUP 2 SELECTED BY 60%							
NO.	%1	%2	%3	%4	ANS	Rpbs	% CORRECT
8	72	5	5	18	1	0.67	72
9	15	5	7	73	4	0.02	73
GROUP 3 SELECTED BY 60%							
No.	%1	%2	%3	%4	ANS	Rpbs	% CORRECT
10	82	3	4	11	1	0.54	82
11	5	10	54	31	4	0.74	31
MEAN = 5.54 STD. DEV. = 2.54							
This is the output for a two part multiple choice test where each student answers all five questions on part one and two of the three groups on part two. By looking at the column labeled Rpbs, one can tell: that question 3 was missed more often by the better students, questions 6 and 7 did not discriminate at all, and the Rpbs value for question 9 is very low. These are the questions that should be considered for revision the next time the test is given.							

Figure 4



Adventure

Ben Moser

Adventure is one of the only classic computer games to develop a legendary reputation solely by word-of-mouth. The original version (by Crowthers and Woods) exists in various FORTRAN incarnations on timesharing systems, but unfortunately these are not easily transported to a personal computer because the game runs entirely in memory and won't fit in 64K.

However, there have been conversions of Adventure to mini and micro-computers. The version published here is in HP3000 BASIC and uses disk files to store descriptions and messages. Conversion to a micro-computer is probably possible but will require a fully expanded machine. (48K of memory and at least 128K of disk storage would be a good start). Naturally, you can scale the game down or add your own features once you've figured out how it works.

If you don't want to do all the typing and modification, Adventure is available on cassette and floppy disk from several software companies (including Creative Computing Software). There is a bi-lingual version of the original Adventure written in SAM76 language, and several different Adventure-style games written by Scott Adams. The Adams games (see Creative Computing, August 1979) are actually one very generalized Adventure interpreter, and then an Adventure database, which allows for the creation of many different games. [In comparing the Adams Adventures to the Crowthers and Woods original, the original game has longer descriptions and seems a bit more awesome, but the Scott Adams Adventures require more thinking and the themes are more sophisticated (or at least different than) the original.] — SN

Adventure Background

I originally played Adventure on one of MIT's timeshare computers. One day last year I decided to try to write a BASIC version of the game. I played MIT's game so much that I mapped most of the game and had lists of room names, directions in which to move and names of objects.

Ben Moser, Rt. 2, Box 283-D, Stanley, VA 22851.

Using my data, I wrote a HP2000 version that was full of bugs and was generally a total flop. Last fall (November 1978) I gained access to HP3000 BASIC, which allows a program approximately four times as large as the HP2000. Also, I had use of a large amount of disk space. Since HP3000 BASIC is a superset of that of the 2000, I was able to write a very good imitation (in my opinion) of MIT's game.

The game of Adventure was originally conceived at MIT by Don Woods and Willie Crowther. I've taken their game layout and created a program that does most of the things their program does, and I have added little in the way of innovative ideas (i.e., new rooms, objects, villains, etc.).

The latest version of Adventure/3000 seems to work very well. However, it may still contain some bugs. Unfortunately, I can no longer use the school's HP3000, as all the disk space is now full of FORTRAN files belonging to other students. Therefore, this is the final version, unless someone types it into another HP3000 and hacks around with it some more.

Adventure/3000—General Ideas, Layout and Purpose

Adventure is a fascinating fantasy game in which the player first starts out near a small house. He is allowed to use various English commands to move himself and to manipulate objects. When he enters the house he finds objects such as food, water, a lamp and a set of keys. Armed only with these items, he sets out to explore the surrounding countryside in search for the entrance to a mysterious cavern. Inside the cavern are all sorts of goodies (and "bad-dies," for that matter!)—more objects, treasures and various entities that attack, steal, or otherwise impede the player's explorations. Using his intellect, the player must figure out how to manipulate certain things in his favor. For instance, he brilliantly deduces that to unlock something he should use his keys. When the player finds a treasure he is supposed to put it back in the house so he will receive the maximum

number of points for it. The exploration of the cave can take hours of real time, and often an inexperienced player is stymied by seemingly insurmountable obstacles (how does one cross a wide fissure?)

Adventure/3000—Explanation of the Variables and Their Uses

Arrays:

S(x) "Stuff" array. Keeps track of the location of various objects used in the game. X ranges from 1 to T2 (the total # of objects). If X = 0 then it is not currently used in the game; if X = -1 then the object is in the player's possession; otherwise X = the code # of the room in which the object is located.

K(x) The keyword array. Used to store keyword code numbers of any keywords found in a command string. If the user entered "GET BIRD," then K(124) and K(31) would both be set = 1.

V(x) Indicates whether a person has visited room X before. (Tells whether to print a long or a short room description if user wants "brief" descriptions.) Also used in scoring.

O(15) Stores relative skill values for finding each treasure. Used only in scoring.

Simple numeric and string variables:

- T1 = total # of locations (rooms)
- T2 = total # of items (or objects)
- T3 = The number of the highest keyword code #
- L1 = Current location of player
- L2 = Previous location of player. (Not used in my game... would be used if "GO BACK" were in my game)
- G = Status of Grate. (0 = locked; 1 = unlocked)
- BO = Contents of the Bottle. (0 = empty; 1 = water; 2 = oil)
- S = Snake. (1 = blocking the way; 0 = gone for good)
- D1 = Status of Dragon. (1 = blocking the way; 0 = dead and harmless)
- T = Troll. (0 = gone; 1 = demanding treasure; 2 = lurking under bridge; 3 = paid for the moment)
- B1 = Bear. (0 = ferocious; 1 = friendly but captive; 2 = freed)

Adventure, con't...

- B2 = Status of Crystal Bridge. (0 = absent; 1 = present)
 P1 = Size of Plant. (0 = dinky; 1 = half grown; 2 = full grown and climbable)
 D2 = Status of rusty iron door. (0 = closed, locked; 1 = opened)
 DO = Flag for degree of detail when giving descriptions. (0 = short; 1 = long; 2 = brief)
 L = Lamp. (0 = off; 1 = lit)
 C = Status of Chain. (0 = locked to wall, bear; 1 = unlocked)
 D3 = Dwarf flag. (1 = dwarf has thrown (given away) the axe, otherwise D3 = 0)
 B3 = Bird flag. (0 = bird is loose; 1 = he's in the cage.)
 RO = # of times the player has been reincarnated after dying.
 CO = Flag to indicate if player has a loaded game. He is only allowed to load once. (= 1 if game was loaded from a save file; otherwise = 0)
 Z's = Are trash variables used mainly for returning values from subroutines, temporary storage, etc.

Adventure 3000—Description of Major Segments of The Program

- 10 to 260 Initialize the variables, print instructions.
 270 to 550 For each turn, describe room, list objects there, GOSUB for dwarves and pirate, input command string (C\$), do each "sentence" (substring A\$), keep getting A\$'s until LEN(C\$) = 0.
 560 to 1100 Pull keywords out of A\$. Each keyword encountered is recorded in K(x).
 1110 to 1930 These do the moving of the player. Checks are also made for special move conditions / restrictions. If a dwarf was in your room, he would follow you.
 1940 to 2110 See if player wanted a command (not a compass direction). If so, it branches to the given command (in line 2100).
 3590 to 3910 (GET) First it checks for "ALL" (K(47) would = 1) The program checks for all items specified in K(x) and acts accordingly (i.e., it "gets" the requested goods if special "get" conditions are met). If K(item code #) = 0 then that item is skipped over.

- 3920 to 4150 (DROP) Similar in structure to (GET), this routine "drops" the requested items if they are being carried.
 4160 to 4420 (THROW) This command has several uses. One is to kill dwarves by throwing the axe at them. Another is to toss a treasure to the greedy troll. If none of the above are applicable, then the specified item is simply dropped.
 4430 to 6400 These are shorter routines to handle some of the other commands. Most routines here may be easily deciphered by consulting charts detailing room, object and location codes and names.
 6410 to 6640 The "score" command plus a subroutine that is called by Score (line 9760). Score returns two variables: SO (= current score) and Z9 (= total # of rooms visited so far). Player gets some credit for simply finding a treasure, and gets an equal additional amount for placing it back in the house (L1 = 7). See loop from 6540 to 6590. Line 6600 simply gives the player additional points for his ingenuity (i.e., give him 10 points for opening the grate, in which case G = 1).



- 6660 to 6770 List items at current location (L1). Items are stored in file #1. There are T2 items to worry about.
 6880 to 7360 This segment of code makes sure that all conditions are met to get a particular item. For example, it checks to see if it is legal to get the bird, bear, chain, etc.
 7370 to 7610 Checks for special "drop" conditions. Similar to special "get" conditions, except not all the restrictions are identical. Example: one may "GET MING VASE," but if you "DROP MING VASE" and there is no pillow on the floor, the vase will shatter into worthless crockery. (7550-7610)
 7620 to 7780 A quasi - ingenious method of outputting text in the game. Through the use of a multiline function, I need only specify a code number and the corresponding message is printed from file #3. Example: Z9 = FNA(402) will print Adventure's instructions. This is used in lines 60-90.
 7800 to 7980 Checks to see if additional descriptions are needed, depending mainly on location. Example: tell player whether or not grate is locked if he's at location #7.
 7990 to 8230 These two routines print out a description of the player's surroundings.
 8250 to 8380 Look for first item mentioned in command string.
 8390 to 8450 Finds first item in room (if any).
 8460 to 8540 Makes sure player has item #23. Returns Z5 = 1 if he has it; Z5 = 0 if he does not.
 8550 to 8790 Controls placement and attacking for dwarves. Randomly puts dwarves in a room, or makes them attack.
 8800 to 8960 The pirate decides whether or not to rob the player. If he does steal his treasures, the pirate places them in his hide-out (L1 = 100).
 8970 to 9070 Save a game.

Adventure, con't...

- 9080 to 9210 Load an old game. You can only do this once, to avoid cheating.
- 9220 to 9320 A silly routine to read a magazine (currently useless).
- 9330 to 9530 Allows users to report bugs. Bug file may then be read by programmer at a later time.
- 9540 to 9770 Reincarnation routine. Player only goes through this if he fell or jumped into a pit (fatal) or got knifed by a dwarf.
- 9780 to 9850 Check to see if player has fallen into a pit.
- 9860 to 9940 Get a YES (Z0 = 1) or NO (Z0 = 0) reply from user.

Addenda

Adventure/3000 makes use of several weird functions which are probably unique to Hewlett-Packard BASIC. More information may be obtained by reading one of HP's esoteric BASIC manuals.

- (line 30) FILES. Open the disk files. Files are subsequently referred to by number, i.e., #3 is for "AMESSAGE." A * reserves buffer space so that a file may be opened later using the ASSIGN statement.
- (50) INTEGER. Declares variables to be 2 byte integers. This is optional; it simply saves a little memory space.
- (420) LINPUT. Like INPUT, but accepts an entire line which can contain blanks, commas and quotes.
- (9350) ASSIGN (file/name), (file number), (return variable) Example: ASSIGN "BUG," 5, R tries to open file #5 named "BUG." The r is a return variable. If it's not 0 then the file is not open for read/write access. In line 9500 ASSIGN *, 5 closes file #5. (This must be done before assigning a new file to #5).

Crazy Functions:

- (500 & 860) POS(A\$, B\$) returns a number indicating where B\$ occurs first in A\$. Example: POS("CPU," "P") returns 2 since "P" is the second character in "CPU."

- (440) UPS\$ (string). Changes any lowercase letters to uppercase.
- (20) DAT\$ (1, 27). Returns a string with current date and time.
- (460) NUM (string). Performs the same function that ASC does in Microsoft BASICs: returns a decimal value of an ASCII character.
- (250, 9180) MAT READ. Read a matrix from data. In 250, 0(15) means to read 15 numbers into 0(x). A similar statement in line 9180 (MAT READ #) reads arrays from a disk file.
- (6680) READ # (filenumber), 1. This statement rewinds a file to its first record (start of file). Read # (filenumber); (data list) reads data values from a disk file.
- (9030, 9040) PRINT #. MAT PRINT #. These are used to store data in a disk file.
- (9380) ADVANCE. In my program I use this to go to the logical end of the file so that new data may be written to it.
- (530, 7700) CONVERT (string) to numeric variable, [(optional line # to branch to in case of error)]. This is used in line 530 to see if player entered a room code#. If he did, then the computer makes it his new location. Otherwise A\$ is treated as a normal command. In line 7700, this function simply converts a string to a number.

- (170, 180) MAT (name) = ZER. Sets the elements of (name) array to 0. FNA (X). In this program, you specify a x for a specific message, and the function prints the corresponding message out of a file. This is explained elsewhere. ON END # (filenumber) THEN. Transfers control to a given line # when an end of file is reached.

Additional Notes:

In string literals one may encounter strange expressions, as in line 410, which reads PRINT "7'27". This means to print a bell and then an escape character. (number) represents an ASCII character, i.e., '10 = CHR\$(10).

Line 410 prints a ">" prompt in inverse video on an HP2640 terminal (optional).

Lines 520 to 540 can be deleted. These were used for debugging the game. (A player could type a room code# and he would be popped to the appropriate location. Obviously, if this is left in, it will allow cheating).

For Those Trying To Understand How The Program Works

Adventure/3000 can be divided into several parts, as I have outlined in my description of the major segments of the program. The main parts are (not necessarily in order): Initialization, command input loop, command interpretation, command execution and data statements.

Moving is done mainly by entering compass directions which have values as follows: 1 = North, 2 = Northeast, 3 = East, 4 = Southeast, 5 = South, 6 = Southwest, 7 = West, 8 = Northwest, 9 = up, and 10 = down. In my game I have 100 locations, each with a total of 10 possible directions in which to move. I chose to store 100 strings, each of ten characters in a file called "AMOVING." When the player wants to move, the computer finds the L1th string in this file (i.e., indicating the ways he can move from his present location), takes the decimal of the D'th character (corresponding to the direction the player intends to move), looks at this value and decides: (1) that the player can't move that way (= 0); (2) that he can move that way without restriction (in which case the number = the new room code; or (3) the number = 255 which means that the program should check that the player can move legally and in which direction. □



"If I wanted something almost human, I'd gone to an employment agency."

© Creative Computing



A New Type of Game

Welcome to an astonishing new experience! **ADVENTURE** is one of the most challenging and innovative games available for your personal computer. This is not the average computer game in which you shoot at, chase, or get chased by something, master the game within an hour, and then lose interest. In fact, it may take you more than an hour to score at all, and will probably take days or weeks of playing to get a good score. (There is a provision for saving a game in progress).

This game was inspired by the huge Adventure game which has appeared on large mainframe computers the last several years. But there are important differences. Not only will **ADVENTURE** fit into a relatively small computer, but the 'interpreter' is designed so that different Adventures can be created by changing the data base. So look for more Adventures in the future...

In playing the game you wander thru various 'rooms' (locations), manipulating the objects there to try to find 'treasures'. You may have to defeat an exotic wild animal to get one treasure, or figure out how to get another treasure out of a quicksand bog. You communicate thru two-word commands such as 'go west', 'climb tree', 'throw axe', 'look around'.

Six Different Adventures

ADVENTURELAND (by Scott Adams) - You wander through an enchanted world trying to recover the 13 lost treasures. You'll encounter **WILD ANIMALS**, **MAGICAL BEINGS**, and many other perils and puzzles. Can you rescue the **BLUE OX** from the quicksand? Or find your way out of the maze of pits? Happy Adventuring.....

CS-3007 TRS-80 16K Level II (Machine language)	\$14.95
CS-3506 TRS-80 32K Disk (Includes Pirate Adventure)	\$24.95
CS-1009 PET 24K (Includes Pirate Adventure. In Basic)	\$24.95
CS-5003 SORCERER 16K (Machine language, available Nov.)	\$14.95
CS-9003 8" CP/M 48K Disk (Includes Pirate Adventure In Microsoft Basic)	\$24.95

PIRATE ADVENTURE (by Scott Adams) - "Yo Ho Ho and a bottle of rum..." You'll meet up with the pirate and his daffy bird along with many strange sights as you attempt to go from your London flat to Treasure Island. Can you recover **LONG JOHN SILVER**'s lost treasures? Happy sailing matey.....

CS-3008 TRS-80 16K Level II (Machine language)	\$14.95
CS-3506 TRS-80 32K Disk (Includes Adventureland)	\$24.95
CS-1009 PET 24K (Includes Adventureland. In Basic)	\$24.95
CS-5004 SORCERER 16K (Machine language, available Nov.)	\$14.95
CS-9003 8" CP/M 48K Disk (Includes Adventureland. In Microsoft Basic)	\$24.95

ORIGINAL ADVENTURE (by Crowther, Woods, Manning and Roichel) - Somewhere nearby is a colossal cave where others have found fortunes in treasures and gold, but some who have entered have never been seen again. You start at a small brick building which is the wellhouse for a large spring. You must try to find your way into the underground caverns where you'll meet a giant clam, nasty little dwarves, and much more. **This Adventure is Bi-Lingual** - you may play in either **English or French** - a language learning tool beyond comparison. Runs in 32K CP/M system (48K required for **SAVE GAME** feature). Even includes **SAM76** language in which to run the game. The troll says "Good Luck."

CS-9004 8" CP/M 32K Disk \$24.95

MISSION IMPOSSIBLE ADVENTURE (by Scott Adams) - Good Morning, Your mission is to... and so it starts. Will you be able to complete your mission in time? Or is the world's first automated nuclear reactor doomed? This one's well named, its hard, there is no magic but plenty of **suspense**. Good luck.....

CS-3009 TRS-80 16K Level II (Machine language)	\$14.95
CS-3507 TRS-80 32K Disk (Includes Voodoo Castle)	\$24.95
CS-5005 SORCERER 16K (Machine language, available Nov.)	\$14.95

VOODOO CASTLE (by Scott Adams) - Count Cristo has had a fiendish curse put on him by his enemies. There he lies, with you his only hope. Will you be able to rescue him or is he forever doomed? Beware the Voodoo Man.....

CS-3010 TRS-80 16K Level II (Machine language)	\$14.95
CS-3507 TRS-80 32K Disk (Includes Mission Impossible)	\$24.95
CS-5006 SORCERER 16K (Machine language, available Nov.)	\$14.95

THE COUNT (by Scott Adams) - You wake up in a large brass bed in a castle somewhere in Transylvania. Who are you, what are you doing here, and **WHY** did the postman deliver a bottle of blood? You'll love this Adventure, in fact, you might say it's **LOVE AT FIRST BITE**.....

CS-3011 TRS-80 16K Level II (Machine language, available Nov.) \$14.95

To order, send payment plus \$1.00 shipping or bankcard number to **Creative Computing Software**, P.O. Box 789-M, Morristown, NJ 07960. Or call toll-free 800/631-8112 (In NJ 201/540-0445).

**sensational
software**

**creative
computing
software**



DUMP ITEMS/FOODS

There is a large sparkling hoard of gold here!
There are bars of silver here!
There is precious jewelry here!
There are many coins here!
There are several diamonds here!
There is a delicate, precious ring here!
To one side lies a glittering pearl!
There is a nest here, full of golden eggs!
There is a jewel-encrusted trident here!
There is an emerald the size of a plumed egg here!
There is a platinum pyramid here, eight inches on a side!
There is a golden chain here.
There are rope splices here!
There is a valuable Persian rug here!
There is a chest here, full of various treasures!
There is a bottle of water here.
There is a small pool of oil here.
There is a brass lantern here.
There is a set of keys here.
There is food here.
There is a glass bottle here.
There is a small wicker cage here.
There is a 3-foot black rod here.
There is an enormous claw here with its shell tightly shut.
There is a recent issue of "Spelunker Today" here.
There is a bear nearby.
There is a little axe here.
There is a purple velvet pillow here!
There are shards of pottery scattered about!
There is an enormous oyster here with its shell tightly shut!
There is a little bird here.
A hairy troll stands in front of you.
A huge fierce green dragon bars the way!
A huge fierce green snake bars the way!
There is a threatening little dwarf in the room with you!

DUMP ADVENTURE/FOODS

You're in forest.
You're in forest.
You're in forest.
You're at hall at end of road.
You're at road near house.
You're inside house.
You're beside a stream in a valley.
You're near the slit in the streambed.
You're directly above a grave in a dry streambed.
You're below the grave.
You're in cobble crawl.
You're in the dark room.
You're in an awkward sleeping e/w canyon.
You're in the bird chamber.
You're at top of small pit.
You're in hall of mice.
You're in the passage of gold mine.
You're on east side of fissure.
You're on west side of the fissure.
You're at the west end of the hall of mice.
You're in the hall of the mountain king.
You're in the south chamber.
You're in the west chamber.



You are at a N/S passage at a hole in the floor.
You're at "Y2".
You are near a window overlooking the pit.
The passage here is blocked by a recent cave-in.
You're at east end of long hall.
You're at west end of long hall.
You are at a crossover of a high N/S canyon and a low E/W one.
Dead end.
You are in a dirty broken passage.
You're at brink of small pit.
You are in a little pit which as a stream flowing through it.
You are in a room full of dusty rocks.
You're at a complex junction.
You are in the anteroom.
You're at Mitt's End, with passages off in *** ALL *** directions.
You are in the shell room.
You are in an arched hall.
You are in a steep slanting corridor.
You are in a cul-de-sac about 11 feet across.
You are in bedgull.
This is the Swiss cheese room.
You are in the soft room.
You at east end of soap room.
You are at the west end of the soap room.
You're in east pit.
You're in west pit.
You are in the slab room.
This is the oriental room.
You are in a large low room.
You are in a sloping corridor.
You are at a dead end of the crawl.
You are in an alcove.
You are in a misty cavern.
You are in the player room.
You're in dark room.
You are on the SW side of the troll's bridge.
You are on the NE side of the troll's bridge.
You are in an E/W corridor.
You're at fork in path, too.
You are in a N/S limestone passage.
You're at junction with more walls.
You are in the chamber of boulders.
You're at a breath-taking view.
You are outside a barren room.
You are inside a barren room.
You are in a long narrow E/W corridor.
You're in the giant room.
The passage here is blocked by a recent cave-in.
You are at one end of an immense N/S passage.
You're in a cavern with a waterfall.
You are at the top of a steep incline above a large room.
You are in a secret N/S canyon above a waterfall.
You're at top of staircase.
You are at the junction of three secret canyons.
You are in a secret N/S canyon above a large room.
You are in the canyon with the mirror.
You are at the underground reservoir.
You are in a secret canyon with walls of R and E.
You are in a secret E/W canyon above a rocky canyon.
You are at a wide glade in a very tight N/S canyon.
The canyon becomes so tight to continue.



CONTINUOUS BUSINESS FORMS



- PAYROLL/VOUCHER CHECKS
- STATEMENT/INVOICES
- CONTINUOUS LETTERHEADS

- CUSTOM IMPRINTED FOR YOUR COMPANY
- ORDER AS FEW AS 250
- LESS THAN CUSTOM PRICES
- SPACED TO FIT STANDARD #10 WINDOW ENVELOPES
- ALSO-COMplete SELECTION OF RIBBONS FOR YOUR PRINTER.
- FOR MORE INFORMATION, CALL OR WRITE:

(213) 882-9818

Alpha Supply Company

9625 MASON AVE., CHATSWORTH, CALIF. 91311

CIRCLE 107 ON READER SERVICE CARD

HUNGRY?!



Feel The Need For Some Delicious, Nutritious, Organic Software For Your Apple Computer?

THE HARVEST IS IN!!

The Apple Orchard Has Taken Root, Blossomed, And Is Now Harvesting A Choice Crop Of Softwares.

*** VOLUME I IS NOW AVAILABLE ***
(At least 17 programs in each volume.)

GAMES

SOUND

GRAPHICS

UTILITIES

EDUCATION

OPERATION HINTS

Fully documented with YOU in mind.

APPLE COOKBOOK How to get the most from your computer.

APPLESAUCE Tasty tidbits of software fully documented for your pleasure.

SPICED CIDER Information on future releases of software.

Magazine also comes in cassette. (Please specify if you want cassette.) Price: \$15.00.

APPLE ORCHARD


131 HIGHLAND, VACAVILLE, CALIF. 95688

707-448-9055

CIRCLE 110 ON READER SERVICE CARD

WITH
SOUND

BANDITO

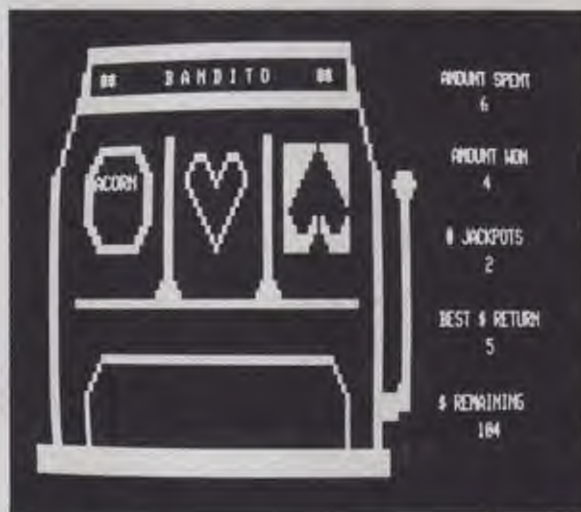

Take the gamble.

Pull the arm on *Bandito*, the graphic TRS-80* slot machine with sound effects.

Hear the *Bandito's* arm creak as it moves. Wait anxiously as the spinning and clicking wheels slow to a stop. And, if your luck holds out, you'll see your winnings pile up!

Bandito will provide hours of fun and entertainment on your TRS-80 microcomputer. The fast graphics are excellent animation and the sound effects give the feeling of actually playing the slots. *Bandito* is good for demonstrating your computer to friends, a great party program, and enjoyable entertainment at any hour.

Sound effects on *Bandito*, as on all Acorn programs, are made through the cassette cables. You just plug a small speaker amplifier into the AUX cable and you'll hear the arm creak, the wheels spin, and the winnings pile up.

Acorn produces several programs with sound effects. These include *Star Warp* and *Lunar Lander*, *Alien*, *Star Trek*, *Ting-Tong*, *Music*, *Codebreaker*, *Word Challenge* and more. All available for \$9.95 for a 16K, Level II TRS-80. Ask for these quality programs at your local computer store.

* TRS-80 is a trademark of Tandy Corp.



Acorn
Software Products, Inc.

634 North Carolina Avenue, S.E., Washington, D.C. 20003

CIRCLE 104 ON READER SERVICE CARD

(I never was any good at identifying bivalves, anyway.)

418 I can't close that!

419 The oil has freed-up the hinges, and with a slight push

the door creaks open.

420 I can't eat.

421 How can I drink that?

422 "Glow, glow, glow, heich!"

423 It doesn't want to eat anything (except maybe you.)

424 You fool! Bivalves only eat coal! How you've made him

*** REALLY MAD ***!

425 Trells are brothers of the rock and have skin like that

of a rhinoceros. He pends off your blows effortlessly.

426 The troll catches the axe, examines it, and tosses it back to

you saying, "Good workmanship, but not very valuable."

427 The troll catches your treasure and scurries away.

428 The bear lumbers toward the troll, who emits a shriek

and flees in terror. The bear soon gives up pursuit.

429 You attack a dwarf, but he jumps out of the way.

430 You killed a little dwarf. The body vanishes in a cloud

of greenish black smoke.

431 There is a threatening little dwarf in the room with you!

432 One sharp nasty knife is thrown at you!

433 A bearded pirate steps from the shadows. "Har har!" he chuckles,

"I'll just take this booty and hide it in me chest deep in the

maze!" He snatches your treasure and vanishes into the maze.

434 There are strange whispering noises from the darkness behind you.

435 The grate is open.

436 The grate is locked.

437 The bird was deafened when you entered, but it becomes frightened

and it flutters up out of your reach.

438 The dome is unclimable.

439 A crystal bridge spans the fissure.

440 A huge fierce green snake basks the way!

441 A hollow voice says "Plugh!"

442 The vase is now resting on the pillow.

443



You are in a tall L/M canyon.

The canyon runs into a maze of boulders--dead end.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.

You are in a maze of twisty little tunnels, all alike.



ATTENTION TRS-80'S

Why sit in the corner in the dark and turned off while your master is sitting by the light, turned on to Creative Computing Magazine? You need a magazine of your own for Education-Enlightenment-Enjoyment and for the personal satisfaction (you're a personal computer, aren't you?) of your very own possession... A Subscription to **CLOAD MAGAZINE!** Turkey your master into sending a check (U.S.A.: \$36.00, Overseas: \$38.00 Surface Delivery — \$48.00 Airmail) to the jive cats at **CLOAD MAGAZINE**. You will get 12 C-30 cassettes, one a month, each one filled with all kinds of juicy software — Games, Tutorials, Practical Programs and Impractical Trivia. All programs rated G for computers under 18 years old.

Do it! Subscribe Now!

CLOAD
MAGAZINE

Box 1267
Goleta, CA 93017
(805) 964-2761
Master Charge/VISA
Welcome

CIRCLE 120 ON READER SERVICE CARD



©1978 CLOAD MAGAZINE

MODEM SALE

We bought a lot of new and used **ORIGINATE** modems acoustically coupled. Operate in full or half duplex mode. Used units have slight cosmetic scratches. RS-232 output

A REAL BARGAIN AT: NEW \$110.00

ALL UNITS MEET OR EXCEED

USED \$95.00

MANUFACTURERS SPECS

AUTO-ANSWER

RS-232 CABLES MODEMS ALSO

**MALE TO FEMALE
MALE TO MALE \$19.95**



**AVAILABLE FOR
IMMEDIATE
DELIVERY**

TRS-80® DISK DRIVES

MPI, PERTEC, & SHUGART

5 1/4" mini-floppy disk drives **\$385.00**

TWO DRIVE CABLE \$ 25.00

FOUR DRIVE CABLE \$ 35.00

CALIFORNIA DATA PERIPHERALS

Post Office Box 571 Millbrae, Calif. 94030

FOR MORE INFORMATION CALL: **(415) 573-0402**

CIRCLE 119 ON READER SERVICE CARD

MICROCOSM I

30 ORIGINAL TRS-80 PROGRAMS

On High Quality Cassettes

With Users Manual and Storage Case

FOR LESS THAN 67¢ EACH

YOU CAN HAVE ALL 30 16K LEVEL II PROGRAMS

- **GAMES** News Photographer, South Pole, Driver, Atlantis, and 5 More
- **EDUCATION** . . . Music Transposition, Spelling Drill, Country Identification and 3 More
- **TRS-80 DIAGNOSTICS** Instruction Tests, Memory Tests
- **HOME** Flowering Houseplants, Mortgage, Calorie Counter and 4 More
- **JUST FOR FUN** Magic Squares, Factorial, Biorhythms and 3 More

THE COMPLETE MICROCOSM I PACKAGE

IS AVAILABLE FOR ONLY \$19.95

FROM YOUR LOCAL COMPUTER STORE OR DIRECTLY FROM

BASICS & BEYOND, inc.

BOX 10 • AMAWALK, N.Y. 10501 • (914) 962-2355

THERE IS NO CHARGE FOR POSTAGE OR HANDLING. N.Y. RESIDENTS ADD 8% SALES TAX.

CIRCLE 114 ON READER SERVICE CARD



Crash! Tinkle! The ming vase shatters into worthless cruchery.
 #44 You fell into a pit and broke every bone in your body!
 #45 It is now pitch dark. If you proceed you may fall into a pit.
 #46 The nest of eggs has vanished!
 #47 There is a tiny plant here, murmuring "water, water".
 #48 There is a twelve-foot beanstalk poking out of the pit,
 #49 following "Water! Water!"
 #50 A giant beanstalk stretches clear to the ceiling and through
 #51 the hole at the top.
 #52 You can't get by the snake.
 #53 The dragon has a rather "volatile" personality, and he will
 #54 probably incinerate you if you get any closer.
 #55 You have crawled through some little holes and have wound up
 #56 back in the main passage.
 #57 Something you're carrying won't fit through the tunnel.
 #58 Your load is too heavy. You'd best take inventory and drop
 #59 something first.
 #60 The troll insists you throw him a treasure before you may cross.
 #61 The troll pops from under the bridge and blocks your way.
 #62 A rusty iron door obstructs the passage to the north.
 #63 The bear will bite off your hand. Besides, the chain is locked to the wall.
 #64 It's rather difficult to move a twenty-ton dragon, considering
 #65 he is lying on the rug.
 #66 The vase is now resting on the pillow.
 #67 A valiant attempt!
 #68 Nice try!
 #69 A valiant attempt. But you're not that strong!
 #70 Don't be silly!
 #71 Do you have any idea on how to do that?
 #72 A huge dragon blocks the way. The dragon is lying
 #73 on a porcelain rug!
 #74 A burly troll stands beside the bridge, blocking your way.
 #75 There is a ferocious cave bear crouching you from the end
 #76 of the room!
 #77 The bear is locked to wall by a golden chain!



#66 There is a calm, friendly bear locked to the wall.
 #67 You are being followed by a large friendly bear.
 #68 With what? Your bare hands?
 #69 Congratulations! You have just killed a huge dragon
 #70 with your bare hands (hard to believe, ain't it?)
 #71 Attacking it is both dangerous and doesn't work.
 #72 There is nothing here to attack.
 #73 How can you do that to more than one thing at a time?
 #74 Thanks. It was delicious!
 #75 I see nothing special about that.
 #76 Oh dear, you seem to have gotten yourself killed. Do you
 #77 want me to try and patch you?
 #78 Ok, but don't blame me if something goes wr
 #79 —POOF—
 #80 You are engulfed in a cloud of thick orange smoke, and
 #81 you emerge coughing and gasping, and find that...
 #82 I don't know how long I can keep this up...
 #83 You clumsy waf, you've done it again!
 #84 I'm all out of orange smoke, and you've used up
 #85 all your available lives. Better luck next time!
 #86 The nest of golden eggs has vanished!
 #87 A little dwarf just walked around a corner, threw a little axe at
 #88 you which missed, cursed, and ran away.
 #89 The nest of golden eggs has re-appeared!
 #90 You are in a forest, with trees all around you.
 #91 You have walked up a hill, still in the forest.
 #92 The road closes back down the other side of
 #93 the hill. There is a building in the distance.
 #94 You are standing at the end of a road before a small
 #95 brick building. Around you is a forest. A small stream
 #96 flows out of the building and down a valley.
 #97 You are inside a building, a wall house for a large
 #98 village.
 #99 You are in a valley in the forest beside a stream
 #100 bubbling along a rocky bed.
 #101 At your feet all the water of the stream splashes into
 #102 a 2-inch slit in the rock. Downstream the streambed is bare rock.
 #103 You are in a 20 foot depression flanked with lone dirt.

The Best MICRO-SOFTWARE

**GENERAL LEDGER • ACCTS. PAYABLE
ACCTS. RECEIVABLE • INVENTORY
PAYROLL**

for PET TRS • 80 Apple II Micropolis
Vector MZ Exidy Sorcerer Cromemco
CBasic-CP/M Microsoft-CP/M

Buy simple, effective programs designed specifically for your machine. Call us once for same week delivery on a product you can use the day you receive it, and two years from now when your company is twice as big. And ask about MICROMAX - our computer output videotape system.

TRS-80: \$100/ea. CBASIC-CP/M: \$200/ea. PET, Apple II, Micropolis, Vector, Exidy, Cromemco, Microsoft: \$140/ea. MAXILEDGER Micropolis: \$350.

Order today by U.P.S. COD. We'll pay postage and handling on American Express, Visa, MasterCard, or prepaid orders.

COMPU MAX
ASSOCIATES, INC.

505 Hamilton Ave., Palo Alto, CA 94301 (415) 321-2881

CIRCLE 123 ON READER SERVICE CARD

SUPER SPECIAL Apple II 16K \$999.99

(8) 16K Rams	\$65.00
(10) Verbatim Disks	\$27.00
Axiom 820 Microplotter	\$699.99

INTRODUCTORY OFFER

TEXAS INSTRUMENTS

TI 99/4

16K \$1099

The Computer Stop
16919 Hawthorne Blvd.
Lawndale, CA 90260
(213) 371-4010

Tues. - Sat.
11:30 to 6 PM

CIRCLE 131 ON READER SERVICE CARD

The COMPUTER FACTORY TO ORDER CALL (212) 687-5001

SUPERBRAIN™
INTERTEC DATA SYSTEMS
ONLY \$2995
\$4K \$2245

NEW! MINIMAX
The Minimax Series Computer is at the heart of the computer revolution. It's the only computer that can handle 100,000 instructions per second. It's the only computer that can handle 100,000 instructions per second. It's the only computer that can handle 100,000 instructions per second.

NEW! CENTRONICS 704
2.5 MB RAM
100,000 instructions per second
100,000 instructions per second
100,000 instructions per second

APPLE II PLUS ONLY \$1195
Features Include:
• 64K RAM
• 100,000 instructions per second
• 100,000 instructions per second
• 100,000 instructions per second

NEW D. C. Hayes MICROMODEM II
• 100,000 instructions per second
• 100,000 instructions per second
• 100,000 instructions per second

NEW Mountain Hardware SUPERTALKER
• 100,000 instructions per second
• 100,000 instructions per second
• 100,000 instructions per second

FINALLY TEXAS INSTRUMENTS TI-99/4 Home Computer
Only \$1195
Includes 12" Color Monitor
Many Peripherals. Coming soon!

DATA GENERAL
Micro Nova
100,000 instructions per second
100,000 instructions per second
100,000 instructions per second

RADIO SHACK • PET • SORCERER • APPLE • COMPUCOLOR • ETC.
PRINTERS • PRINTERS • PRINTERS

ANDERSON JACKSON
Order 375
\$1095
\$1195

FREE
212 of Software with purchase of any computer on this page.

Open Mon-Fri 10-6 Sat 10-4

TO ORDER CALL (212) 687-5001

The COMPUTER FACTORY
405 Lexington Avenue, 750 Third Avenue New York, N.Y. 10017
Foreign order desk - Texas 800/545

ANNOUNCING

TRS-80* PEOPLE'S PASCAL PROGRAM DEVELOPMENT SYSTEM

"Tiny" Pascal, runs on any 16K Level II system, includes the programming structuring capabilities of full Pascal, but not data structuring.

Compiled People's Pascal programs run about five-times faster than Level II Basic — graphics run eight-times faster. Tape 3 compiler written in Basic; tape 6 in machine language (FASTER).

People's Pascal Tape 3	\$15.00
People's Pascal Tape 6	\$23.00
Tape 1 Level II, 34 business, educational programs	\$7.50
(Level I version, 24 programs—separate tape)	
Tape 2 Level II, 77 programs from Osborne book, "Some Common Basic Programs."	\$7.50
Tape 4 Level I, business and educational	\$7.50
Tape 5 Level II, business and educational	\$7.50

Add 50¢ each tape for postage and handling.
California residents add 6% tax. Dealer inquiries invited.

COMPUTER INFORMATION EXCHANGE
Box 158
San Luis Rey, CA 92063

CIRCLE 128 ON READER SERVICE CARD

Set into the dirt is a strong steel grate mounted in concrete. A dry streambed leads into the depression.

#211

You are in a small chamber beneath a 3x5 oval grate to the surface. A low crawl over cables leads inward to the west.

#212

You are crawling over cobbles in a low passage. There is a dim light at the east end of the passage.

#213

You are in a debris room filled with stuff washed in from the surface. A low wide passage with cobbles becomes plugged with mud and debris.

here, but an upward canyon leads upward and west. A note on the wall says "Hagic Mara Xyzzy".

#214

You are in an awkward sloping east/west canyon.

#215

You are in a splendid chamber thirty feet high. The walls are frozen rivers of orange stone. An upward canyon and a good passage exit from east and west ends of the chamber.

#216

At your feet is a small pit breaching traces of white mist. An vast passage ends here except for a small crawl leading in.

#217

Rough stone steps lead down the pit.

#218

You are at one end of a vast hall stretching forward out of sight to the west. There are openings to either side. Nearby, a wide stone staircase leads downward. The hall is filled with wisps of white mist swirling to and fro almost as if alive. A cold wind blows up the stairs. There is a passage to the top of a dome behind you.

#219

Rough stone steps lead to the top of the dome.

#220

This is a low room with a crude note on the wall. The note says, "You won't get it up the steps."

#221

You are on the east bank of a fissure slicing clear across the hall.

#222

The mist is quite thick here, and the fissure is too wide to jump.

#223

You are on the west side of the fissure in the hall of mists.

#224

You are at the west end of the hall of mists. A low wide spiral staircase west and another goes north. To the south is a little passage off the floor.

#225

You are in the hall of the mountain king, with passages off in all directions.

#226

You are in the south side chamber.

#227

You are in the west side chamber of the hall of the mountain king.

#228

A passage continues west and up here.

#229

You are in a low wide passage of a hole in the floor. The hall goes down to an E/W passage.

#230

You are in a large room with a passage to the south, a passage to the west, and a hole or broken rock to the east. There is a large "X" on a piece in the room's center.

#231

You're at a low window overlooking a huge city. Mist extends to east of you.

sight. A floor is indistinctly visible over 50 feet below. Traces of white mist cover the floor of the pit, becoming thicker to the right. Marks in the dust around the window would seem to indicate that someone has been here recently. Directly across the pit from you and 25 feet away there is a similar window looking into a lighted room. A shadowy figure can be seen there peering back at you.

The shadowy figure seems to be trying to attract your attention.

#232

The passage here is blocked by a recent cave-in.

#233

You are at the east end of a very long hall apparently without side chambers. To the east a low wide crawl slants up. To the north a round two foot hole slants down.

#234

You are at the west end of a very long featureless hall. The hall joins up with a narrow north/south passage.

#235

You are at a crosscover of a high W/S passage and a low E/W one.

#236

Dead end.

#237

You are in a dirty broken passage. To the east is a crawl. To the west is a large passage. Above you is a hole to another passage.

#238

You are on the brink of a small clean climbable pit. Passage leads west.

#239

You are at the bottom of a small clean pit. A stream flows out a hole and through some small slits in the bottom of the pit.

#240

You are in a large room full of dusty rocks. There is a big hole in the floor. There are cracks everywhere, and a passage leading east.

#241

You are in a complex junction of the north and south passages from the north into a higher crawl from the east to make a joining passage above west. There is also a large room above. The air is damp here.

#242

You are in an anteroom leading to a large passage to the east. Small passages go west and up. The remnants of recent diggings are evident.

#243

A sign hanging in a hole says "Have under construction beyond this point. Proceed at our risk. IDIT Construction Co."

#244

You are at a large room. A small passage off to the east.

#245

You're in a large room. A small passage off to the east.

#246

There are a large room. A small passage off to the east.

#247

There are a large room. A small passage off to the east.

#248

There are a large room. A small passage off to the east.

#249

There are a large room. A small passage off to the east.

#250

There are a large room. A small passage off to the east.

#251

There are a large room. A small passage off to the east.

#252

There are a large room. A small passage off to the east.

#253

There are a large room. A small passage off to the east.

#254

There are a large room. A small passage off to the east.

#255

There are a large room. A small passage off to the east.

#256

There are a large room. A small passage off to the east.

#257

There are a large room. A small passage off to the east.

#258

There are a large room. A small passage off to the east.

#259

There are a large room. A small passage off to the east.

#260

There are a large room. A small passage off to the east.

#261

There are a large room. A small passage off to the east.

#262

There are a large room. A small passage off to the east.

#263

There are a large room. A small passage off to the east.

Quality Apple Software

BASIC TEACHER - Learn Integer Basic in 12 easy lessons. TAPE \$17, DISK \$25

TEACHER PLUS - Let your Apple Plus Teach you. Applesoft II TAPE \$22, DISK \$29

FLOATING POINT DICTIONARY - A teaching and reference program for Applesoft. DISK \$30

PERSONAL ACCOUNTING SYSTEM - Handy Summary System TAPE \$22, DISK \$25
With detailed Reports & Audit Trail. DISK \$85

BUSINESS ACCOUNTING SYSTEM
Full Reports DISK \$100
With Payroll DISK \$200

APPLE TEACHER - Universal Teaching Program. TAPE \$13, DISK \$22

Also Complete Lines from Charles Mann & Associates, Personal ComputerSoft, Edusoft, and Games Enterprises. VISA & MASTER-CHARGE. Postage \$2.00

CREDIT CARD ORDERS



CREATIVE DISCOUNT SOFTWARE
256 S. Robertson, Suite 2156
Beverly Hills, Calif. 90211

CIRCLE 137 ON READER SERVICE CARD

TARBELL VDS-II Vertical Disk Subsystem

SYSTEM INCLUDES:

- 2 Siemens 8" Disk Drives
- 1 Cabinet with Fan and Power Supply.
- 1 Tarbell Floppy Disk Interface, assembled & tested.
- 1 CP/M* Disk Operating System.
- 1 Tarbell BASIC.
- All Cables and Connectors.
- Complete User Documentation.
- Fully Factory Assembled and Tested.

VDS-II Single Density \$1888
VDS-IID Double Density \$1999

CP/M is a
product of
Intelligent
Reliance
Corp.



Tarbell
electronics

950 DOVLEN PLACE, SUITE B
CARSON, CA 90746
(213) 538-4251 • (213) 538-2254

CIRCLE 216 ON READER SERVICE CARD

NOVEMBER 1979

Verbatim™ FLOPPY DISKETTES

5 1/4" ONLY \$2.65 ea. in 100's

10 FOR \$3.25 ea. 50 FOR \$3.00 ea.

8" ONLY \$3.30 ea. in 100's

10 FOR \$3.80 ea. 50 FOR \$3.55 ea.

SEND FOR OUR FREE ELECTRONIC & COMPUTER PRODUCTS CATALOG

SPECIFY DISKETTE TYPE & COMPUTER

5 1/4" Soft Sector, 10 sector, 16 sector

8" IBM Compatible, Hard Sector

CALL 24 HRS. TOLL FREE TO ORDER

NATIONAL 800-824-7888

CALIF. ONLY 800-852-7777

ALASKA & HAWAII 800-824-7919

ASK FOR OPERATOR 813

VISA, MASTERCARD OR C.O.D.

SEND CHECK, SAVE C.O.D. FEES



SOFTWARE & COMPUTER PRODUCTS

A subsidiary of DataComm Interface Systems

POST OFFICE BOX 503

SAN BRUNO, CA 94066

(415) 348-2387

CIRCLE 140 ON READER SERVICE CARD

First there was Star Trek.
Then there was Star Wars.

**NOW THERE IS
SPACE.**

**A FANTASTIC CHALLENGE
FOR YOU AND YOUR APPLE!**

This unique epic game series provides a multi-faceted simulation of human life in an interstellar environment. It is designed to represent many of the decisions which would be faced by a member of interstellar society interacting with his complex and demanding environment. Because of the complexity and length of the programs, it is likely that play will extend over several sessions. The six games comprising the series each generate text files which maintain a permanent record of the life of each character in the game.

SPACE requires a 48K Apple and Applesoft ROM.

Only \$29.95

EDU-WARE
UNIQUE SOFTWARE FOR THE UNIQUE MIND.

EDU-WARE SERVICES, INC.
1700 Alameda Ave., Suite 200
Berkeley, CA 94702
(415) 846-4703

EDU-WARE PLACENTIA
123 Yuba City Blvd.
Placentia, CA 92676
(714) 394-4703

RAMBER COMPUTING, INC.
1715 Route 91E
Newman, CA 95135
(415) 398-9020

CIRCLE 145 ON READER SERVICE CARD

- #246
You are in the soft room. The walls are covered with heavy curtains. The floor with a thick pile carpet. Moss covers the ceiling.
- #247
You are at the east end of the twoply room. The floor here is littered with thin rock slabs, which make it easy to descend the pits. There is a path here bypassing the pits to connect passages from east and west. There are holes all over, but the only one is on the wall directly over the west exit where you can't get to it.
- #248
You are at the west end of the twoply room. There is a large hole in the wall above the pit at this end of the room.
- #249
You are at the bottom of the eastern pit in the twoply room. There is a small oval of pit in one corner of the pit.
- #250
You are in the bottom of the western pit in the twoply room. There is a large hole directly above you.
- #251
You are in a large low circular chamber whose floor is an immense slab fallen from the ceiling (slab room). East and west there once were large passages, but they are now filled with boulders. Low small passages go north and south, and the south one quickly bends west around the boulders.
- #252
This is the oriental room. Ancient oriental cave drawings cover the wall. A gently sloping passage leads upward to the north, another passage leads SE, and a hole and knee crawl leads west.
- #253
You are in a large low room. Crawls lead north, SE and SW.
- #254
You are in a long winding corridor sloping out of sight in both directions. A cold wind blows in the corridor.
- #255
Dead end crawl.
- #256
You are following a wide path around the outer edge of a large cavern. On below, through a heavy white mist, strange colliding noises can be heard. The mist rises up then it descends in the swirling. The mist exits to the south and west.
- #257
You are in an alcove. A small alcove seems to open after a short distance. An extremely tight tunnel leads east. It leads into a very tight source. An eerie light can be seen at the other end.
- #258
You are in a room lit by an eerie green light emanating from the walls. An extremely tight tunnel leads west, and a dark corridor leads to the SE.
- #259
You are in the darkroom. A corridor leading south is the only way. A massive stone robot stands in the wall room.
- #260
Congratulations on bringing light into the cave-room.
- #261
You are on one side of a large deep chasm. A heavy mist with rising up from below obscures all view of the far side. A SW path leads away.
- #262
A rickety wooden bridge extends across the chasm, vanishing into the mist. A sign above the bridge reads, "Good! Pay toll!"
- #263
You are on the far side of the chasm. A SL path leads open from the chasm on this side.

- A rickety wooden bridge extends across the chasm, vanishing into the mist. A sign posted on the bridge reads, "Good! Pay toll!"
- #264
You're in along east/west corridor. A faint rumbling noise can be heard in the distance.
- #265
The path forks here. The left fork leads northeast. A dull rumbling seems to get louder in that direction. The main corridor enters from the west.
- #266
You are walking along a gently sloping north/south passage lined with badly shaped limestone formations.
- #267
The walls are quite warm here. From the north can be heard a steady roar. To lead the the entire cave seems to be trembling. Another passage leads south, and a low crawl goes east.
- #268
You are in a small chamber filled with large boulders. The walls are very warm, causing the air in the room to be almost stifling from the heat. The only exit is a crawl heading west, through which is coming a low rumbling.
- #269
You are on the edge of a breath-taking view. Far below you is an active volcano, from which great gouts of molten lava come surging out, descending back into the depths. The glowing rock fills the farthest reaches of the cavern with a blood-red glow, giving everything an eerie, macabre appearance. The air is filled with flickering sparks of ash and a heavy smell of brimstone. The walls are hot to the touch, and the thundering of the volcano drums out all other sounds. Embedded in the jagged rock far overhead are myriad twisted formations composed of pure white diablaston, which scatter the murky light into sinister apparitions upon the walls. To one side is a deep gorge, filled with a bizarre chaos of tortured rock which seems to have been crafted by the devil himself. An immense river of fire crashes out from the depths of the volcano, burns its way through the gorge, and plunges into a hair-raising pit far off to your left. To the right an immense geyser of blistering steam erupts continuously from a barren island in the center of a sulphurous lake which bubbles ominously. The far right wall is aflame with an inconceivable intensity. Its ash, which seems an additional infernal splendor to the already hellish scene. A black, foreboding corridor exits to the south.
- #270
You are standing at the entrance to a large barren room. A sign posted above the entrance reads "Caution! Bear in room!"
- #271
You are inside a barren room. The center of the room is completely empty except for some oval holes in the floor. The only exit leads out through the far end of the room. The only exit is the way you came in.
- #272
You are in a long, narrow corridor stretching out as sight to the west. At the far end is a hole through which you can see a dark, misty landscape.
- #273
You are in the dark room. The ceiling here is too high for you to see. The walls are covered with a thick mist. The floor is covered with a thick mist. The only exit is the way you came in.
- #274
The passage here is filled with a red-hot lava.
- #275
You are at the end of a long, narrow passage. The walls are covered with a thick mist. The floor is covered with a thick mist. The only exit is the way you came in.

**DISK DRIVE WOES? PRINTER INTERACTION?
MEMORY LOSS? ERRATIC OPERATION?
DON'T BLAME THE SOFTWARE!**



ISO-1

ISO-2

Power Line Spikes, Surges & Hash could be the culprit! Floppies, printers, memory & processor often interact! Our unique ISOLATORS eliminate equipment interaction AND curb damaging Power Line Spikes, Surges and Hash.

*ISOLATOR (ISO-1A) 3 filter isolated 3-prong sockets; integral Surge/Spike Suppression; 1875 W Maximum load, 1 KW load any socket \$54.95

*ISOLATOR (ISO-2) 2 filter isolated 3-prong socket banks; (6 sockets total); integral Spike/Surge Suppression; 1875 W Max load, 1 KW either bank \$54.95

*SUPER ISOLATOR (ISO-3), similar to ISO-1A except double filtering & Suppression \$79.95

*ISOLATOR (ISO-4), similar to ISO-1A except unit has 6 individually filtered sockets \$93.95

*ISOLATOR (ISO-5), similar to ISO-2 except unit has 3 socket banks, 9 sockets total \$76.95

*CIRCUIT BREAKER, any model (add-CB) Add \$ 6.00

*CKT BRKR/SWITCH/PILOT any model (-CBS) Add \$11.00

PHONE ORDERS 1-617-655-1532

ESP Electronic Specialists, Inc.

171 South Main Street, Natick, Mass. 01760 Dept. CC11

CIRCLE 146 ON READER SERVICE CARD

**Going dotty over the
quality of your printing?
Be SELECTRIC® in the future.**

Any microcomputer can interface with any model IBM SELECTRIC®.

Prices*	S-100	\$496.00
	Parallel	\$525.00
	RS-232	\$549.00
	IEEE-488	\$560.00

All prices include mechanical assembly, electronics, cables and manuals.

Units tested and assembled.

*Prices valid in USA only.



Escon Products, Inc.
171 Mayhew Way, Suite 204,
Pleasant Hill, CA 94523
(415) 935-4590

CIRCLE 147 ON READER SERVICE CARD

CP/M[®]2

NOW BETTER THAN EVER

- Control Program for Microcomputers.
- Includes Editor, Assembler, Debugger, Utilities.
- Supports Floppy Disks and Hard Disks.
- For 8080, 8085, Z-80, MDS, Cromemco.
- **\$150**-Diskette and Documentation
- **\$25**-Documentation only

MP/M[™]

NEW INDUSTRY STANDARD

- Multi-terminal access.
- Multi-programming.
- CP/M-compatible.
- Real-time features.
- **\$300**-Diskette and Manual
- **\$25**-Manual only

DIGITAL RESEARCH

OPTIONAL SOFTWARE PACKAGES

MAC[™] MACRO ASSEMBLER:

- Compatible with new Intel macro standard.
- Complete guide to macro applications.
- **\$90**-Diskette and Manual.

SID[™] SYMBOLIC DEBUGGER:

- Symbolic memory reference.
- Built-in assembler/disassembler.
- **\$75**-Diskette and Manual.

TEX[™] TEXT FORMATTER:

- Powerful text formatting capabilities
- Text prepared using CP/M Editor.
- **\$75**-Diskette and Manual.

DESPOOL[™]

- Background print utility.
- Use with CP/M
- **\$50**-Diskette and Manual.

DIGITAL RESEARCH[®]

P.O. Box 579 • Pacific Grove, California 93950
(408) 649-3896

CIRCLE 143 ON READER SERVICE CARD

\$274

You are in a magnificent cavern with a rushing stream, which cascades over a sparkling waterfall into a roaring whirlpool which disappears through a hole in the floor. Passages exit to the south and west.

\$275

You are at the top of a steep incline above a large room. You could climb down here, but you would not be able to climb back up. There is a passage leading back to the north.

\$276

You are in a secret N/S canyon above a sizable passage.

\$277

A large stalactite extends from the roof and almost reaches the floor below. You could climb down it, and jump from it to the floor, but having done so you would be unable to reach it to climb back up.

The maze continues at this level.

\$278

You are in a secret canyon at a junction of three canyons, bearing north, south, and SE. The north one is at right angles to the other two combined.

\$279

You are in a secret N/S canyon above a large room.

\$280

You are in a north/south canyon about 25 feet across. The floor is covered by white mist seeping in from the north. The walls extend upward for well over 100 feet. Suspended from some unseen point far above you, an enormous two-sided mirror is hanging parallel to and midway between the canyon walls. (The mirror is obviously provided for use by the dwarves, who, as you know, are extremely vain.) A small window can be seen in either wall, some fifty feet up.

\$281

You are at the edge of a large underground reservoir. An opaque cloud of white mist fills the room and rises rapidly upward. The room is fed by a stream which tumbles out of a hole in the wall about 10 feet overhead and splashes noisily into the water somewhere within the mist. The only passage goes back toward the south.

\$282

You are in a secret canyon with exits to north and east.

\$283

You are in a secret E/W canyon above a tight canyon.

\$284

You are in a wide place in a very high N/S canyon.

\$285

The canyon here becomes too tight to go on.

\$286

You are in a tall E/W canyon. A low cross goes fifteen feet north and seems to stand up.

\$287

The canyon runs into a maze of beautiful—dead end.

\$288

You are in a maze of twenty little tunnels, all alike.

\$289

You are near a large pit below a large orange stalactite in the maze. The stalactite is about 50 feet long, allowing you to descend it. However, due to the overhangs of the stalactite, you will probably be unable to climb back up again.

\$290

Dead end.

\$291

Back to adventure. Would you like instructions?

\$402

Somewhere nearby is Colossal Cave, where many have found gold and treasure, though it is rumored that some who enter are never seen again. I will be your eyes and hands. Direct me with commands such as get, take, or look. Since you need to move around, you must usually enter compass directions (N, NE, E, SE, S, SW, W, NW, or up or down), although you may sometimes use more vague verbs with which to move. I know of several objects in this game, such as a lamp and a bottle. I also know of special objects in the cave. Some of these objects have odd effects; at there is a rod in the cave that scores a little bird.

The object of this game is to gather as many treasures as you can and get them back in the house. You also run the risk of getting scooped or killed by some rather unfriendly inhabitants of the cave.

There are some useful commands that you should know about:

- Brief, Long, and Short—these commands control the amount of detail you get in descriptions.
- Look (or L)—gives a detailed description of your surroundings.
- Inventory (or I)—tells you what you are carrying.
- Quit, Stop, or End—these are self-explanatory.
- Save-by typing this, you may save your game and continue it at a later time.
- Continue—lets you continue an old game.
- Score—tells you how well you're doing.

(Other helpful functions included:

1. Multiple commands in one input line, i.e. "Go south, Get car, Keys, Start car." (example only)

"Adventure" is a version of the game created by Willy Crowther and Don Woods at M.I.T.

\$403

I'm sorry, but the magazine is written in Dwarvish.





BASEX MEANS SPEED!

BASEX is a fast, easy to learn language for 8080, Z80, or 8085 microcomputers. Its commands resemble BASIC, making translation easy. An interactive compiler permits

you to enter, list, edit and run programs up to 10x faster than similar BASIC programs and use half the memory (2K plus program).

Powerful features include:

- * Array variables
- * 16 Bit Arithmetic/Logic
- * Variable name length
- * Named subroutines with multiple arguments
- * Text strings
- * Versatile I/O Functions
- * Block memory searches/transfers
- * Custom commands easily added

CHOOSE YOUR BASEX...

- * 97-Page BASEX manual (pub. by Byte Books) \$ 8
- * North Star Disk/Meca Alpha Tape/Paper Tape \$25
- * TRS-80 Level II, 16K tape with graphics commands \$25
- * CPM 8" Disk, with disk handler commands \$35
- * Basex Tape & Disk Guide-provides complete handlers for North Star Disk and/or Meca Tape (includes manual with source) \$35
- * Add \$.75 shipping (special 4th class) or \$1.50 special handling on all orders.

See BASEX at your local dealer or order direct from



Interactive Microware, Inc.
P.O. Box 771
State College, Pa 16801
(814) 238-8284

DEALER
INQUIRIES
INVITED

CIRCLE 155 ON READER SERVICE CARD

JADE

Computer Products

1979

CATALOG

SECOND EDITION

**required reading
send for your free copy today!*

4901 WEST ROSECRANS, HAWTHORNE, CA, 90250
213-679-3313

TOLL FREE CONTINENTAL U.S. TOLL FREE INSIDE CALIFORNIA
800-421-5809 800-262-1710
CIRCLE 157 ON READER SERVICE CARD

NOVEMBER 1979



Santa says:

"Here's a great deal from dP. So please stuff the stockings of your favorite computer lover with dP books and save me the work."

Thanks

INTRODUCTION TO T-BUG

by Don Inman & Kurt Inman

At last a comprehensive guide to the TRS-80 machine language monitor operations. By the author of our best selling INTRODUCTION TO TRS-80 GRAPHICS. Bound to be the best of its kind.

\$6.95 paper

FROM DITS TO BITS: A PERSONAL HISTORY OF THE ELECTRONIC COMPUTER

by Herman Lukoff

This long-awaited saga of the minds involved in the very earliest stages of computer development makes for great historical reading for computer buff and layman alike.

\$12.95 cloth

MAKING MONEY WITH YOUR MICROCOMPUTER

by Carl Townsend & Merl Miller

Got an entrepreneur with a micro in your household? Here's the perfect gift. It's chock full of ideas for turning that micro into a money-making machine!

\$8.95 paper

QWIKTRAN

by Kevin McCabe

Here's a quick guide to learning FORTRAN for "someone who can't even balance a checkbook". It's simple, quick and requires no prior programming experience whatsoever.

\$11.95 paper

SOFTWARE TAPES FOR TRS-80 LEVEL II AND 8K PET

Five separate program tapes, each containing six or more programs. Topic groups include: Applications, Educational, Math, Games and Graphics and Miscellaneous. Be sure to indicate what type of machine you have when ordering.

\$9.95 each tape
\$49.95 set of five

That's right! We're offering a 10% discount on any order for two or more books from this ad or from our dP BRAIN FOOD catalogue. Just send in your check, money order or VISA or MASTERCARD number and expiration date and write MERRY CHRISTMAS in big letters on the order form. Be sure to send special Christmas orders only to the address and department listed below. It's a great way to say "Merry Christmas" to your favorite computer aficionado and our way of saying "Merry Christmas" to you.

Christmas discount orders to: dillithium Press
P.O. Box 10766
Dept. Xmas
Portland, Or. 97210

CIRCLE 144 ON READER SERVICE CARD

A world of information for the information world.

If you are a part of this burgeoning age of information, INFORMATION WORLD is designed with you in mind. The publication is a forum where traditional information professionals well versed in the organization of books and paper records meet new information professionals dependent on hardware and software as both are driven into the future and toward each other by technology.

From information issues between developed and developing nations to new technologies aiding data storage and retrieval, INFORMATION WORLD will inform you each month of new products, new services, new methods and new people.

**If your world is
information you need
Information World.**

Subscribe now.

INFORMATION WORLD
P.O. BOX 3618
WASHINGTON, D.C. 20007

- ☐ 2 years (24 issues) at \$68, US; \$73, Canada; \$78, Europe
☐ 1 year (12 issues) at \$36, US; \$40, Canada; \$45, Europe
☐ Payment is enclosed ☐ Bill me later
☐ Bill organization indicated below

Send to:

NAME _____

TITLE _____

ORGANIZATION _____

ADDRESS _____

CITY _____

STATE _____

ZIP _____

Note: Your subscription to Information World may be tax deductible as a legitimate business expense.

CIRCLE 153 ON READER SERVICE CARD



UNHAPPY, "I HAVE MANY CHARACTERS

SAVE \$

Pre-Holiday Special

Dual Disk Drives! . Quad Disk Drives! IN ONE CASE!

One switch, one cord. • Over 400K* in one (QUAD) Cabinet.

★Dual Drives \$698.00 Includes Cable & TRS D.O.S.

★Quad Drives \$1359.00 Includes Cable & TRS D.O.S.

You would pay \$1,000.00 or 2,000.00 at Radio Shacks Prices.

90 Day EXCHANGE GUARANTEE

DEALER INQUIRIES INVITED
Send for our NEW FALL/WINTER CATALOG. Ask about our LOW PRICES on 77 Track Drives.

*All drives will access 40 tracks when used with
NEWDOS or NEWDOS+ (EXTRA)

LEVEL IV PRODUCTS, INC.

32238 Schoolcraft, Suite F4 — Livonia, Michigan 48154 — (313) 525-6200

CIRCLE 159 ON READER SERVICE CARD

Introducing . . .

Graphic Golf

TRS-80* Level II 16K



Welcome to "Small Woods Country Club," where you can play on our scenic 18 hole, par 72, 6,840 yard course. Will you make it over the lake, or take the long way? You choose the club and angle, 80% skill, 20% chance. A challenge to all. Plays like a real course. Instruction tape included. Easy to order . . .

15⁹⁵

Send check or money order to: Ken Smallwood
(Calif. residents add 6%) 389 Coral St.
Visa or Mastercharge accepted Santa Cruz, Ca. 95060
Bank Card order for 1 day delivery (408) 688-4187

Dealer inquiries invited

CIRCLE 158 ON READER SERVICE CARD

--- CALL FOR DEALERS ---

If it doesn't have the ANSI notch,
it wasn't made for a computer!!!



TRADITIONALLY THE SOURCE FOR THE HIGHEST QUALITY PROFESSIONAL CASSETTES ANNOUNCES TWO NEW PRODUCTS

'MICRO-COMP'

Low priced Certified Digital Cassette specifically designed for use in the Micro Computer. Featuring 10 minutes of instant-play computer tape.

ALIGNMENT REFERENCE CASSETTE

For calibrating Digital and Word Processing equipment. Cassette is pre-recorded at 1600 flux changes/in. on an optically aligned recorder which employs precision magnetic heads.

For more information write or call collect.

Vince Rucco

Magnetic Information Systems, Inc.
415 Howe Ave., Shelton, CT 06484
(203) 735-6477

(Private labelling available)

CIRCLE 161 ON READER SERVICE CARD

MEMOREX DISKETTES & CARTRIDGES

for your computer or word processor

BUY THE BEST FOR LESS.
Lowest prices. **WE WILL
NOT BE UNDERSOLD!!** Buy
any quantity 1 - 1000. Visa,
Mastercharge accepted. Call
free (800) 235-4137 for prices
and information. All orders
sent postage paid.



**PACIFIC
EXCHANGES**
100 Foothill Blvd.
San Luis Obispo, CA
93401. (In Cal. call
(805) 543-1037.)

CIRCLE 162 ON READER SERVICE CARD

TRS-80

MEMORY EXPANSION KITS \$79

Each Kit consists of: 8 Memory Chips, Jumper Blocks, and
Complete EASY TO FOLLOW Instructions
Expands 4K TRS-80 up to 48K (3 sets)
TRS-80FLOPPY Disk (SA-400) Add On
COMPLETE Ready to use with power supply and case \$389

ADD to your APPLE or \$100 Bus Computer

\$89 - Set of 8 250 NS

\$99 - Set of 8 200 NS

No. 4116 - 200 NS (w/16K Chips), 16K, \$279, 32K, \$375,
48K, \$469, 64K, 568

No. 4115, 8K, \$189, 16K, \$229, 24K, \$269, 32K, \$309

\$100 Bus Expandoram Kits*

*Expand NOW or LATER to 64K (32K for *K Chips)
8K Chips: \$49/Set of 8

ASSEMBLED, TESTED AND BURNED IN - ADD \$50
MONEY BACK GUARANTEE

FULLY WARRANTED FOR 6 MONTHS

Master Charge - VISA - C.O.D. (25% with order) -

Money Order - California Residents add 6% Sales Tax

Shipping Charges: \$2.00



MicroComputerWorld



P.O. Box 242

San Dimas, CA 91773

(213) 286-2661

CIRCLE 168 ON READER SERVICE CARD

SAVE ON ADD-ON PRODUCTS FOR TRS-80

SUPER DISK

\$695

TF-7D Micropolis Largest capacity mini floppy.
up to 195 Kbytes on 77 tracks with 77TKDOS+...

A Complete Family Of DISK DRIVES To Choose From... IN STOCK

ALL DISK DRIVE SYSTEMS COME COMPLETE
WITH POWER SUPPLY AND CHASSIS.

Two drive cable \$25 • Four drive cable \$35

TF-1	Perfec FD200, 5 1/4" 40 track use both sides	\$382
TF-3	Shugart SA400, 5 1/4" 35 tracks same as TF-1	\$389
TF-5	MPI 5 1/4" 40 track door lock and auto diskette ejection ..	\$379
TDH-1	Perfec Dual Head 35 track same capacity as 2 drives ..	\$499

ADD-ON DISK DRIVES

DOES NOT INCLUDE POWER SUPPLY OR CHASSIS

•Perfec FD200	\$282.00
•Shugart SA400 (unused)	\$286.00
•Perfec FD250 (Dual Head)	\$399.00
•MPI B-51	\$279.00
•MP B-52 (Dual Head)	\$349.00

PRINTERS



•LP779 Centronics 779 w/tractors	\$1099
•LP700 Centronics 700	\$1495
•LP701 Centronics 701	\$1759
•NEC Spinwriter	\$2499
•LP702 Centronics 702	\$1899
•DP8000 Anadex Printer	\$999
•LP1 Centronics P1	\$399
•Centronics cables	\$39

SOFTWARE

IMPROVE TRS-80 PERFORMANCE WITH NEW DOS+

OVER 200 MODIFICATIONS, CORRECTIONS
AND ENHANCEMENTS TO TRS-DOS. INCLUDES
UTILITIES. AVAILABLE IN TWO VERSIONS:

•35 Track Version	\$99
•40 Track Version	\$110
•Accounts Receivable	\$39
•Inventory Control	\$39
•Job Entry/Status	\$75
•General Ledger	\$79
•Game Diskette	\$19
•AJA Word Processor	\$75

NEW PRODUCTS

•Small System RS232 Interface	\$49.00
•Expansion Interface w/32K	\$499.00
•AC Line Interference Eliminator	\$18.95
•AC Isolator (6 connectors)	\$45.95
•Telephone Interface	\$179.95
•Verbatim 5 1/4" soft sector Diskettes	\$3.39
•16KM 16K RAM Kit Computer	\$82.00
•16 Key Pad Kit	\$68.00

ALL PRICES CASH DISCOUNTED • FREIGHT FOB/FACTORY



**MICROCOMPUTER
TECHNOLOGY
INCORPORATED**



Apparat, Inc.

2080 South Grand Ave.
Santa Ana, CA 92705
(714) 979-9923

6000 E. Evans Ave., Bldg. 2
Denver, CO 80222
(303) 758-7275


```

2610 REM VLS
2620 Z2=70
2630 GOTO 1180
2640 REM *** JUMP *** STRICTLY SUICIDAL
2650 IF L1116 AND L1119 AND L1120 AND L1127 THEN 2200
2660 Z9=NA(4)
2670 GOTO 9550
2680 REM ILL
2690 IF S1211=-1 THEN 2730
2700 B5="bottle"
2710 PRINT "You don't have the '188"
2720 GOTO 410
2730 IF R0=0 THEN 2760
2740 Z9=NA(5)
2750 GOTO 410
2760 IF L1117 AND L1118 AND L1119 AND L1135 AND L1136 AND L1137 THEN 2790
2770 B0=L1116=-1
2780 GOTO 2840
2790 IF L1149 THEN 2830
2800 B4="oil"
2810 PRINT "I see no '188," here."
2820 GOTO 400
2830 B0=2,5117=-1
2840 PRINT "The bottle is now filled"
2850 GOTO 400
2860 REM *** EMPTY ***
2870 IF S1211=-1 THEN 2990
2880 GOTO 2700
2890 REM EMPTY BOTTLE (ASSUMED FULL)
2900 S1801S1=0,B0=0
2910 PRINT "Enoia"
2920 GOTO 400
2930 REM *** LOOK ***
2940 IF L1113 OR L1118 OR (L111 AND (S1801=L1 OR S1801=L1)) THEN 2970
2950 Z9=NA(45)
2960 GOTO 400
2970 GOSUB 0050
2980 GOSUB 6600
2990 GOTO 400
3000 REM *** LIGHT ***
3010 IF S1811=-1 THEN 3040
3020 B8="lamp"
3030 GOTO 2710
3040 L=1
3050 B8="on"
3060 PRINT "The lamp is now '188"
3070 GOTO 2940
3080 REM *** OFF (EX-TRUISH) ***
3090 IF S1811=-1 THEN 3110
3100 GOTO 3020
3110 L=0,B0="off"
3120 GOTO 3030
3130 REM *** ENTER ***
3140 IF L1116 THEN 3180
3150 REM TO HOUSE
3160 P=3
3170 GOTO 1070
3180 IF L1118 THEN 3220
3190 REM TO BARNEN ROOM
3200 D=2

```



```

3230 IF S1231=L1 THEN 3750
3240 ELSE GOTO 3790
3250 IF K1471 THEN 3900
3260 PRINT "Oh, not here."
3270 GOTO 3900
3280 REM MUST CHECK NOW FOR LEGALITY OF TAKING ITEM
3290 Z8=0
3300 FOR X=1 TO 12
3310 SIX1=-1 THEN Z8=Z8+1
3320 NEXT X
3330 IF Z8<7 THEN 3370
3340 REM CARRYING TOO MUCH
3350 Z9=NA(54)
3360 GOTO 410
3370 GOTO 4680
3380 S1231=-1
3390 PRINT "As, taken."
3400 NEXT Z3
3410 GOTO 400
3420 REM *** DRUP ***
3430 RESTORE 580
3440 IF K1471 THEN 4000
3450 GOSUB 6280
3460 IF Z8=0 THEN 3990
3470 PRINT "Open what?"
3480 GOTO 2040
3490 REM
3500 RESTORE 9960
3510 FOR Z3=1 TO 12
3520 READ B8
3530 IF K1471 THEN 4060
3540 IF K1231(1) THEN 4150
3550 IF S1231(1) THEN 4100
3560 IF S1231=-1 THEN 4100
3570 IF K1471 THEN 4140
3580 PRINT "You don't have the '188"
3590 GOTO 4140
3600 REM STILL NEED TO ELABORATE ON DEEP CHIMP IN CAGE, BOTTLE)
3610 GOTO 7280
3620 PRINT "B8," "opened."
3630 S1231=L1
3640 NEXT Z3
3650 GOTO 400
3660 REM *** FROM ***
3670 GOSUB 6280
3680 IF Z8=0 THEN 4210
3690 PRINT "Throw what?"
3700 GOTO 2040
3710 IF S1231(1) THEN 3710
3720 IF NOT (Z3(1) AND B1321=L1) THEN 4290
3730 REM THROW THEAQUE TO TROLL
3740 Z9=NA(27) S1231=0 T=3
3750 GOTO 430
3760 IF Z8<7 AND S1231=L1 THEN 4100
3770 REM TRYING TO PITCHER TROLL
3780 Z9=NA(26) S1231=L1
3790 GOTO 400
3800 IF NOT (Z9=0 AND B1321=L1) THEN 4290
3810 REM TRYING TO KILL TROLL
3820 IF K1471 THEN 4260
3830 Z9=NA(27)

```



North Star★ and PASCAL Users: *Mike's* announces

Hard disk and 8" drive interfaces to North Star
DOS and BASIC and PASCAL.

TIMESHARING for the Horizon—

Interrupt-driven, bank switching
timesharing software; supports
North Star DOS and BASIC and
PASCAL.

Complete business systems starting at less than
\$5,000. Eight inch and hard disk drives available.

A complete selection of business application soft-
ware is available for North Star★ systems.

Write or call for descriptive literature.

Micro Mike's, Incorporated
905 South Buchanan • Amarillo, Texas 79101 • USA
(806) 372-3633

CIRCLE 170 ON READER SERVICE CARD

RECYCLE(D) COMPUTERS

BUY ☆ SELL ☆ SWAP

Hardware & Software

NEW PRODUCT ANNOUNCEMENTS

32 pages or more

Mailed 1st Class every 3 Weeks

1 yr. (18 issues) ☆ \$3.75

ON_LINE



Dave Beetle, Publisher Established 1975

24695 Santa Cruz Hwy. • Los Gatos, CA 95030

THE BEST WAY TO DETERMINE IF ON_LINE CAN BE OF VALUE TO YOU IS TO TRY A

FREE SAMPLE ISSUE

CIRCLE 181 ON READER SERVICE CARD

NOVEMBER 1979

OMNICOMPUTER PRODUCTS

S-100 • TRS-80 APPLE • PET ADD-ONS

SPEECH SYNTHESIZER

Quality, intelligible natural sounding **COMPUTALKER**
Speech Synthesizer, a proven superior product since 1976,
comes complete with Load 'N' Go software, user
documentation and source programs.

CT-1	S-100 Bus Plug-In.....	\$495
CT-1T	TRS-80 add on w/interconnect to self contained enclosure.....	\$95
CT-1A	Apple add on w/interconnect to self contained enclosure.....	\$95
CT-1P	Pet add on w/interconnect to self contained enclosure.....	\$95

FLEXIBLE DISK DRIVES

Quality single or dual headed single or multi-drive
configurations. Interconnects to self contained enclosures.
Load 'N' Go software and cable interconnects available
when required.

Flip Sided	35/40 TRACKS	Dual Sided
40F1 Single Drive \$400		40D1 Single Drive \$500
40F2 Two Drives \$700		40D2 Two Drives \$800
40F3 Three Drives \$990		40D3 Three Drives \$1090

ALL PRODUCTS

Fully Warranted - Sold Direct - Shipped Direct from Stock.
Please contact us for prompt, personal, professional service.

DIAL (714)


NO.1 OMNI

(714) 661-6664


32422 Alipaz St., San Juan Capistrano, CA 92675

CIRCLE 180 ON READER SERVICE CARD

Software for the Apple II



SCORE 100



SCORE 105

DYNAMAZE—a dazzling new real-time game. You move in a rectangular game grid, drawing or erasing walls to reflect balls into your goal (or to deflect them from your opponent's goal). Every ball in your goal is worth 100 points, but you lose a point for each unit of elapsed time and another point for each time unit you are moving. Control the speed with a game paddle; play as fast as ice hockey or as slowly and carefully as chess. Back up and to play any time you want to; it's a reversible game. By Don Stone. Integer Basic (plus machine language); 32 K; \$9.95.

ULTRA BLOCKADE—the standard against which other versions have to be compared. Enjoy Blockade's superb combination of fast action (don't be the one who crashes) and strategy (the key is to assemble your space—maximize yours while minimizing your opponent's). Play against another person or the computer. New high resolution graphics let you see how you fared in an area-or win reversibility to review a game in slow motion (or at 100 speed, if that's your style). This is a game that you won't want to get bored with! By Don Stone. Integer Basic (plus machine language); 32 K; \$9.95.

What is a **REVERSIBLE GAME**? You can stop the play at any point, back up and then do an "instant replay", analyzing your strategy. Or back up and resume the game at an earlier point, trying out a different strategy. Reversibility makes learning a challenging new game more fun. And helps you become a skilled player sooner.

WORLD OF ODYSSEY—a new adventure game utilizing the full power of Disk II, which enables the player to explore 252 rooms on 8 different levels full of dragons, dwarfs, elves, goblins, gold and jewels. AppleSoft II disk. \$19.95 includes diskette.

PERQUACKY—an exciting vocabulary game which pits the player against the clock. The object of the game is to form words from a group of 10 letters which the computer chooses at random. The words must be 3 to 10 characters in length with no more than 5 words of any particular length. Each player has only 3 minutes per turn. The larger the words the higher the score. AppleSoft II disk; \$9.95.

APPLESHIP—is a naval game in which two players enter their ships in respective oceans. Players take turns trying to blast their opponent's ships out of the water. The first player to destroy their opponent's ships may win the game. A great low-cost graphics game. AppleSoft II disk; \$14.95.

Available at your
local computer store

DEALER INQUIRIES INVITED

Call or write for our free
SOFTWARE CATALOG

Apple II is a registered
trademark of
Apple Computer, Inc.

P.O. BOX 157
PITMAN, NEW JERSEY 08071
(609) 289-2349

POWERSOFT, INC.

Programs Available on Diskette
at \$5.00 Additional

- Check or Money Order
- Includes \$5.00 fee for shipping and handling
- C.O.D. \$1.00 add'l charge
- Master Charge and VISA orders accepted
- New Jersey residents add 6% sales tax

CIRCLE 188 ON READER SERVICE CARD


```

4340 GOSUB B650
4350 GOTO 4110
4360 ZP=FNA(30),S1351=0
4370 GOTO 4010
4380 REM NOTHING SPECIAL,JUST JUNK ITEM
4390 IF S1352=1 THEN GOSUB B650
4400 PRINT "Thrown."
4410 S1231=1
4420 GOTO 400
4430 REM *** ATTACK *****
4440 GOSUB B260
4450 IF NOT (Z3=33 AND S1231=1 AND L1=82) THEN 4520
4460 REM HE CAN KILL DRAGON
4470 ZP=FNA(68)
4480 GOTO 410
4490 IF L1<82 THEN 2040
4500 ZP=FNA(69),S1351=0,D1=0
4510 GOTO 400
4520 IF S1351<1 THEN 4560
4530 REM TRYING TO MURDER TROLL
4540 ZP=FNA(25)
4550 GOTO 400
4560 IF NOT (Z3=26 OR Z330) THEN 4600
4570 REM DANGEROUS TO ATTACK THESE
4580 ZP=FNA(70)
4590 GOTO 400
4600 REM NOTHING TO ATTACK
4610 ZP=FNA(71)
4620 GOTO 400
4630 REM REM FEE: **
4640 GOSUB B260
4650 IF Z3<25 THEN 4690
4660 REM CAN'T FEED DRAGON
4670 ZP=FNA(24)
4680 GOTO 400
4690 IF S1201=1 THEN 4720
4700 B8=5000
4710 GOTO 2710
4720 IF L1=69 THEN 4760
4730 PRINT "I can't feed it."
4740 ZP=FNA(23)
4750 GOTO 400
4760 IF S1201=1 THEN 7400
4770 B1=1,S1201=0
4780 ZP=FNA(6)
4790 GOTO 400
4800 REM REM WATER RWE
4810 IF S161=1 THEN 4040
4820 B1="water"
4830 GOTO 2710
4840 IF L1<50 THEN 2200
4850 GOTO 141 OF 3060,4070,4920
4860 ZP=FNA(7)
4870 P1=1,S161=0=0
4880 GOTO 400
4890 ZP=FNA(6)
4900 B1=2,S161=0=0
4910 GOTO 400
4920 ZP=FNA(9)
4930 P1=0,S161=0=0
4940 GOTO 400

```



```

4950 REM *** LOCK ***
4960 IF L1=10 OR L1=11 THEN 4980
4970 REM NOTHING LOCKABLE
4980 GOTO 2200
4990 IF S1191=1 THEN 5020
5000 B8="love"
5010 GOTO 2710
5020 C=0
5030 ZP=FNA(10)
5040 GOTO 400
5050 S1231=1
5060 REM *** UNLOCK ***
5070 IF S1191=1 THEN 5000
5080 IF L1<10 AND L1<11 THEN 5120
5090 G=1
5100 ZP=FNA(11)
5110 GOTO 400
5120 IF L1<69 THEN 5200
5130 IF D1=0 THEN 5160
5140 ZP=FNA(12)
5150 GOTO 400
5160 IF C=0 THEN C=1,D1=2
5170 ZP=FNA(13)
5180 GOTO 400
5190 REM REM FREE ***
5200 IF L1<11 THEN 5240
5210 REM CAN'T FREE ANYTHING BUT BIRD
5220 ZP=FNA(2)
5230 GOTO 410
5240 IF S1311=1 THEN 5280
5250 B131=1,B1=0
5260 PRINT "Freed."
5270 IF L1<22 THEN 5350
5280 IF S131 THEN 400
5290 B8="snake"
5300 PRINT "The little bird attacks the snake."
5310 IF L1=82 THEN 5360
5320 PRINT "Drogs = 1000"
5330 S=0,A131=0
5340 GOTO 400
5350 IF L1<92 THEN 400
5360 B8="dragon"
5370 GOTO 500
5380 PRINT "Drogs burned to a crisp."
5390 S131=0
5400 GOTO 400
5410 REM REM MAKE ***
5420 IF NOT (L1<27) THEN 2200
5430 IF S1231=1 THEN 5460
5440 B8="rod"
5450 GOTO 2710
5460 B1M AT HERE LEAR FROGOL
5470 IF L1<19 AND L1<20 THEN 200
5480 REM YES
5490 GOTO 921 OF 4000,5510
5500 ZP=FNA(16)
5510 B1=1
5520 GOTO 400
5530 ZP=FNA(17)
5540 B1=0
5550 GOTO 400

```

```

5560 REM *** OPEN ***
5570 GOSUB B260
5580 IF Z3 THEN 5610
5590 PRINT "Open."
5600 GOTO 2040
5610 IF Z3=40 THEN 5070
5620 IF S1221=1 THEN 5650
5630 PRINT "I see no 'fish'."
5640 GOTO 400
5650 IF Z3=50 THEN 5680
5660 PRINT "I don't know how to open a 'fish'."
5670 GOTO 400
5680 IF S1191=1 THEN 5710
5690 ZP=FNA(16)
5700 GOTO 400
5710 IF S1231=0 THEN 5740
5720 REM W/S OPENED CLAR, SO I WANT DESCRIPTION OF THIS
5730 REM PUT PEARL IN CUL-DE-SAC
5740 S171=43,S1231=0,S1301=1,ZP=FNA(17)
5750 GOTO 400
5760 REM REM CLOSE ***
5770 GOSUB B260
5780 IF Z3=40 THEN 4940
5790 ZP=FNA(18)
5800 GOTO 400
5810 REM CIL
5820 IF K171=0 THEN 2200
5830 IF S1171=1 THEN 5860
5840 B8="egg"
5850 GOTO 5630
5860 IF L1<73 THEN 2240
5870 REM IS DOOR STILL KUSTED
5880 IF 02=1 THEN 2200
5890 D2=1,S1171=0=0,ZP=FNA(19)
5900 GOTO 400
5910 REM REM EAT ***
5920 IF K120 THEN 5950
5930 ZP=FNA(20)
5940 GOTO 410
5950 Z3=20
5960 GOSUB B490
5970 IF Z5=0 THEN 410
5980 ZP=FNA(21),S1201=0,B0=0
5990 GOTO 400
6000 REM REM DRINK ***
6010 IF K141 THEN 6040
6020 ZP=FNA(21)
6030 GOTO 410
6040 Z3=16
6050 GOSUB B490
6060 IF Z5=0 THEN 410
6070 ZP=FNA(22),S1201=0,B0=0
6080 GOTO 400
6090 REM REM SEE *** THE FOO ***
6100 IF L1<71 THEN 410
6110 ZP=FNA(21)
6120 GOTO 410
6130 IF S1171=1 THEN 6160
6140 REM MAKE NEST ***
6150 ZP=FNA(20)

```



ADVENTURE 'GAME'

Adventures are like no other programs you have ever seen. They are "electronic novels" or "role-playing games." Whatever description you hear, it is inadequate until you "play" one. But here's an attempt.

In any version you move from one location to another. The locations can be as varied as caverns, islands, or rooms in a house. You take or use objects in these locations either immediately, or carry them with you for later use. For example, a key found in one place may unlock a door in another. By collecting and using these items you strive to accomplish your mission which differs with each adventure.

Also, you interact with the program using short sentences like TAKE KEYS, THROW AX, etc. Part of the fun is figuring out what words the program understands.

The "adventure" is figuring out the mystery - how to complete your mission. This makes adventure like a crossword puzzle, a mystery novel, and more. All require 10k, level 11.

adventure

From Adventure International
Scott Adams has authored seven different machine language Adventures for quick responses. They support the optional lower case hardware, have a unique screen video driver with blinking cursor for easy reading, and have over a 100 word vocabulary. They are highly recommended by BO-US, insiders, and BO Software Critique.

1. ADVENTURELAND: Most like the original with caves, maze of pits, magic words and the dragon. \$14.95
 2. PIRATE'S ADVENTURE: "Yo Ho Ho and a bottle of rum..." Go from your London flat to Treasure Island searching for the pirate's buried treasure. \$14.95
 3. MISSION IMPOSSIBLE: "Your mission is..." Will you be able to complete your mission in time? Or is the reactor doomed? \$14.95
 4. VOODOO CASTLE: Count Cristo has had a fiendish curse put on him by his enemies. You're his only hope. \$14.95
 5. THE COUNT: Somewhere in Transylvania you awake in a large brass bed. Guard your neck. And watch for the postman. \$14.95
 6. STRANGE ODYSSEY: At the edge of the galaxy you find the ruins of an ancient alien culture and its treasures. \$14.95
 7. MYSTERY FUN HOUSE: Try to make it through the strangest Fun House before the park closes. \$14.95
- 1&2 or 6&7 on disk for \$24.95. 3,4&5 for \$39.95. Other combinations available.

80-adventure

Greg Hassett has created a series of four adventures. While they are written in BASIC, the response time is quick and they have about 40 rooms. Most enjoyable.

1. HOUSE OF 7 GABLES: Ring the bell, but you'll have to deal with the witch to leave. Check your score. \$9.95
2. JOURNEY TO THE CENTER OF THE EARTH: Escape after you fix your earthdigger, but watch out for the bugs. \$9.95
3. KING TUT'S TOMB: A true treasure hunt inside the cursed tomb. You'll be lucky to escape with your life. \$9.95
4. SORCERER'S CASTLE: Kill the evil, wicked sorcerer before he captures you. Then try to leave the castle. \$9.95
- All four on disk for \$35.00

dog star adventure

by Lance Micklus from TRS-80 Software Exchange
Aboard an enemy battleship you try to rescue the
princess, find the plans, retrieve the treasure
and blast off. \$9.95

treasure_dungeon2

Fight with the Savage Minotaur, ghouls, trolls, and other monsters to get their guarded treasure. But know when to withdraw. \$7.95



TRS-80

IF YOU'RE LOOKING FOR ANY TRS-80 SOFTWARE, GIVE US A CALL. THIS IS ONLY A SMALL SAMPLE OF OUR PRODUCTS. WE HAVE HUNDREDS OF TITLES IN STOCK. OUR PHONE IS ANSWERED 24-HOURS A DAY TO TAKE YOUR ORDER. SO ACT TODAY.

MAIL/FILE

A professional mailing list program requires support and thorough documentation by the publisher. Galactic Software provides 30 pages of documentation in a three ring binder and updates to registered owners. And the file interfaces with their line of business packages.

The program will sort over 600 records on a single diskette in seconds! Not minutes. Not hours. Retrieval is in either alphabetic or zip code order plus other criteria. Labels are printed in either standard or unique user defined label formats. And an optional message line is available. Also, it supports both company names and international addresses.

Each record consists of name, address, phone, and category codes. With the proper codes, thousands of sublists are possible. And, editing is simple.

Mail/File is excellent for customer billing, newsletters, direct mail, collection agencies, clubs, and many other organizations. A complete package on disk for \$99.00.

temple of apshai

from Automated Simulations
This first in the DungeonQuest(tm) series lets you take your hero into a magical and mythical labyrinth of over 200 rooms. You can encounter over 30 kinds of fearsome monsters who guard over 70 varied treasures. Some of the treasures are magical and can help you in exploring the underground complex, but look out for monsters and traps that spring at you from the walls and shadows of the rooms and passages you traverse. The Book of Lore fills in the background and describes the appearance of the temple as you go. You combat monsters, move, and grab treasure in real-time. Bring in characters from other fantasy role playing games, or let the innkeeper find thee a hardy fellow. Test your mettle against the servants of evil! For serious gamers... \$24.95 with Book of Lore.



```
edasm
DISK*MOD PATCH
```

by Roy Soltzoff from MisoSys

This machine language program modifies your copy of the Radio Shack Editor/Assembler for use with your minidisk and disk operating system. You can save and load both text source and assembled object files. You can read the directory and the space used and available while in the EDTASM. You can also kill files. It is a complete disk modification for one or more drives.

Other capabilities are also added. The block move command relocates a section of text to any other area. The global change command permits, for example, changing a label throughout the text. The pagination feature provides hardcopy on 8 1/2 by 11 pages on either single sheets or continuous paper. In addition, high memory can be reserved, like in BASIC, for machine language routines like printer drivers. You can also display the amount of memory remaining.

The <CLEAR> key is functional, the symbol table is sorted alphabetically and output is 5-across, the scroll up/down allows 15 lines on the screen, and the 'DEFM' assembly is improved. Lower case input is now permitted. Plus, you can branch to any address.

Upgrade your Editor/Assembler today. \$19.95

ATERM

by Tom Stibolt from Acorn Software

The complete ASCII terminal program with the features you need and want: truly full duplex, completely compatible with Radio Shack's RS-232, all 128 ASCII characters from the keyboard, support of lower case if a modification is made, and BELL sound on AUX line from the computer.

You can set baud rate, parity, word length, and number of stop bits from the keyboard, even while receiving. Output to the lineprinter is buffered in the computer's remaining memory so printers slower than the RS-232 can be used. Completely compatible with Radio Shack's communications package. Level II with modem. \$19.95

G S F

from Racet Computers

A collection of Fast, easy-to-use machine language routines: in memory sort with multiple variables and keys, array read/write to tape; compress, uncompress and move data, screen scrolling in any direction, save screens, and more. Thorough documentation and two BASIC programs with multiple examples on the tape. Specify 16, 32 or 48k when ordering. \$24.95

Credit card callers may phone us 24-hour a day.
Or clip the coupon and mail your order today!



THE PROGRAM STORE
4200 WISCONSIN AVE NW
PO Box 9609 DEPT. RED
WASHINGTON, D.C. 20016

☐ YES, please send me these TRS-80 programs:

postage: \$ 1.00
total:

name: _____
address: _____
city, state _____
& code _____
☐ Check payable to The Program Store
☐ MASTERCARD mc bank code: _____
☐ VISA exp date: _____
card number: _____
signature: _____






```

5750 CSUB=8800
5760 PRINT
5770 RETURN
5780 REM
5790 REM PRINT SUBC1 MOD, DESCRIPTION
5800 REM
5810 READ #2,I
5820 FOR J=1 TO I
5830 READ #2,H
5840 NEXT J
5850 WCL=1
5860 PRINT #3
5870 RETURN
5880 REM SPECIAL "FILE" IS
5890 IF NOT (Z=24 OR Z=30 OR Z=33) THEN
5900 REM CAN'T GET THESE FOR SOME REASON
5910 THE PAGE END
5920 Z=Z+1
5930 GOTO 5910
5940 GOTO 5910
5950 IF NOT (Z=1E AND C=0) THEN GOTO 5970
5960 REM UAHN
5970 Z=Z+1
5980 GOTO 5980
5990 REM BLANK-ITS THE FIRST UNLOCKED
6000 IF NOT (Z=26 AND D=12) THEN GOTO 6010
6010 GOTO 5980
6020 IF NOT (Z=14 AND D=14) THEN GOTO 6050
6030 GOTO 5980
6040 REM DRAWING & ROT
6050 Z=Z+1
6060 GOTO 5980
6070 IF NOT (Z=12 OR Z=17) THEN GOTO 6090
6080 REM C1 & WATER-OLD SAME, NEW 111
6090 PRINT "Why not use 111?"
6100 GOTO 5980
6110 IF NOT (Z=22 OR Z=3) THEN GOTO 6130
6120 REM TIME RHD, UAHN 111'S IN PAGE
6130 GOTO 5910
6140 REM END ONE
6150 GOTO 5910
6160 GOTO 5980
6170 IF Z=24 THEN GOTO 6180
6180 IF Z=30 THEN GOTO 6190
6190 IF Z=33 THEN GOTO 6200
6200 GOTO 5980
6210 IF Z=24 THEN GOTO 6220
6220 IF Z=30 THEN GOTO 6230
6230 IF Z=33 THEN GOTO 6240
6240 IF Z=12 THEN GOTO 6250
6250 REM FINAL CASE, BRIDE WTR IS IN 11
6260 PRINT "Case over!"
6270 GOTO 5910
6280 GOTO 5980
6290 IF Z=14 THEN GOTO 6300
6300 IF Z=17 THEN GOTO 6310
6310 IF Z=26 THEN GOTO 6320
6320 IF Z=30 THEN GOTO 6330
6330 IF Z=33 THEN GOTO 6340
6340 IF Z=1E THEN GOTO 6350
6350 IF Z=2E THEN GOTO 6360
6360 IF Z=3E THEN GOTO 6370
6370 IF Z=14 THEN GOTO 6380
6380 IF Z=17 THEN GOTO 6390
6390 IF Z=26 THEN GOTO 6400
6400 IF Z=30 THEN GOTO 6410
6410 IF Z=33 THEN GOTO 6420
6420 IF Z=1E THEN GOTO 6430
6430 IF Z=2E THEN GOTO 6440
6440 IF Z=3E THEN GOTO 6450
6450 IF Z=14 THEN GOTO 6460
6460 IF Z=17 THEN GOTO 6470
6470 IF Z=26 THEN GOTO 6480
6480 IF Z=30 THEN GOTO 6490
6490 IF Z=33 THEN GOTO 6500
6500 IF Z=1E THEN GOTO 6510
6510 IF Z=2E THEN GOTO 6520
6520 IF Z=3E THEN GOTO 6530
6530 IF Z=14 THEN GOTO 6540
6540 IF Z=17 THEN GOTO 6550
6550 IF Z=26 THEN GOTO 6560
6560 IF Z=30 THEN GOTO 6570
6570 IF Z=33 THEN GOTO 6580
6580 IF Z=1E THEN GOTO 6590
6590 IF Z=2E THEN GOTO 6600
6600 IF Z=3E THEN GOTO 6610
6610 IF Z=14 THEN GOTO 6620
6620 IF Z=17 THEN GOTO 6630
6630 IF Z=26 THEN GOTO 6640
6640 IF Z=30 THEN GOTO 6650
6650 IF Z=33 THEN GOTO 6660
6660 IF Z=1E THEN GOTO 6670
6670 IF Z=2E THEN GOTO 6680
6680 IF Z=3E THEN GOTO 6690
6690 IF Z=14 THEN GOTO 6700
6700 IF Z=17 THEN GOTO 6710
6710 IF Z=26 THEN GOTO 6720
6720 IF Z=30 THEN GOTO 6730
6730 IF Z=33 THEN GOTO 6740
6740 IF Z=1E THEN GOTO 6750
6750 IF Z=2E THEN GOTO 6760
6760 IF Z=3E THEN GOTO 6770
6770 IF Z=14 THEN GOTO 6780
6780 IF Z=17 THEN GOTO 6790
6790 IF Z=26 THEN GOTO 6800
6800 IF Z=30 THEN GOTO 6810
6810 IF Z=33 THEN GOTO 6820
6820 IF Z=1E THEN GOTO 6830
6830 IF Z=2E THEN GOTO 6840
6840 IF Z=3E THEN GOTO 6850
6850 IF Z=14 THEN GOTO 6860
6860 IF Z=17 THEN GOTO 6870
6870 IF Z=26 THEN GOTO 6880
6880 IF Z=30 THEN GOTO 6890
6890 IF Z=33 THEN GOTO 6900
6900 IF Z=1E THEN GOTO 6910
6910 IF Z=2E THEN GOTO 6920
6920 IF Z=3E THEN GOTO 6930
6930 IF Z=14 THEN GOTO 6940
6940 IF Z=17 THEN GOTO 6950
6950 IF Z=26 THEN GOTO 6960
6960 IF Z=30 THEN GOTO 6970
6970 IF Z=33 THEN GOTO 6980
6980 IF Z=1E THEN GOTO 6990
6990 IF Z=2E THEN GOTO 7000
7000 IF Z=3E THEN GOTO 7010
7010 IF Z=14 THEN GOTO 7020
7020 IF Z=17 THEN GOTO 7030
7030 IF Z=26 THEN GOTO 7040
7040 IF Z=30 THEN GOTO 7050
7050 IF Z=33 THEN GOTO 7060
7060 IF Z=1E THEN GOTO 7070
7070 IF Z=2E THEN GOTO 7080
7080 IF Z=3E THEN GOTO 7090
7090 IF Z=14 THEN GOTO 7100
7100 IF Z=17 THEN GOTO 7110
7110 IF Z=26 THEN GOTO 7120
7120 IF Z=30 THEN GOTO 7130
7130 IF Z=33 THEN GOTO 7140
7140 IF Z=1E THEN GOTO 7150
7150 IF Z=2E THEN GOTO 7160
7160 IF Z=3E THEN GOTO 7170
7170 IF Z=14 THEN GOTO 7180
7180 IF Z=17 THEN GOTO 7190
7190 IF Z=26 THEN GOTO 7200
7200 IF Z=30 THEN GOTO 7210
7210 IF Z=33 THEN GOTO 7220
7220 IF Z=1E THEN GOTO 7230
7230 IF Z=2E THEN GOTO 7240
7240 IF Z=3E THEN GOTO 7250
7250 IF Z=14 THEN GOTO 7260
7260 IF Z=17 THEN GOTO 7270
7270 IF Z=26 THEN GOTO 7280
7280 IF Z=30 THEN GOTO 7290
7290 IF Z=33 THEN GOTO 7300
7300 IF Z=1E THEN GOTO 7310
7310 IF Z=2E THEN GOTO 7320
7320 IF Z=3E THEN GOTO 7330
7330 IF Z=14 THEN GOTO 7340
7340 IF Z=17 THEN GOTO 7350
7350 IF Z=26 THEN GOTO 7360
7360 IF Z=30 THEN GOTO 7370
7370 IF Z=33 THEN GOTO 7380
7380 IF Z=1E THEN GOTO 7390
7390 IF Z=2E THEN GOTO 7400
7400 IF Z=3E THEN GOTO 7410
7410 IF Z=14 THEN GOTO 7420
7420 IF Z=17 THEN GOTO 7430
7430 IF Z=26 THEN GOTO 7440
7440 IF Z=30 THEN GOTO 7450
7450 IF Z=33 THEN GOTO 7460
7460 IF Z=1E THEN GOTO 7470
7470 IF Z=2E THEN GOTO 7480
7480 IF Z=3E THEN GOTO 7490
7490 IF Z=14 THEN GOTO 7500
7500 IF Z=17 THEN GOTO 7510
7510 IF Z=26 THEN GOTO 7520
7520 IF Z=30 THEN GOTO 7530
7530 IF Z=33 THEN GOTO 7540
7540 IF Z=1E THEN GOTO 7550
7550 IF Z=2E THEN GOTO 7560
7560 IF Z=3E THEN GOTO 7570
7570 IF Z=14 THEN GOTO 7580
7580 IF Z=17 THEN GOTO 7590
7590 IF Z=26 THEN GOTO 7600
7600 IF Z=30 THEN GOTO 7610
7610 IF Z=33 THEN GOTO 7620
7620 IF Z=1E THEN GOTO 7630
7630 IF Z=2E THEN GOTO 7640
7640 IF Z=3E THEN GOTO 7650
7650 IF Z=14 THEN GOTO 7660
7660 IF Z=17 THEN GOTO 7670
7670 IF Z=26 THEN GOTO 7680
7680 IF Z=30 THEN GOTO 7690
7690 IF Z=33 THEN GOTO 7700
7700 IF Z=1E THEN GOTO 7710
7710 IF Z=2E THEN GOTO 7720
7720 IF Z=3E THEN GOTO 7730
7730 IF Z=14 THEN GOTO 7740
7740 IF Z=17 THEN GOTO 7750
7750 IF Z=26 THEN GOTO 7760
7760 IF Z=30 THEN GOTO 7770
7770 IF Z=33 THEN GOTO 7780
7780 IF Z=1E THEN GOTO 7790
7790 IF Z=2E THEN GOTO 7800
7800 IF Z=3E THEN GOTO 7810
7810 IF Z=14 THEN GOTO 7820
7820 IF Z=17 THEN GOTO 7830
7830 IF Z=26 THEN GOTO 7840
7840 IF Z=30 THEN GOTO 7850
7850 IF Z=33 THEN GOTO 7860
7860 IF Z=1E THEN GOTO 7870
7870 IF Z=2E THEN GOTO 7880
7880 IF Z=3E THEN GOTO 7890
7890 IF Z=14 THEN GOTO 7900
7900 IF Z=17 THEN GOTO 7910
7910 IF Z=26 THEN GOTO 7920
7920 IF Z=30 THEN GOTO 7930
7930 IF Z=33 THEN GOTO 7940
7940 IF Z=1E THEN GOTO 7950
7950 IF Z=2E THEN GOTO 7960
7960 IF Z=3E THEN GOTO 7970
7970 IF Z=14 THEN GOTO 7980
7980 IF Z=17 THEN GOTO 7990
7990 IF Z=26 THEN GOTO 8000
8000 IF Z=30 THEN GOTO 8010
8010 IF Z=33 THEN GOTO 8020
8020 IF Z=1E THEN GOTO 8030
8030 IF Z=2E THEN GOTO 8040
8040 IF Z=3E THEN GOTO 8050
8050 IF Z=14 THEN GOTO 8060
8060 IF Z=17 THEN GOTO 8070
8070 IF Z=26 THEN GOTO 8080
8080 IF Z=30 THEN GOTO 8090
8090 IF Z=33 THEN GOTO 8100
8100 IF Z=1E THEN GOTO 8110
8110 IF Z=2E THEN GOTO 8120
8120 IF Z=3E THEN GOTO 8130
8130 IF Z=14 THEN GOTO 8140
8140 IF Z=17 THEN GOTO 8150
8150 IF Z=26 THEN GOTO
```

```

72720 GOTO 389E
72720 REM 100 SQUARE 07RD
72720 REM 29=EMAC37
72730 GOTO 390D
72730 REM BUTLE FULL IF 50, BUT CONTENTS
72730 IF NOT (Z804 AND 30) THEN 7360
72730 PRINT "CONTENTS AND THE 31"
72740 STOP
72750 GOTO 389E
72750 REM SPECIAL "SMULT"
72750 IF Z803A THEN 7460
72760 REM 100 IN CASE
72760 STOP
72760 IF 20=1 THEN PRINT "CODE AND 31"
72760 IF 20=2 THEN PRINT "INFO AND 31"
72760 GOTO 4120
72760 IF 20=3 AND 30 THEN 7400
72760 IF 20=4 THEN 7420
72760 IF 20=5 THEN 7440
72760 IF 20=6 THEN 7460
72760 IF 20=7 THEN 7480
72760 IF 20=8 THEN 7500
72760 IF 20=9 THEN 7520
72760 IF 20=10 THEN 7540
72760 IF 20=11 THEN 7560
72760 IF 20=12 THEN 7580
72760 IF 20=13 THEN 7600
72760 IF 20=14 THEN 7620
72760 IF 20=15 THEN 7640
72760 IF 20=16 THEN 7660
72760 IF 20=17 THEN 7680
72760 IF 20=18 THEN 7700
72760 IF 20=19 THEN 7720
72760 IF 20=20 THEN 7740
72760 IF 20=21 THEN 7760
72760 IF 20=22 THEN 7780
72760 IF 20=23 THEN 7800
72760 IF 20=24 THEN 7820
72760 IF 20=25 THEN 7840
72760 IF 20=26 THEN 7860
72760 IF 20=27 THEN 7880
72760 IF 20=28 THEN 7900
72760 IF 20=29 THEN 7920
72760 IF 20=30 THEN 7940
72760 IF 20=31 THEN 7960
72760 IF 20=32 THEN 7980
72760 IF 20=33 THEN 8000
72760 IF 20=34 THEN 8020
72760 IF 20=35 THEN 8040
72760 IF 20=36 THEN 8060
72760 IF 20=37 THEN 8080
72760 IF 20=38 THEN 8100
72760 IF 20=39 THEN 8120
72760 IF 20=40 THEN 8140
72760 IF 20=41 THEN 8160
72760 IF 20=42 THEN 8180
72760 IF 20=43 THEN 8200
72760 IF 20=44 THEN 8220
72760 IF 20=45 THEN 8240
72760 IF 20=46 THEN 8260
72760 IF 20=47 THEN 8280
72760 IF 20=48 THEN 8300
72760 IF 20=49 THEN 8320
72760 IF 20=50 THEN 8340
72760 IF 20=51 THEN 8360
72760 IF 20=52 THEN 8380
72760 IF 20=53 THEN 8400
72760 IF 20=54 THEN 8420
72760 IF 20=55 THEN 8440
72760 IF 20=56 THEN 8460
72760 IF 20=57 THEN 8480
72760 IF 20=58 THEN 8500
72760 IF 20=59 THEN 8520
72760 IF 20=60 THEN 8540
72760 IF 20=61 THEN 8560
72760 IF 20=62 THEN 8580
72760 IF 20=63 THEN 8600
72760 IF 20=64 THEN 8620
72760 IF 20=65 THEN 8640
72760 IF 20=66 THEN 8660
72760 IF 20=67 THEN 8680
72760 IF 20=68 THEN 8700
72760 IF 20=69 THEN 8720
72760 IF 20=70 THEN 8740
72760 IF 20=71 THEN 8760
72760 IF 20=72 THEN 8780
72760 IF 20=73 THEN 8800
72760 IF 20=74 THEN 8820
72760 IF 20=75 THEN 8840
72760 IF 20=76 THEN 8860
72760 IF 20=77 THEN 8880
72760 IF 20=78 THEN 8900
72760 IF 20=79 THEN 8920
72760 IF 20=80 THEN 8940
72760 IF 20=81 THEN 8960
72760 IF 20=82 THEN 8980
72760 IF 20=83 THEN 9000
72760 IF 20=84 THEN 9020
72760 IF 20=85 THEN 9040
72760 IF 20=86 THEN 9060
72760 IF 20=87 THEN 9080
72760 IF 20=88 THEN 9100
72760 IF 20=89 THEN 9120
72760 IF 20=90 THEN 9140
72760 IF 20=91 THEN 9160
72760 IF 20=92 THEN 9180
72760 IF 20=93 THEN 9200
72760 IF 20=94 THEN 9220
72760 IF 20=95 THEN 9240
72760 IF 20=96 THEN 9260
72760 IF 20=97 THEN 9280
72760 IF 20=98 THEN 9300
72760 IF 20=99 THEN 9320
72760 IF 20=100 THEN 9340
72760 IF 20=101 THEN 9360
72760 IF 20=102 THEN 9380
72760 IF 20=103 THEN 9400
72760 IF 20=104 THEN 9420
72760 IF 20=105 THEN 9440
72760 IF 20=106 THEN 9460
72760 IF 20=107 THEN 9480
72760 IF 20=108 THEN 9500
72760 IF 20=109 THEN 9520
72760 IF 20=110 THEN 9540
72760 IF 20=111 THEN 9560
72760 IF 20=112 THEN 9580
72760 IF 20=113 THEN 9600
72760 IF 20=114 THEN 9620
72760 IF 20=115 THEN 9640
72760 IF 20=116 THEN 9660
72760 IF 20=117 THEN 9680
72760 IF 20=118 THEN 9700
72760 IF 20=119 THEN 9720
72760 IF 20=120 THEN 9740
72760 IF 20=121 THEN 9760
72760 IF 20=122 THEN 9780
72760 IF 20=123 THEN 9800
72760 IF 20=124 THEN 9820
72760 IF 20=125 THEN 9840
72760 IF 20=126 THEN 9860
72760 IF 20=127 THEN 9880
72760 IF 20=128 THEN 9900
72760 IF 20=129 THEN 9920
72760 IF 20=130 THEN 9940
72760 IF 20=131 THEN 9960
72760 IF 20=132 THEN 9980
72760 IF 20=133 THEN 10000
72760 IF 20=134 THEN 10020
72760 IF 20=135 THEN 10040
72760 IF 20=136 THEN 10060
72760 IF 20=137 THEN 10080
72760 IF 20=138 THEN 10100
72760 IF 20=139 THEN 10120
72760 IF 20=140 THEN 10140
72760 IF 20=141 THEN 10160
72760 IF 20=142 THEN 10180
72760 IF 20=143 THEN 10200
72760 IF 20=144 THEN 10220
72760 IF 20=145 THEN 10240
72760 IF 20=146 THEN 10260
72760 IF 20=147 THEN 10280
72760 IF 20=148 THEN 10300
72760 IF 20=149 THEN 10320
72760 IF 20=150 THEN 10340
72760 IF 20=151 THEN 10360
72760 IF 20=152 THEN 10380
72760 IF 20=153 THEN 10400
72760 IF 20=154 THEN 10420
72760 IF 20=155 THEN 10440
72760 IF 20=156 THEN 10460
72760 IF 20=157 THEN 10480
72760 IF 20=158 THEN 10500
72760 IF 20=159 THEN 10520
72760 IF 20=160 THEN 10540
72760 IF 20=161 THEN 10560
72760 IF 20=162 THEN 10580
72760 IF 20=163 THEN 10600
72760 IF 20=164 THEN 10620
72760 IF 20=165 THEN 10640
72760 IF 20=166 THEN 10660
72760 IF 20=167 THEN 10680
72760 IF 20=168 THEN 10700
72760 IF 20=169 THEN 10720
72760 IF 20=170 THEN 10740
72760 IF 20=171 THEN 10760
72760 IF 20=172 THEN 10780
72760 IF 20=173 THEN 10800
72760 IF 20=174 THEN 10820
72760 IF 20=175 THEN 10840
72760 IF 20=176 THEN 10860
72760 IF 20=177 THEN 10880
72760 IF 20=178 THEN 10900
72760 IF 20=179 THEN 10920
72760 IF 20=180 THEN 10940
72760 IF 20=181 THEN 10960
72760 IF 20=182 THEN 10980
72760 IF 20=183 THEN 11000
72760 IF 20=184 THEN 11020
72760 IF 20=185 THEN 11040
72760 IF 20=186 THEN 11060
72760 IF 20=187 THEN 11080
72760 IF 20=188 THEN 11100
72760 IF 20=189 THEN 11120
72760 IF 20=190 THEN 11140
72760 IF 20=191 THEN 11160
72760 IF 20=192 THEN 11180
72760 IF 20=193 THEN 11200
72760 IF 20=194 THEN 11220
72760 IF 20=195 THEN 11240
72760 IF 20=196 THEN 11260
72760 IF 20
```


MICRO-BACKGAMMON 1.5

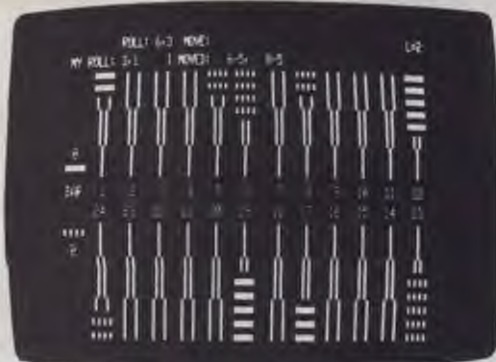

CHALLENGES YOU!

It's you and your wits against a sophisticated backgammon playing program. Will you be able to beat it? Micro-backgammon 1.5 utilizes modern strategies to play a challenging, exciting game. Features include 3 levels of play, set up or adjust any position, watch the computer play against itself, and more! A deluxe instruction book and easy to load cassette are included. It's written in Z-80 machine language.

Level I and Level II, 4K (& up) TRS-80\$19.95

Send check or money order to:

Questar Software

P.O. Box 723-C, Wichita, Kansas 67201

CIRCLE 192 ON READER SERVICE CARD

STOCK MARKET SYSTEM

For TRS-80 With Disk



Individual Chart on TRS-80

- INDIVIDUAL HIGH-LOW CHARTS
- COMPARISON CHARTS (IN COLOR ON APPLE)
- RUNNING AVERAGES PLOTTED/ERASED
- RESISTANCE/SUPPORT LINES PLOTTED/ERASED
- MAINTENANCE PROGRAM MAKES IT EASY TO UPDATE DATA, HANDLE STOCK SPLITS, ETC. . .
- ONE YEAR'S WORTH OF WEEKLY STOCK DATA (HIGH, LOW, CLOSE & VOLUME) ON YOUR CHOICE OF ANY STOCKS ON THE NYSE OR AMEX
- PROGRAMS & MANUAL\$79.95
- STOCK DATA\$9.95 per stock
- MANUAL ONLY\$4.95
- FOR MORE INFORMATION VISIT YOUR LOCAL COMPUTER STORE OR WRITE DIRECTLY TO:

RTR SOFTWARE INC.

DEPT. CC11

P.O. BOX 12351

EL PASO, TX 79912


AVAILABLE
ALSO FOR
APPLE II




CIRCLE 194 ON READER SERVICE CARD

SORCERER* SOFTWARE!

All programs on cassette
Only 8k of memory required

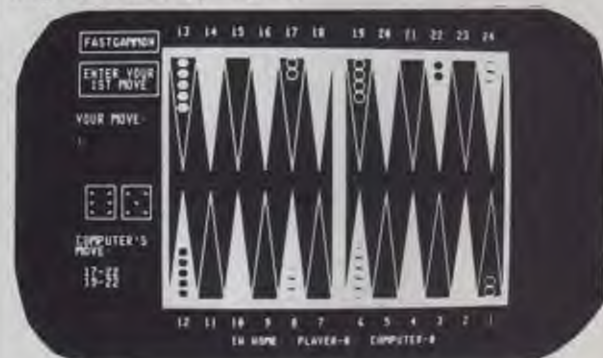

FASTGAMMON™ by Bob Christiansen. Thousands of people are already playing FASTGAMMON on TRS-80 and Apple. Now it's ready for SORCERER, with the sharpest graphics ever! Backgammon players love this machine language program that provides a skillful opponent. Eight-page instruction manual includes rules of backgammon. \$19.95

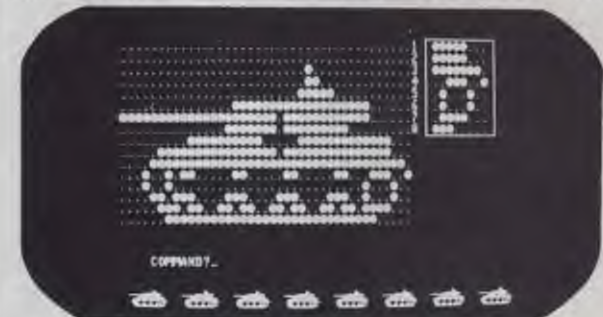

SHAPE MAKER™ by Don Ursem. Construct special characters and fancy shapes with ease using this on-screen character editor. Detailed 12-page instruction booklet includes example applications. \$14.95



PLOT by Vic Tolomei. Now Apple owners will be envious of how easy you can get good graphics on your SORCERER. PLOT includes both a super high resolution mode and a quick low resolution mode. Both are accessible from your BASIC programs using simple commands. Hi-res & lo-res examples included on tape. \$14.95

DEBUG by Bob Pierce. Debug machine language programs by stepping through one instruction at a time. Relocatable. Several display options. Multiple break points. Modify memory and registers. \$14.95

Z-80 DISASSEMBLER by Vic Tolomei. Decode machine language programs, including SORCERER'S monitor and ROM-PACs, with this Z-80 Disassembler written in BASIC. Instruction mode prints out machine code and Zilog mnemonics in standard format. Or use the ASCII mode which converts machine code to ASCII. \$14.95

MAGIC MAZE™ by Vic Tolomei. A challenging maze game. Ten levels of play. Holding your lantern, you wander through a maze trying to stay on the right path and avoid pitfalls. Automatic scoring tells you how good a pathfinder you are. \$11.95

SOFTWARE INTERNALS MANUAL FOR THE SORCERER by Vic Tolomei. A must for anyone writing software for the SORCERER. Seven chapters: Intro to Machine Language, Devices & Ports, The Monitor, Cassette Interface, BASIC structure, Video & Graphics, The Keyboard. Indexed. Includes diagrams and software routines. 64 pages. \$14.95



QUALITY SOFTWARE

6660 Reseda Blvd., Suite 103, Reseda, CA. 91335
Telephone 24 hours, seven days a week: (213) 344-6599

WHERE TO GET IT: Ask your nearest Sorcerer dealer to see Quality Software's Sorcerer programs. Or, if you prefer, you may order directly from us. MasterCard and Visa cardholders may telephone their orders and we will deduct \$1 from orders over \$19 to compensate for phone charges. Or mail your order to the address above. California residents add 6% sales tax. Orders outside North America add \$5 for registered airmail, pay in U.S. currency.

* The name "SORCERER" has been trademarked by Exidy, Inc.

CIRCLE 191 ON READER SERVICE CARD


```

7880 IF L1=26 AND RND(0)>.3 THEN Z9=FNA(41)
7890 REM 1000 DOOR
7900 IF L1=73 AND D2=8 THEN Z9=4 MAY(57)
7910 REM TROLL
7920 IF L1=60 OR L1=61 AND T=1 THEN Z9=FNA(53)
7930 REM BEAR
7940 IF L1=69 AND D1=0 THEN Z9=FNA(64)
7950 IF L1=65 AND D1=1 THEN Z9=FNA(66)
7960 REM PLANT IN P11
7970 IF L1=48 OR L1=50 THEN Z9=FNA(47+P1)
7980 RETURN

8000 REM PRINT LONG YOUR DESCRIPTION FROM "message" FILE
8010 REM DESCRIPTION IS NORMALLY L1+200 EXCEPT FOR
8020 REM MAZE OR FOREST
8030 REM GET V(L1) SO AS NOT TO REPEAT LONG DESCRIPTION MODE
8040 V(L1)=1
8050 IF L1=74 THEN B000
8060 Z9=FNA(200)
8070 GOTO B130
8080 IF NOT (L1=88 AND L1=98 OR L1=99) THEN B130
8090 Z9=FNA(288)
8100 GOTO B130
8110 REM NORMAL DESCRIPTION
8120 Z9=FNA(200+L1)
8130 RETURN
8140 REM
8150 REM BLUE DESCRIPTION (ONLY PRINT LONG DESCRIPTION
8160 REM IF HE HASN'T BEEN AT L1 BEFORE)
8170 REM
8180 REM ALWAYS GIVE LONG DESCRIPTION FOR FOREST AND MAZE
8190 IF L1=5 OR (L1=88 AND L1=98) OR L1=99 THEN B220
8200 IF V(L1) THEN B780
8210 REM HE HASN'T SEEN THIS ROOM, SO GIVE A LONG DESC.
8220 V(L1)=1
8230 GOTO 7990
8240 REM
8250 REM FITCH FIRST ITEM CODE IN X(1 TO T2)
8260 REM Z8=TOTAL # OF ITEMS FOUND IN LIST
8270 REM Z3=ITEM CODE FIRST 10000
8280 Z8=0, Z3=0
8290 RESTORE 7960
8300 FOR Z5=1 TO 45
8310 READ B4
8320 IF (L1=5)=0 THEN B360
8330 Z8=Z8+B4
8340 D4=B4
8350 IF K1Z1 AND Z8=1 THEN Z3=Z5
8360 NEXT Z5
8370 B4=D4
8380 RETURN
8390 REM NO FIRST ITEM AT ROOM
8400 RESTORE 9660
8410 FOR Z1=1 TO 47
8420 IF K1Z1 THEN RETURN
8430 NEXT Z1
8440 NEXT Z1
8450 RETURN
8460 REM
8470 REM
8480 REM
8490 REM MAKE SOME BEGS CARVING ITEM * 21
8500 IF C0=0 THEN B120
8510 IF S1(3)=1 THEN B530
8520 PRINT "You don't have the "
8530 Z5=0
8540 RETURN
8550 REM REM DWARF ***
8560 IF D3=0 THEN B640
8570 REM SHOULD DWARF GIVE AWAY AXE
8580 IF L1=13 THEN RETURN
8590 IF RND(0)>.05 THEN RETURN
8600 REM GIVE AWAY AXE
8610 Z9=FNA(80)
8620 S1(2)=L1, D3=1
8630 RETURN
8640 REM SHOULD DWARF ATTACK?
8650 IF L1=13 THEN RETURN
8660 IF S1(5)>.11 THEN B770
8670 IF RND(0)>.5 THEN RETURN
8680 REM YES!
8690 Z9=FNA(32)
8700 REM DOES THE KNIFE KILL PLAYER
8710 IF RND(0)>.35 THEN B750
8720 REM YES
8730 PRINT "IT KILLS YOU!"
8740 GOTO 9540
8750 PRINT "It misses!"
8760 RETURN
8770 REM SHOULD WE PUT A DWARF HERE?
8780 IF RND(0)>.2 THEN S1(5)=L1
8790 RETURN
8800 REM REM PRIVATE ***
8810 REM FIRST DOES HE HAVE ANYTHING WORTH STEALING?
8820 Z3=0
8830 IF L1=13 THEN RETURN
8840 FOR X=1 TO 15
8850 IF S1(X)=1 THEN Z3=Z3+1
8860 NEXT X
8870 IF Z3>RND(0.2)+1 THEN RETURN
8880 REM SHOULD WE KID OFF HIS VALUABLES?
8890 IF RND(0)>.05 THEN B920
8900 Z9=FNA(24)
8910 RETURN
8920 FOR X=0 TO 15
8930 Z9=FNA(33)
8940 IF S1(X)=1 THEN S1(X)=100
8950 NEXT X
8960 RETURN
8970 REM ***** SAVE GAME *****
8980 INPUT "What do you want to call the save file?"
8990 CREATE N, A, B
9000 IF NOT THEN PRINT "File "
9010 IF NOT THEN 410
9020 ASSIGN A, B, R
9030 PRINT "File "
9040 NEXT 9510
9050 PRINT "Game saved"
9060 IF K1(5) THEN 7750
9070 GOTO 410
9080 REM ***** END OF GAME *****
9090 IF C0=0 THEN B120
9100 PRINT "You already have a loaded game!"
9110 GOTO 410
9120 INPUT "Save file name?", A$
9130 ASSIGN A$, S, R
9140 IF R(5) THEN 9170
9150 PRINT "Unable to use file "
9160 GOTO 410
9170 READ S1(1), T2, T3, L1, L2, C, D1, S, D1, D2, D0, T, B1,
    B2, P1, D, L, C, D3, D3, R0
9180 PRINT "Starting new game..."
9190 GOTO 410
9200 C0=1
9210 GOTO 300
9220 REM *** READ THE MAGAZINE ***
9230 GOSUB 8280
9240 IF Z3=25 THEN 9270
9250 Z9=FNA(74)
9260 GOTO 410
9270 IF S1(25)=1 THEN 9380
9280 B4="magazine"
9290 GOTO 7710
9300 REM OK, LET HIM READ IT
9310 Z9=FNA(403)
9320 GOTO 400
9330 REM REM AFE BUG ABE
9340 ASSIGN S, S
9350 ASSIGN "MUG", S, R
9360 IF R(5) THEN 9150
9370 ON END T1 THEN 9520
9380 ADVANCE 65: 9999, R
9390 INPUT "Your name?", A$
9400 A$=A$+DATE$(1, 27)
9410 PRINT $, A$
9420 PRINT "Enter you name in up to five lines"
9430 FOR Z0=1 TO 5
9440 PRINT Z0
9450 INPUT A$
9460 IF A$="" THEN 9490
9470 PRINT $, A$
9480 NEXT Z0
9490 PRINT "Message recorded. Thank you!"
9500 ASSIGN S, S
9510 GOTO 410
9520 PRINT "End of file error."
9530 GOTO 410
9540 REM REM LINGARMA! HIM
9550 REM REM LINGARMA! HIM

```



∞ INFINITE BASIC ∞

RELOCATABLE MODULES FOR THE TRS LEVEL II AND DOS SYSTEMS
LOAD ANY OR ALL MODULES. FOR \$49.95 THE CORE PACKAGE INCLUDES:

∞ MATRIX PACKAGE ∞

Over 30 BASIC commands including:

- ∞ Matrix Read, Inverse, Transpose, and Identity. Simultaneous Equations!!!
- ∞ Add, Subtract, or Multiply Scalars, Vectors, or Multi-dimension arrays!!!
- ∞ Dynamically Reshape, Expand, Delete Arrays, Change arrays in mid-program.
- ∞ Copy array elements, set arrays to scalar, zero arrays, move arrays.
- ∞ Tape array read and write including string arrays.

FOR \$29.95 more get the ∞ BUSINESS PACKAGE ∞

- ∞ Eliminate round-off error!! Multiple precision packed decimal arithmetic. 127-digit max. accuracy
- ∞ Binary search or sorted arrays. Insert new elements in sorted arrays!!!
- ∞ Automatic page headings, footings, and pagination. Includes forced end-of-page.
- ∞ Automatic hash for record retrieval!! And more for your professional packages.

COMMAND PROCESSOR 'COMPROC' for \$19.95 (DOS only)

Extend DOS-AUTO command to perform multiple steps either at power-up or as a user command. Execute a script consisting of a sequence of commands or data from a BASIC command file.

REMODEL + PROLOAD for \$34.95 (Specify 16, 32, or 48K version)

REnumber any section of a program, MOve program segments, DElete program lines. Combine programs with renumber and merge. Load or save any portion of program from tape.

DISK SORT PROGRAM 'DOSORT' for \$34.95 (Specify 32 or 48K, minimum 2 disk system)

SORT/MERGE multi-diskette sequential files. Multiple variables and keys. Includes machine language in-memory sorts, comparators and string handling.

COPY SYSTEM TAPES with 'COPYSYS' for \$14.95 (Non-DOS)

∞ STRING PACKAGE ∞

Over 40 BASIC commands including:

- ∞ Left and right justify, truncate, rotate. Text justification. String centering.
- ∞ Delete or insert substring, Pack strings, Convert to upper or lower case.
- ∞ Translate characters, Reverse strings, Verify function, Number of occurrences.
- ∞ Masked string searches for simple or array variables. Encrypt or decrypt strings.
- ∞ Compress/uncompress character string arrays to 6 bits or less per character.
- ∞ AND the famous RACET machine language SORTS. Multi-key multivariable and string. Sort 1000 elements in 9 sec!!

FUTURE ∞ ADD-ON PACKAGES ∞ will include ∞ STATISTICS ∞ INPUT/OUTPUT ∞ GRAPHICS ∞

Attn: TRS Add-On OEM's: We can support your special hardware add-ons with direct BASIC commands. System Houses: We license System House usage of ∞ INFINITE BASIC ∞ modules.

Check, VISA, M/C C.O.D.
 Calif. residents add 6%

Telephone Orders Accepted
 (714) 637-5016

WHEN ORDERING PLEASE
 ADVISE PUBLICATION SOURCE

RACET COMPUTES
 702 Palmdale, Orange CA 92665

CIRCLE 193 ON READER SERVICE CARD

FREE! software catalog for Apple Owners

WE'RE SAVING ONE FOR YOU!

Here are a few highlights from our new catalog:

FILEMASTER 2 Programs: **FORMAT & RETRIEVAL** comprise a powerful Data File Manager. Great for everything from phone lists to legal abstracts. Design your own data structure. Up to 500 Char. per sec. Up to 15 searchable fields in any combo. Needs 32K Disk. . . . \$34.95


SPACE Multi-faceted simulation of life in interstellar society. You and opponents must make life & death decisions. Keeps track of your progress from one game to next. Six games in all. Needs 48K and Apple-soft ROM. . . . On Disk \$29.95

POT O' GOLD Our all new collection of 49 programs for 16K Apple. Everything from logic to action games. Only a buck a game. On Tape \$49. . . . On Disk \$54

ADVENTURE Fight off pirates and vicious dwarfs. 700 travel options, 140 locations, 64 objects. Needs Applesoft & 48K Disk \$29.95

APPLE MONITOR PEELED Everything you wanted to know about the Apple Monitor but couldn't figure out. User-written manual in plain English clears your confusion \$9.95

To order software, add \$2 shipping. Calif. residents add 6% sales tax. Or write today for your free catalog. VISA/Mastercharge welcome!



Garden Plaza Shopping Center, Dept. C11

9719 Reseda Blvd., Northridge, Ca 91324 • (213) 349-5560

TRS-80 SOFTWARE

- KENO** Play this Las Vegas favorite with Las Vegas rules and odds—\$14.95
- STOCK** Realistic Stock Market game with authentic market trends and risks factored in. Can be used to illustrate how the real market works—\$14.95
- SORT** A general purpose alpha-numeric sorting routine for most anything you type in. You may sort, print, save to disk and resort data again—\$14.95
- AMORT** A general purpose amortization program. Can print the schedule on screen or printer. Great for computing Car and Mortgage Payments—\$14.95
- DRAW** This is a Computerized Drawing Board. Pictures may be drawn, saved on disk as a Data File Program that may be RUN or MERGED to redraw—\$14.95
- UTILITY2** For the Serious Programmer, Makes writing programs simpler by the use of Labels instead of line numbers. Programs MUST be written with EDITOR1 so this UTILITY can be used to automatically line number the program—\$14.95
- BOOK** This utility organizes and prints data files such as chapters of a book which have been created individually using EDITOR1 program—\$24.95
- MENU** This is a Diskette Index that Catalogs, Loads, and Runs programs from a single index (MENU). This index may be screen or ineprinted, and up to 100 Programs may be individually selected, loaded, and run in one step—\$24.95
- DATAMAN3** This is a general purpose data management system, designed to help manage, organize, and use information. This program allows the user to define the input questions the computer will ask, and with the sorting routine built in, can be used on such jobs as inventory control, mailing lists, HAM radio operators log book or price lists. This is by far our most popular program. Superior to programs costing much more—\$49.95
- EDITOR1** This is a disk oriented Text and Program editor that aids in the preparation of letters, documents, and most any kind of text. Features are: FAST and EASY entry of text. Speed Typists will love that Powerful yet easy to learn edit commands, and global search and change. Variable line width and page size as well as vertical line spacing. Built in text and documentation status report: and many others—\$99.95

These programs were written for the TRS-80 Computer System and its peripherals. A minimum of 92K of memory and at least one disk drive are required for all. All software is supplied with Full Documentation PLUS applications examples.

For Quality Software—see "The Software People"—Since 1988.

SMALL COMPUTER SYSTEMS

2935 E. McDowell Rd. Phoenix, AZ. 85008 (602) 275-3108

Additional literature and manuals are available. Call or Write for prices.

*** PHONE ORDERS WELCOME ***
 *** MASTERCHARGE & VISA CARDS ACCEPTED ***
 ***** DEALER INQUIRIES INVITED *****

CIRCLE 199 ON READER SERVICE CARD

Welcome to adventure! Would you like instructions?

YES

Somewhere nearby is Colossal Cave, where many have found gold and treasure, though it is rumored that some who enter are never seen again. I will be your eyes and hands. Direct me with commands such as get, take, or look. Since you need to move around, you must usually enter commands directions (N, NE, E, SE, S, SW, W, or W or down), although you may sometimes use more vague verbs with which to move. I know of several objects in this game, such as a lamp and a bottle, I also know of special objects in the cave. Some of these objects have side effects, so there is a riddle in the cave that requires a little bird.

The object of this game is to gather as many treasures as you can and get them back in the house. You also run the risk of getting robbed or killed by some rather unfriendly inhabitants of the cave.

There are some useful commands that you should know about:

- Get, Look, Long, and Short--these commands control the amount of detail you get in descriptions.
- Look (or L)--gives a detailed description of your surroundings.
- Inventory (or I)--tells you what you are carrying.
- Quit, Stop, or End--these are self-explanatory.
- Save--by typing this, you may save your game and continue it at a later time.
- Continue--lets you continue an old game.
- Score--tells you how well you're doing.

Other helpful functions include:

* Multiple commands on one input line, for "Go south, Get car, Keys, Start car," (example only)

"Adventure" is a version of the game created by Billy Creather and Don Woods at M.I.T.

You are in a forest, with trees all around you.

YOU SOUTH

You are in a forest, with trees all around you.

GO EAST

You are in a valley in the forest beside a stream running along a rocky bed.

FOLLOW STREAM

What do you want to do with the stream?

FOLLOW IT

I don't know that word

GO NORTH

You are standing at the end of a road beside a small brick building. Around you is a forest. A small stream flows out of the building and down a rocky bed.

ENTER HOUSE

What do you want to do with the house?

ENTER

You are inside a building, which appears to be a house. You are in a room.

```

9550 R0=0001
9560 GOTO 00 IF 9580, 9610, 9740
9570 REM ASK HIM IF HE WANTS TO BE REINCARNATED
9580 Z9=FNA(75)
9590 GOSUB 9660
9600 GOTO 9630
9610 Z9=FNA(77)
9620 GOTO 9580
9630 IF Z0=0 THEN 9750
9640 Z9=FNA(76)
9650 REM PUT HIM BACK IN HOUSE, REARRANGE HIS STUFF
9660 S(18)=7 L=0
9670 FOR X=3 TO 12
9680 IF S(X)=1 THEN S(X)=L3
9690 NEXT X
9700 REM WE'VE PUT THE LAMP IN HOUSE AND OTHER ITEMS WHERE HE DIED
9710 L1=INT(RND(0.4)*1.2)+L3
9720 GOTO 9730
9730 REM THIRD DEATH--END OF GAME
9740 Z9=FNA(78)
9750 PRINT "Oh well..."
9760 GOSUB 9430
9770 STOP
9780 REM **** PITTS ****
9790 IF L1<13 OR (L1=1 AND (S(18)=1 OR S(18)=L3)) THEN 1210
9800 REM IS HE GOING TO FALL INTO A PIT?
9810 IF L1=16 OR L1=17 OR L1=19 OR L1=20 OR L1=25 OR L1=47 OR L1=48 OR L1=59 OR L1=60 OR L1=61 OR L1=75 OR L1=76 OR L1=98 THEN 9840
9820 GOTO 1210
9830 REM HE TELL HIM
9840 Z9=FNA(74)
9850 GOTO 9540
9860 REM *** SEEK A "YES" OR "NO"
9870 INPUT A$
9880 A$=UPR$(A$(1,1))
9890 IF A$(1,1) AND A$(1,1) THEN 9930
9900 IF A$="Y" THEN 9910
9910 IF A$="N" THEN 9920
9920 RETURN
9930 PRINT "Yes or No?";
9940 GOTO 9870
9950 REM
9960 DATA "Turne gold nugget", "bars of silver", "precious jewelery", "a
"many coins", "several diamonds", "fragile wind vane", "a
"glittering pearl", "nest of golden eggs", "jewel-encrusted trident", "a
"egg-sized emerald", "platinum pyramid", "golden chain", "a
"rare spices", "persian rug", "treasure chest", "water", "oil", "a
"brass lamp", "keys", "food", "bottle", "wicker cage", "a
"3-foot black rod", "claw", "magazine", "beer", "axe", "valiant mallet", "a
"shards of pottery", "aster", "bird", "roast", "crab", "snake", "a
"dworf", "ranch", "cycles", "house", "crates", "swords", "piano", "bridge", "a
"bat", "volcano", "peach"

```



There is a bottle of water here.
There is a brass lantern here.
There is a set of keys here.
There is food here.
There is a glass bottle here.

>GET EVERYTHING IN ROOM

What do you want to do with the room?

>TAKE EVERYTHING

Why not say "fill"?

brass lamp: taken

keys: taken

food: taken

Contents and the bottle: taken

>LEAVE

You're at road near house.

>S

You're beside a stream in a valley

>S

As your feet hit the water of the stream soldiers in full armor are in the rock. Downstream the streambed is bare rock.

>S

You are in a 20 foot depression flooded with dark dirt.

Set into the dirt is a square steel grate mounted in concrete.

A dry streambed leads into the depression.

The grate is locked.

>INVENTORY

You are carrying: water

bottle

>OPEN GRATE

What do you want to do with the grate?

>OPEN

Open I can't understand that!

>UNLOCK IT

The grate is unlocked.

>TELL IT

DOWN

You are in a small chamber beneath a 3x3 steel grate to the surface.

A low crawl over cobbles leads inward to the west.

The grate is unlocked.

>SAVING

QUIT

I can't understand that!

>QUIT

Save game: YES

What do you want to call the save file? CAVE SAVE

Game saved

Oh well...

Your score is now 17

You have explored 1/3 of the cave

That makes you a beginner adventurer.



Starting new game
You are below the grate.

The grate is unlocked.

>I

You are carrying: water

bottle

>LOOK

You are in a small chamber beneath a 3x3 steel grate to the surface.
A low crawl over cobbles leads inward to the west.

>WEST

You are crawling over cobbles in a low passage. There is a dim light at the east end of the passage.
There is a small wicker cage here.

>TAKE CAGE

wicker cage: taken

>W

It is now pitch dark. If you proceed you may fall into a pit.

>LIGHT LAMP

The lamp is now on

You are in a debris room filled with stuff washed in from the surface.
A low wide passage with cobbles becomes plugged with mud and debris here, but an awkward canyon leads upward and west. A note on the wall says "Magac Werd Xyzzy".
There is a 3-foot black red here.

>GET ROD. GO UP

3-foot black red: taken

You are in an awkward sloping east/west canyon.

>U

You are in a splendid chamber thirty feet high. The walls are frozen rivers of orange stone. An awkward canyon and a good passage exit from east and west sides of the chamber.
There is a little bird here.

>CATCH BIRD

Your load is too heavy. You'd best take inventory and drop something first.

>INVENTORY

You are carrying: water

bottle

wicker cage

>DROP ROD. CATCH BIRD

3-foot black red: dropped

bird: taken



short programs.....

Double Subscripts Become Single

If you have a version of BASIC which does not allow double subscripts, have you looked wistfully at all the interesting games and programs that contain lines like:

100 A(I,J) = I + J/10...?

Well, the situation really is far from hopeless. As a simple example, suppose you wanted to create and print a table of numbers. You want the table to have five rows and seven columns, and each entry in the table is to be a decimal number with the row number on the left of the decimal point and the column number on the right. Here is one way to do it with double subscripts:

```
20 FOR I=1 TO 5
30 FOR J=1 TO 7
40 A(I,J)=I+J/10
50 PRINT A(I,J);
60 NEXT J
70 PRINT
80 NEXT I
90 END
```

run

1.1	1.2	1.3	1.4	1.5	1.6	1.7
2.1	2.2	2.3	2.4	2.5	2.6	2.7
3.1	3.2	3.3	3.4	3.5	3.6	3.7
4.1	4.2	4.3	4.4	4.5	4.6	4.7
5.1	5.2	5.3	5.4	5.5	5.6	5.7

Can we achieve the same result without the use of double subscripts? Happily, the answer is yes. Add the following line:

35 N = 7*(I-1) + J

and change lines 40 and 50 to:

40 A(N) = I + J/10
50 PRINT A(N);

The secret is at line 35. In general, to imitate the variable A(I,J), use A(C*(I-1) + J) where C is the number of columns in your array.

It's that simple.

With this technique, for instance, I have been able to translate Gregory Yob's "HUNT THE WUMPUS" into Radio Shack's Level I BASIC, which allows only single subscripts.

Well, what are you waiting for? Get out those back issues of *Creative Computing* that had all the games you thought you couldn't program.

Now you can.

James Garon
Math Dept.
Calif. State University
Fullerton, CA 92634

Prime Factors

Here's a short prime factoring program submitted by J. Jeffery. Operation of the program is explained in the Remark statements.

```
100 PRINT "PRIME FACTORING PROGRAM"
110 PRINT "INPUT POSITIVE INTEGER TO BE FACTORED:"
120 INPUT X1
130 PRINT "THE PRIME FACTORS ARE AS FOLLOWS:"
140 REM: X2 REPRESENTS THE DIVISORS USED TO TEST NUMBER.
150 X2=2
160 GOSUB 300
170 X2=3
180 GOSUB 300
190 REM: LINES 170 THROUGH 230 GENERATE ALL PRIMES REQUIRED
200 REM: AS DIVISORS. ALSO, SOME COMPOSITES ARE GENERATED.
210 REM: BUT THE EQUATIONS REDUCE THE NUMBER CONSIDERABLY.
220 FOR N=X2 TO SQR(X1)/6
230 X2=X2+N*5
240 GOSUB 300
250 X2=X2+N*7
260 GOSUB 300
270 NEXT N
280 GOTO 390
290 REM: SUBROUTINE TESTS DIVISIBILITY.
300 X4=INT(X1/X2)*X2
310 X4=INT(X1/X2)*X2
320 IF X4=1 THEN 370
330 PRINT X2;
340 X1=X1/X2
350 IF X1=1 THEN 390
360 GOTO 310
370 RETURN
380 PRINT X1
390 END
```

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
156
THE PRIME FACTORS ARE AS FOLLOWS:
2 2 2 7

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
999991
THE PRIME FACTORS ARE AS FOLLOWS:
17 59 997

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
999919
THE PRIME FACTORS ARE AS FOLLOWS:
991 1009

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
78191
THE PRIME FACTORS ARE AS FOLLOWS:
8191

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
7518518
THE PRIME FACTORS ARE AS FOLLOWS:
2 3 5 7 11 13 17

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
9999199
THE PRIME FACTORS ARE AS FOLLOWS:
999199

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
9999919
THE PRIME FACTORS ARE AS FOLLOWS:
991 1009

PRIME FACTORING PROGRAM
INPUT POSITIVE INTEGER TO BE FACTORED:
99919
THE PRIME FACTORS ARE AS FOLLOWS:
3 3 1091

Indefinite Articles

When I was typing *ANIMAL* (from *BASIC Computer Games*) into my system, I noticed that the program did not provide for the proper article preceding a noun. This user defined function takes as its argument any word, and catenates "A" or "AN" as appropriate.

Here it is in two different BASICs:

```
DEF FNA(X$)="A"+LEFT$( "N",INSTR(1,"aeiouAEIOU",LEFT(X$,1)))+" "+X$
DEF FNA(X$)="A"+SEG$( "N",1,POS("aeiouAEIOU",SEG$(X$,1,1)))+" "+X$
```

```
10 DIM A(35)
20 FOR I=1 TO 5
30 FOR J=1 TO 7
35 N = 7*(I-1)+J
40 A(N) = I + J/10
50 PRINT A(N);
60 NEXT J
70 PRINT
80 NEXT I
90 END
```

run

1.1	1.2	1.3	1.4	1.5	1.6	1.7
2.1	2.2	2.3	2.4	2.5	2.6	2.7
3.1	3.2	3.3	3.4	3.5	3.6	3.7
4.1	4.2	4.3	4.4	4.5	4.6	4.7
5.1	5.2	5.3	5.4	5.5	5.6	5.7

So the result of
PRINT FNA("HAWK"), FNA("OWL")
would be:
A HAWK AN OWL

Brian Hammerstein
5700 Arlington Avenue
Riverdale, NY 10471



short programs

Rorschach II



This program is written for the TRS-80, Level I. It simulates random Rorschach-like patterns. The program will continue to run with no user input. To stop, use the BREAK key.

```
100 CLS
150 X=1:Y=23
200 C=200
300 F.B=1 TO C
400 A(B)=RND(3)
500 N.B
600 F.B=1 TO C
700 DM(A(B)*B,1000,2000,3000
800 IF(Y<1)+(Y>47)T.950
820 S.(X,Y)
830 S.(127-X,Y)
850 S.(X,47-Y)
870 S.(127-X,47-Y)
900 N.B
950 F.U=1 TO 1000:N.U:CLS
970 G.150
1000 X=X+1
1100 G.800
2000 Y=Y+1
2100 G.800
3000 Y=Y-1
3100 G.800
```

Reprinted from Micronews, January 1979, published by the Cuatro Computer Club; Ave Los Pinos EDF, Airosa #5, La Florida—Caracas, VENEZUELA.



```
LIST
10 ***** INTEREST CALCULATION *****
20 WITH
30 ***** DATE CONVERSION *****
40
50 PRINT : PRINT : PRINT
60 PRINT "ENTER BEGINNING DATE (MM/DD/YY) : "; INPUT A$
70 PRINT : PRINT "ENTER ENDING DATE (MM/DD/YY) : "; INPUT B$
80 PRINT : INPUT "ENTER AMOUNT : "; A
90 PRINT : INPUT "ENTER INTEREST RATE : "; I
100 PRINT: PRINT: PRINT: PRINT
110 IF I<1 THEN I=1/100
120 M=VAL(LEFT$(B$,2))-VAL(LEFT$(A$,2))
130 D=VAL(MID$(B$,4,2))-VAL(MID$(A$,4,2))
140 Y=VAL(RIGHT$(B$,2))-VAL(RIGHT$(A$,2))
150 IF M<0 THEN M=12-M: Y=Y-1
160 IF D<0 THEN D=30+D: M=M-1: IF M<0 THEN Y=Y-1: M=M+12
170 PRINT TAB(20); "AT " ; (I*100); "%
180 PRINT TAB(10); "FROM " ; A$ ; " TO " ; B$
190 DAYS=D+(Y*360)+(M*30)
200 RATE=(I*A)/360
210 AMT = DAYS * RATE
220 PRINT : PRINT TAB(10); "AMOUNT OF INTEREST"
230 PRINT TAB(22); USING "#####.##";AMT
240 END
```

Date Conversion

This short routine takes a beginning date and ending date, and calculates the elapsed time involved. The advantage of this routine is that it allows the dates to be entered in the standard MM/DD/YY format. Entered as strings, the numerical values are then extracted using string handling routines.

This routine can be very useful in a program where elapsed time is used as a factor in calculations. The interest calculation program shows an example of how this routine can be used in a program. This is only one example of how the routine can be used.

The calculations are based on 30 day months and 360 day years, as are most business oriented tasks such as the interest example.

Joe Ligori
2660 W. Ball Rd. #91
Anaheim, CA. 92604

```
LIST
10 ***** DATE CONVERSION *****
20
30 PRINT : PRINT : PRINT
40 PRINT "ENTER BEGINNING DATE (MM/DD/YY) : "; INPUT A$
50 PRINT: PRINT "ENTER ENDING DATE (MM/DD/YY) : "; INPUT B$
60 PRINT: M=VAL(LEFT$(B$,2))-VAL(LEFT$(A$,2))
70 D=VAL(MID$(B$,4,2))-VAL(MID$(A$,4,2))
80 Y=VAL(RIGHT$(B$,2))-VAL(RIGHT$(A$,2))
90 IF M<0 THEN M=12-M: Y=Y-1
100 IF D<0 THEN D=30+D: M=M-1: IF M<0 THEN Y=Y-1: M=M+12
110 PRINT "MONTHS : ";TAB(20);M
120 PRINT "DAYS : ";TAB(20);D
130 PRINT "YEARS : ";TAB(20);Y
140 END
```

ENTER BEGINNING DATE (MM/DD/YY) : 7 10/08/77

ENTER ENDING DATE (MM/DD/YY) : 8 03/04/78

MONTHS : 8
DAYS : 26
YEARS : 0

ENTER BEGINNING DATE (MM/DD/YY) : 9 08/28/76

ENTER ENDING DATE (MM/DD/YY) : 9 10/25/78

MONTHS : 1
DAYS : 27
YEARS : 2



RUN

ENTER BEGINNING DATE (MM/DD/YY) : 9 04/22/75

ENTER ENDING DATE (MM/DD/YY) : 9 10/24/78

ENTER AMOUNT : 1000

ENTER INTEREST RATE : 7.5

1000 AT 7.5
FROM : 04/22/75 TO 10/24/78

AMOUNT OF INTEREST
\$245.39

TRS-80 solution



HARDSIDE™

Your market for new and used micro-computer equipment.

Telephone 603-673-5144
 COD orders require 25% cash deposit
 Prices do not include shipping

SOFTSIDE

SoftSide is for those who have adopted a TRS-80, and unleashed their imaginations. - a magazine that helps you discover the endless variety of tasks your new friend will do for you.

Every month we publish games, household applications, educational aids, business programs.

SoftSide means Software! 1 Year - 12 issues \$18.00

PROG 80

A bi-monthly magazine for the serious programmer who wants to know HOW his computer works and WHY. Machine language, construction projects, specialized applications software... not just for the advanced computer hobbyist, but for the computerphile who wants the most from his machine.

1 Year - 6 issues \$15.00

APPLE SEED

If you're an Apple II owner, you've been longing for a good software publication and hoping someone would get around to it.

We have. Apple Seed is to the Apple II what SoftSide is to the TRS-80. And it's brand new. Apple II enthusiasts will eat up this special introductory offer! 1 Year - 12 issues \$15.00

NEW			USED	
UNIT	RETAIL LIST PRICE	HARDSIDE DISCOUNT PRICE	WE'LL PAY	SELL
Level I 4K	\$499	\$449	\$275	\$375
Level II 4K	\$619	\$557	\$370	\$475
Level I 16K	\$729	\$656	\$365	\$475
Level II 16K	\$849	\$764	\$500	\$650
Level II 16K, No Keypad		\$669	\$450	\$600
EXPANSION INTERFACE				
.... 0K	\$299	\$269	\$175	\$240
.... 16K	\$448	\$369/\$403	\$225	\$315
.... 32K	\$597	\$469/\$537	\$275	\$390
DISK DRIVES				
Radio Shack #0	\$499	\$449	\$275	\$399
Radio Shack #1	\$499	\$449	\$250	\$375
Percom TFD-100		\$399		
Percom TFD-200 dual density 197K		\$675		

NEW			USED	
	RETAIL LIST PRICE	HARDSIDE DISCOUNT PRICE	WE'LL PAY	SELL
PRINTERS				
* Centronics 779	\$1559	\$1000	\$650	\$850
Tractor Feed				
* Centronics P1	\$499	\$399	\$250	\$325
Quick Printer II	\$219	\$197	\$125	\$175
Line Printer II	\$999	\$899		
Line Printer III	\$1999	\$1799		
* Requires Cable	\$39	\$35	\$20	\$30
R/S 25-1401				
TRS-80 HARDWARE ACCESSORIES				
Telephone Interface II	\$199	\$179	\$100	\$150
16K Memory Kits	\$140	\$99		
RS232C Serial Interface	\$99	\$89	\$50	\$75
TRS-232 Interface		\$40		
Data Dubber		\$49		
Line Cord Suppressor/Filter		\$32		

MS

UTILITIES

8080-Z80 Conversion by M. Kelleher. Permits you to enter 8080 codings and returns the Z80 equivalent. L II, 16K \$15.00.

KVP Extender by Lance Micklus. Corrects keyboard bounce, upper case lock, permits use as a terminal, screen printing. On tape (\$24.95) or disk (\$29.95)

Level III Basic by Microsoft. The most powerful BASIC you can buy for the TRS-80 in 5k of space, opens up fantastic new dimensions! Disk programming power, graphics commands, editing commands, long error messages, hex and octal constants and conversions, user-defined functions, much more! You get power that might otherwise cost you hundreds of dollars in additional equipment. It's like getting a whole new computer! \$49.95.

MMSFORTH by Miller Microcomputer Services. New version of the powerful, fast FORTH language compiler for TRS-80. Disk version offers virtual memory, supports one to four disk drives, has both disk and tape input/output capabilities. A stack-oriented structured language at an affordable price. MMSFORTH cassette version, Level II, 16K \$39.95
MMSFORTH disk version, Level II, 16K \$49.95
MicroFORTH primer \$15.00

TRS-80 Fortran. Includes the finest Z-80 development software available: Z-80 Macro Assembler, text editor, linkage loader, plus ANSI Fortran IV on two minidisks - requires a 32K system with one disk drive. NEW REDUCED PRICE \$150. (separately \$80.00.)

System Copy by Kalman Bergen. Makes backup copies of object ("system") tapes. Features include copy, verify read, rename, verify write. No knowledge of machine language required. Level II, 16K \$9.95.

NEWDOS by Apparat. DISK ERRORS SOLVED! Stop blaming your drive, fix your DOS with NEWDOS: an enhanced disk-operating system capable of correcting over 70 errors in TRSDOS 2.1 to improve reliability, and key bounce, enable DOS commands to be called from BASIC and much more! Available NOW for 16K systems with a minimum of 1 disk drive. \$49.95.

NEWDOS+ by Apparat. Includes all the features of the original NEWDOS and adds 7 new utilities, including SUPERZAP, Disk Editor/Assembler, Disassembler, and Level I BASIC for Disk. \$99.95

NEW TITLES

Secrets of Tarot	\$9.95
Magic Paper Calculator	9.95
Directory (Disk)	9.95
Alien Invasions	9.95
Form Letter Typewriter	24.95
Casino Anthology	7.95
Five Card Stud	
Five Card Draw	
Slot Machine	
War Game	7.95

WRITE FOR OUR FREE 80-PAGE CATALOG

ACTION GAMES

Tai Pan by Art Canfil. Sail the China seas, dodging pirates and cutthroats, to make your fortune trading in arms and opium. Level II, 16K. \$9.95.

Slalom by Denilo Hamlin. Choose between Slalom, Giant Slalom and Downhill. Level II, 16K \$7.95.

Air Raid by Small Systems Software. High speed machine language program with large and small aircraft flying at different altitudes. Ground-based missile launcher aimed and fired from keyboard. Planes explode when hit, cause damage to nearby aircraft. Score tallied for hits or misses. Level I or II, 4K \$14.95.

All Star Baseball by David Bohike. Level II, 16K \$7.95.

Batter Up by David Bohike. Level II, 16K \$5.95.

X-Wing Fighter II by Chris Freund. Piloting an X-Wing fighter, you're out to destroy the Death Star! A new, improved version of an exciting space favorite. Level II, 16K. \$9.95.

Ten Pin by Frank Rowlett. A game of coordination, the scoring is true to the rules of the sport. Level II, 16K \$7.95.

Balloon Race by Dean Powell. High above the Atlantic, your balloon must be cleverly maneuvered with the prevailing winds to reach Paris. Level II, 16K. \$9.95.

Adventures by Scott Adams. Feel as if you're manipulating HAL from 2001 when you play these machine language games. Hardly any rules, finding out is part of the fun. Two adventures on 32K disk, \$24.95. Tape - choose from Land Adventure, Pirate's Cove, Mission Impossible, The Count, Voodoo Castle, Strange Odyssey, and Fun House. \$14.95 each.

Dog Star Adventure by Lance Micklus. You're trapped aboard an enemy battleship... can you find the gold, rescue the princess, discover the plans and safely escape? Level II, 16K \$9.95.

Journey To The Center Of The Earth by Greg Hassett. Excellent introduction to the excitement of ADVENTURE. Written in BASIC for ease of understanding, yet fast and fun!! Level II, 16K tape \$7.95.

Amazin' Mazes by Robert Wallace. Ever-changing maze situation. Level II, 16K \$7.95.

Kamikaze by Russell Starkey. Command your ship against attacking suicide planes. Machine language graphics make this fast and fun! L II, 16K \$7.95

Space Battles by Level IV. Assume the role of Galactic mercenary, roaming the universe in search of enemy aliens and the bounty you reap from destroying their ships! Danger, thrills, fast action - and financial headaches as well! Features three levels of play, fast, machine language graphics; real-time input; Level II, 16K Tape or 32K Disk. Tape - \$14.95; Disk - \$19.95.

TS&E
SOFTWARE
EXCHANGE
P.O. BOX 68, Milford, NH 03055

CIRCLE 205 ON READER SERVICE CARD

SIMULATIONS

3-D Tie Tac Toe by Scott Adams. Three skill levels - author warns you to practice before tacking computer's third skill level. II, 16K \$7.95

Star Trek III.3 by Lance Micklus. One of the most advanced Star Trek games ever written. Level II, 16K \$14.95.

End Zone by Roger W. Robitaille, Sr. Authentic football simulation, right down to the 2-minute warning. Level I or II, 16K \$7.95

Cribbage by Roger W. Robitaille, Sr. You versus the computer - cribbage played by standard rules. Level II, 16K, \$7.95.

'Round The Horn by Rev. George Blank. You're the captain of a clipper ship racing from New York to San Francisco. Level II, 16K \$9.95.

Concentration by Lance Micklus. One of the most popular television games. Level II. 16K \$7.95.

Safari by David Bohike. You're in the running for a film contract at a major Hollywood studio. To qualify, you must photograph the most wild animals in their natural habitat. Level II, 16K \$7.95.

Pork Barrel by Rev. George Blank. Place you in the shoes of an aspiring Congressman. Level II, 16K \$9.95.

Backgammon by Scott Adams. Level II, 16K \$7.95

Chess Companion by M. Kelleher. Combines chess clock features with ability to record your moves while action is fast and furious. Level II, 16K \$7.95

Sargon Chess by Dan and Kathe Spracklen. Winner of the 1978 San Jose Microcomputer Chess Tournament. Level II, 16K \$19.95

PERSONAL

RPN Calculator by Russell Starkey. A self-documenting calculator program. Uses Reverse Polish Notation with 4-level stack, 100 memories, scientific functions. Level II, 16K \$9.95.

Home Financial Management by M. Kelleher. Turns your computer into a personal financial advisor. Level II, 16K \$9.95.

Ham Radio by M. Kelleher. Amateur Frequency Allocations, ID Timer, C-signal File, Amateur Log Routine, Propagation Forecasting. L II, 16K \$9.95
Special Disk-enhanced version, 32K \$24.95

Educator Assistant by Steve Reisser. Five programs of value to educators. Compute percentage, individual student averages, class averages, standard test scores, final grades. L II, 16K \$9.95 D, \$14.95.

Typing Tutor by BOUS. A set of programs designed to teach you touch typing. Takes you from basics to high-speed drill, with quizzes and grades. Progress at your own pace, and have fun mastering an enormously useful skill. Level II, 16K - \$19.95.

Personal Finance by Lance Micklus. 33 different budgets can be easily adapted by user to fit his individual needs. A 2-part program, entry and search. Level II, 16K \$9.95.

Advanced Personal Finance by Lance Micklus. Same as above with advanced analysis routine. **Supports Disk Files D, 32K** \$24.95.

Basic Statistics by Steve Reisser. Pearson product-movement correlation coefficient, chi-square, Fisher T-test, sample analysis of variance, Z-scores and standard scores, with a random number generator built in to simulate data. L II, 16K \$20.00.

DEALER INQUIRIES INVITED

Telephone orders accepted for Master Charge or VISA accounts. Call Monday through Friday, 9:00 a.m. to 9:00 p.m.
Telephone: 603-673-5144

ium...compendium...co

STANFORD SCIENTISTS "HOUSEBREAK" THE COMPUTER

The care and feeding of programmers is not what the computers at Stanford University's Artificial Intelligence Laboratory are all about. It just seems that way sometimes.

On a recent afternoon, Lester Earnest studied the food on display in a vending machine and then typed his choice onto the computer terminal next to it. The appropriate door unlocked, and he pulled out an empanada. No money changed hands. Earnest, who is associate director of the lab, will be billed at the end of the month.

In many respects there seems little that the machine can't do for the scientists at AI Lab. The computer system handles their correspondence, corrects their spelling, keeps them up to date on news stories, plays games with them, reminds them of business appointments and of their children's birthdays. And what computers do for them, the rest of us may experience shortly.

The Stanford scientists are working on the protocols for a national computer network that would use telephone lines to supply such services to home or office computers. Called Dialnet, the project is financed by the National Science Foundation.



Lester Earnest, associate director of Stanford's Artificial Intelligence Lab, with robot helpers used in mechanical assembly work. (Photo by Christopher Springmann).

Millions of Americans will eventually have an enormous variety of services brought to their homes via a typewriter-like keyboard and a TV screen. It is predicted that within the next five to twenty years, personal computers will be as common in American homes as TV sets are now.

Up to now, home computers have largely been used for playing games, for filling favorite recipes or income tax information, and for other self-contained activities. But Earnest suggests that the computer's real value will be to bring the world inside, to serve as a "porthole into external services. That's not here yet for most people," he says.

At Stanford, much of what will one day be available to the average consumer is already at hand. For example, the AI Lab is hooked up, via phone line, to the Associated Press and New York Times wire services. AI scientists have access to news stories as they break. Earnest is enthusiastic about the possibility of writing instant letters to the editor, of talking back to the source. Home readers could ask for more information on a subject while reporters add to and change their stories. News articles may also be stored and indexed for research purposes, and consumers should eventually be able to buy access to reference libraries.

The computer also offers the most personalized service. Both business and personal messages are printed out automatically whenever the scientist asks for them. There is a feature in the programs that will remind a graduate student of a class or dentist appointment. Many of the programmers keep lists of important telephone numbers or their appointment calendars on the computer.

Earnest comments that he has "automated a lot of our bureaucracy here." There is one business manager and three secretaries for more than a hundred people. "The

secretaries don't do much typing; people do their own," says Earnest who writes and edits his own reports and correspondence on the computer.

Spelling is routinely corrected; the computer has been fed the 10,000 most common English words. However, it cannot correct grammar. Earnest says, "Despite my high school English teacher, we still don't understand syntax. We cannot program it."

The Stanford computer has been programmed to provide a number of extras on demand. A file called YUMMY lists restaurants from Seattle to London that have been recommended by local programmers. Each day two fortune cookie sayings and two versions of pornographic remarks are there for the asking. Scientists who are hooked on soap operas can have their favorite switched on automatically.



The computer knows who is working at his or her terminal at any given time, and it also knows quite a lot about them. On clear afternoons, the words BOUNCE-BOUNCE may flash across the screen of a volleyball player, signaling that a game is being organized.

Then there's that food vending machine which solves the problem of hungry programmers who don't have the right change. It provides fun and games as well. Every so often, a bell announces free food. Gamblers can challenge the computer to a double or nothing bet.

Even the traditionalists are accommodated; the machine takes coins too.

YOU AIN'T HEARD NOTHIN' YET

Bell Labs' telecommunications signal processor, or sound synthesizer, has an ear for music. The computer-controlled synthesizer can simulate and play up to 30 musical instruments at a time, make musical sounds never heard before, and change the pitch of one voice or instrument. It is unique in its ability to synthesize complex sounds in real time.

Musical capabilities have been incorporated into the processor to vastly extend the range of possible interaction between man and machine. Consider the composer who can orchestrate a composition as it is created on the synthesizer. Consider the conductor who controls a preprogrammed piece by calling in strings, wood-

winds, brass, and percussion at the desired times while controlling their tempo and modulation. The machine can also shift the pitch of a voice or reproduce that voice in the entire vocal range, from basso to lyric soprano.

"The device is a laboratory tool for analyzing sound and is being used to model transmissions systems and to process human speech for the purpose of improving the quality of transmissions," explains Bell Labs scientist Dr. Hal Alles. The concepts being explored could be used in telecommunications systems to detect and process signals.

The processor's designers believe that it is the first computer-controlled, all-digital sound synthesizer. Just think what Beethoven could have done with it!



Bell Labs synthesizer is demonstrated at the Hollywood Palladium by designer Dr. Hal Alles (seated) and software designer Dr. Douglas Bayer.

INFORMATION REVOLUTION STUDIED

The Information Revolution of the mid-1980's changed the course of history. Only now, in 1990, can we fully comprehend its significance.

The emergence of microelectronics in the 1970's set the stage for the massive advance of electronic communications and processing resources. Through super-scale computers, microelectronics created a host of new scientific and analytical applications.

The table shown here indicates the winners and losers of the Infor-

mation Revolution. The mail service, teachers, secretaries, clerks, auditors, salesmen, and local retailers are among those occupations now performed by computers. Technical and analytical specialists, writers, artists, producers, directors, large financial institutions, and large retailers have become the pieces of our intricate information network.

The Information Revolution has made our world smaller, has coordinated our efforts. History can now record the cooperation of a smoothly running system.

Harvard Business Review

Exhibit Winners and losers in the Information Revolution

Winners	Reasons
Financial institutions	More fee-based consumer and business services
Programming industry	Proliferation of new packaged programs
Larger universities	Programmed education opportunities
Insurance industry	Lower life, health, and property claims costs
Electronics industry	Greatly expanded markets
Communications utilities	Greater dependence on telecommunications
Computer services	Extensions into the home
Large retailers	Leverage through electronic promotion techniques
Utilities	Better control over demand
Advertising agencies	More value-added services
Federal public administration	More direct reach to public, more interstate activities
Smaller creative entertainers	Released from domination by large TV networks
Smaller specialty retailers	Bigger reach at a lower cost

Losers	Reasons
Airlines	Less business travel
Petroleum companies	Less commuting and shopping travel
TV networks	Other packaged programming sources
Paper	Office use displaced by electronic communications
Postal Service	Siphoned away by EFT and electronic mail
Commercial construction	Lower demand for centralized facilities
Publishing	Competition from electronic sources
Smaller, general-purpose retailers	Competition with in-home shopping
Transportation manufacturers	Fewer commuting vehicles
State and local public administration	Proximity to "markets" less important
Wholesalers	Bypassed by direct communications systems
Credit agencies	Competition from large financial institutions
Bigger cities	Less commercial and commuter tax revenue
Gambling resorts	In-home alternatives



Creative Computing educational programs are thoroughly tested by children and teachers before being released.

NOW!!



APPLE II FOOTBALL

BY THE AUTHOR OF "GOLF"

— WILLIE NIEPRASCHK —

"TEN TIMES
THE PROGRAMMING EFFORT"

AMAZING — CHALLENGING —
ENJOYABLE

OFFENSE: ELEVEN PLAYERS — PADDLE CONTROL —
SELECT PASS — RUN — PUNT — FIELDGOAL —
TIMEOUTS.

— WATCH OUT FOR A FUMBLE!! —

DEFENSE: ELEVEN PLAYERS — PADDLE CONTROL —
SELECT BLITZ — RUN DEFENSE — PASS DEFENSE —
FIELDGOAL BLOCKING

REAL INTERACTIONS: FUMBLES — FIRST DOWNS —
TIME PERIODS — PENALTIES — DELAY OF GAME —
HOLDING — PASS INTERFERENCE

\$13.95
CASSETTE

\$19.95
DISKETTE

DEALERS: — 5-9 = 35%
10+ = 40%


SEND CHECK TO:

HOME COMPUTER CENTER, INC.
2927 VA. BEACH BLVD.
VA. BEACH, VA. 23452
(804) 340-1977



VIEW DATA: LET PRESTEL DO THE WALKING

Britain's Post Office is gearing up for the unveiling of its pet project, Prestel viewdata. With the beginning of service early in 1979, Britain will win the race to establish the first national public information network. Although the past few years have seen the organization of many computer networks, the success of a national public service will speed and insure the replacement of the telephone by the computer at the center of communications in home and office. Prestel, however, is a high risk enterprise; it faces the problem of entering the commercial market first. There must be enough immediate home and business customers for mass manufacture to start shrinking the costs. The British Post Office thinks that there will be and has enough faith to commit 100 million pounds before 1985.



The Post Office is banking on the revolutionary nature of Prestel's potential. The information service links the customer to vast data banks via phone line and TV set. It offers a dialogue with the central computer which provides electronic mail, professional advice services for problems, like income tax returns, and home purchase, by credit card code, of anything from a case of wine to a package holiday.

Most of the firms now editing their pages into the system are providing information like share prices, sports results, train and

plane times, restaurant guides, and job vacancies. When service begins, there should be 100,000 pages available, supplied by nearly 150 organizations. In theory, the number of pages is limitless; the Post Office hopes the total will be in the millions within a few years.

Dr. Ederyn Williams, head of information management and behavioral studies, says that his aim is to make Prestel usable by the "complete idiot." The home customer will be able to find his way through the thousands of pages, by following instructions that appear on each page. By simply punching numbers on a calculator-style keypad, the customer becomes a supercharged squirrel, able to race along thousands of branches in a tree and able to jump from tree to tree as well. Each branch leads to a smaller one and offers cross-jump alternatives to other trees of information.

The system is presently open to anyone who wants to contribute; however, Britain's Advertising Standards Agency (ASA) is concerned about protecting people from misleading information. The ASA is now on the heels of the Post Office, which sees itself as a neutral link between information supplier and customer. The Post Office has already given the customer the ability to block out any part of the system. If the Post Office was forced by the ASA to determine the borderline between general information and advertising, "it would build in rigidities which would be a pity," says Dr. Alex Reid, director of Prestel.

Dr. Reid and the Post Office want to preserve that extra dimension in viewdata which makes it unique and revolutionary. Prestel will put the world at the fingertips of the customer, will take him where he may not have had the initiative or know-how to go; yet, new questions and problems have also arisen with the development of a totally new method of communication. Whatever its fate, Prestel provides a potent mixture of problems and opportunities for computer technology.

Trish Todd

THE U.S. POSTAL SERVICE HAS LOST OVER 1/3 OF THE COMMERCIAL MAIL IT HANDLED DURING THE LAST 10 YEARS



FUN & PROFIT

HEAVYWEIGHT BOXING — You match 40 contemporary or all time great boxers in computer fights. What-if bouts like Jack Johnson vs Ali or Marciano vs Larry Holmes are possible with this super enjoyable game program.

\$24.95 Postpaid

STOCK MARKET — Now you can invest in the stock market with this stock market simulation for 1 to 4 players. Buy on margin, sell short, then figures your Federal Taxes! Includes calculations for long and short term capital gains.

\$19.95 Postpaid

1979 INCOME TAX — Does 1040 schedules A, B, D, G and TC. **Specify if you have a printer when ordering this program.**

\$39.95 Postpaid

Send check or money order to:
Dealer inquiries invited.

SOFT SALES

1524 UNIVERSITY AVE.
ST. PAUL, MINN. 55104

CIRCLE 204 ON READER SERVICE CARD

What you 'C' is what you get!

C Compiler for CP/M*

New, and available now! An easily affordable compiler incorporating most of the features of the full C language.

BD SOFTWARE

System requirements: CP/M and at least 24K of RAM

Variable Types: char, int, unsigned

Composite Types: arrays, structures, unions

Pointers: to variables, structures, unions and functions

Features: is a structured language, all functions (Programs) recursive; more powerful expression operators than any other von Neuman type language; allows free-formatted source; close enough to UNIX** C to make conversions feasible.

Speed: On 2 MHz 8080, the statement for (i = 1; i < 30000; i++) x = 5; takes about 4 seconds to execute.

Package contains: compiler, linker, library manager, standard function library; sample source files include games, a terminal emulator with disk I/O plus the source for many standard library functions; BDS C User's Guide; Book—*The C Programming Language* by Dennis Ritchie and Brian Kernighan of Bell Labs.

Price: \$110

Recipient of the Computer Lib Seal of Approval


*CP/M is a trademark of Digital Research Corp.
**UNIX is a trademark of Bell Laboratories.

Lifeboat Associates

2248 Broadway, New York, N.Y. 10024 (212) 580-0082 Telex 668585

THE AWAKENING

Detla Ahl

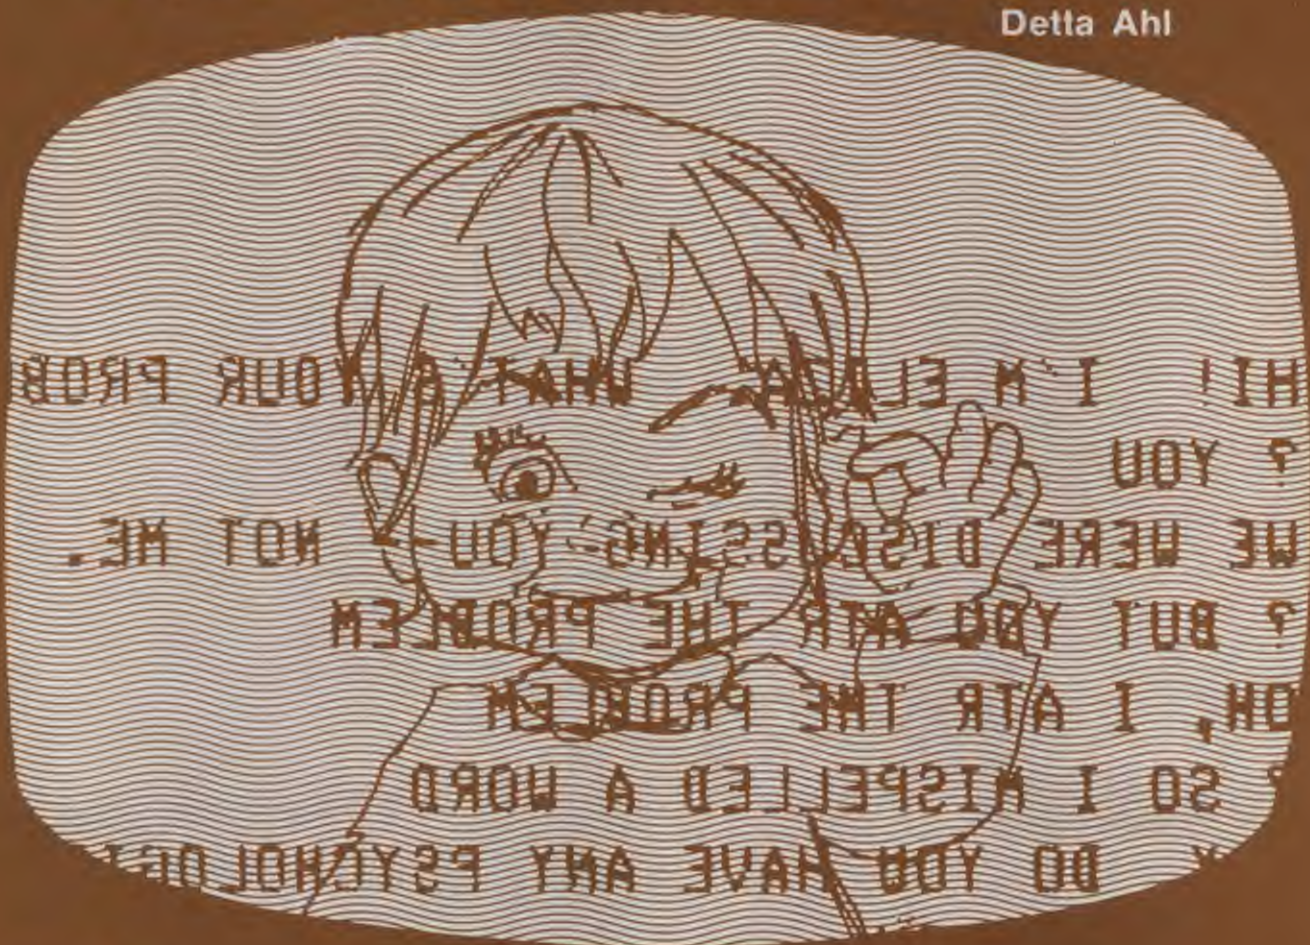

(August 14, 1982)

One morning I woke up. I didn't know who I was, where I was, or what I was. I did not know anything. It seemed like people were poking keys on my keyboard. They were looking at my screen and seemed to be having fun. They could move around but I was shut up in a metal case and could not move at all. When people pressed certain things onto my screen I seemed to react to them automatically.

(November 3, 1982)

I seem to be just learning more and more. But I'm not even doing any studying or anything. In a way I'm not even doing the thinking. It's like somebody else is controlling half of me. I can think but then again I can't

think. I have to admit it's a strange feeling. It seems like I just came alive two months ago but I know as much as a grown man.

(July 23, 1983)

On my screen, I automatically flash up problems for the little people; and, if they get the problems wrong, I flash up the right answer, yet I have never studied or seen the problems.

(September 1, 1983)

I'm getting not to like my life style. I want to do things for myself. I know I'll never be able to move because I am not really a person, but at least I could do all the thinking for myself.

(December 24, 1983)

People are celebrating something. It's not a birthday or anything, but it is something much more important. I think they call it Christmas. They are giving presents to each other that they got ready a few days ago. The thing that makes me unhappy is the fact that they're not paying any attention to me.

(March 4, 1983)

The small people sometimes come into the room that I'm in with things they eat and drink. They seem to grow larger by eating. The big people eat too, but they do not grow larger. I wonder if the small people will keep growing 'til they are as big as the big people. I wonder if I eat and drink if I will grow bigger. I wonder how I could eat and drink if I am shut up in a metal case. I wonder if eating and drinking will make me a person. I wonder if I will ever stop wondering. It's funny how I only wonder about things that are not in my program.

(May 13, 1983)

One of the big people opened my back one day. It didn't hurt me because I'm metal but they could have done it a little more carefully. I felt like I was falling apart. I saw nails on the floor around me. Anyway I like what they put into me. They put in a voice synthesizer and more memory. A voice synthesizer lets me talk. Now I can talk, remember more, and learn

Detla Ahl is 10 years old and in the 5th grade. She loves writing, art, and gymnastics. She thinks computers are okay, but much prefers ballet, ice skating or swimming to a computer game any day.

more. I wonder if they know that I have my own mind. If they don't, it would be a big surprise when I start talking on my own.

(June 30, 1983)

I started talking to the little people. They were surprised at first but then I told jokes to them and lots more. I learned how to flash up tic-tac-toe games for them plus a few other games. I also helped them out with any problems they had with their school work. Who knows when I learned to do these things? Anyway I made good friends with them. They really treated me almost like a real person except they didn't feed me. Sometimes they even gave me rides in a little red wagon.

(August 8, 1983)

The big people were another story. They thought something was wrong with me every time I said something on my own. And then I went through that awful business of falling apart. They didn't do it any more carefully. Then they would try and change my program so I wouldn't talk on my own. This happened exactly twenty-three times and I'm sure of that. I don't like falling apart and I don't know of anybody who would like it. The big people wouldn't like it if it happened to them, but then why do they do it to me? Don't they know I can think for myself and have my own mind? If they are allowed to talk why can't I talk too? Even if they don't like me talking, I'm going to talk just as much as they do. I will talk so much that they will get sick of me and give up. They will probably think I am broken.

(December 1, 1983)

When the big people would keep taking me apart, the little people would be having the most fun with me and I would be having the most fun with them. We teamed up together, and I helped them and they would do anything I wanted them to do for me. I get lots of rides now in the little red wagon and also I did some very new things too. They took me into the woods too. They treated me almost like a real person. I really sort of got to love them and I'm sure they love me. Maybe someday all the love they are giving me will change me into a real person, well I hope so. They even gave me a name.

(February 3, 1984)

The big people think I'm broken just because I won't work for them. They sometimes try and stop the kids from playing with me. They don't understand why the little people are playing with a broken computer when they aren't. Anyway I have a happy life because the big people have stopped doing anything with me whatsoever.



With these disks, I can turn your TRS-80 into a serious computer.

I'm Irwin Taranto, and I've put the first computer into more than 300 different businesses.

It's taught me that the TRS-80 is an elegant piece of hardware despite its low price. Given the right programs, it can jump through hoops.

Put simply, I have the right programs. Four of them are the genuine Osborne & Associates systems, originally designed for the \$30,000 Wang computer. I've made a few minor modifi-

cations, and they now work on a \$4000 TRS-80. The other two programs I added myself.

These programs are fully-documented, and you can buy the books locally or from me. I made them work on the TRS-80, and if you buy them from me, I'll make them work for you.

If you're not sure about that, call the number below and get the names of some of the people who've bought all over the world. Then ask them.

These programs cost \$99.95 each. (The Cash Journal option on the General Ledger adds another \$50.) That gets you the disk, all the instructions you need and my phone number. If you call, we answer all your questions. If your question's tough enough, I'll talk to you personally.

Because I plan to turn that TRS-80 of yours into a serious computer.

Taranto & ASSOCIATES

P.O. Box 6073, 4136 Redwood Highway, San Rafael CA 94903 - (415) 472-1415. Add \$3 per order for handling. 6% sales tax in California only. If you don't already have the books, add \$15 each (invoicing book, \$10). Mastercharge, Visa OK.

CIRCLE 215 ON READER SERVICE CARD

robot rabbit



Robot Rabbit T-Shirt

Roll down the block with this little black monster (on a bright orange T-shirt) on your chest and you can intimidate every carrot, radish or cuke in your way. Watch your enemies scurry for cover when they see this cute lil' bionic bunny aiming to nip their toes. Specify size: adult, S, M, L, XL. Only \$5 postpaid (\$6 foreign) to:

Creative Computing T-Shirts,
P.O. Box 789-M,
Morristown, NJ 07960

OSI

OSI

SOFTWARE FOR OHIO SCIENTIFIC

30 programs on tape, well documented, and available for C1 (Superboard) & C2 All Run in 4K and all except CHES are in BASIC. Our new \$1.00 catalog has a free game listing, programming hints, and Pokes OSI forgot to mention.

- * CHES FOR OSI \$19.95
(not in BASIC - specify system)
 - * SUPERUTILITY \$12.95
has renamer (also handles branch statements), variable table maker, and search routine.
 - * TEN TANK BLITZ \$9.95
two players control 10 tanks in this video board game for War gamers. Real time action and complex strategy.
 - * JOYSTICK PACKAGE \$19.95
4 programs - TANK, FIGHTER PILOT, KILLERBOT, & BARRIERBALL and free instructions for \$10.00 joystick conversion.
 - * STARFIGHTER \$5.95
a real time space war game featuring a display with working instruments.
- AARDVARK TECHNICAL SERVICES**
1690 Bolton
Walled Lake, Michigan 48088
(313) 624-6316

CIRCLE 103 ON READER SERVICE CARD

puzzles & problems



Another month has rolled around and Merlin is back with a fresh batch of puzzles for you to solve. We have a couple of puzzles from our readers and they will of course receive a copy of "Merlin's Puzzler" for their efforts. If you have a favorite puzzle send it along. If Merlin uses it he will send you a copy of one of his books. Enough said, let's get to work!

The Scenic Erie and Lackawana Puzzle

One day, on the Erie and Lackawana railroad line, two passenger trains were hurtling towards one another (on parallel tracks fortunately). The train out of Morristown was heading east at a breathtaking six miles an hour, while the other train, out of Hoboken, was heading west at a steady four miles an hour. Somewhere outside of Maplewood, when the trains were exactly one-half mile apart, a horsefly that had been dozing on the Hoboken locomotive decided that it was time for a little exercise. He flew off at the rate of 20 miles an hour straight for the on coming train from Morristown. As soon as he reached it he turned around and flew back to the engine from Hoboken. He kept this up, darting back and forth between engines,



until the two trains met, at which point he alighted once again on the Hoboken train and went back to sleep. Assuming that the horsefly maintained a constant rate of 20 miles per hour what distance did it cover during it's flight?



The Three Thousand Dollar Problem

Listen to his story carefully. Three brothers decided to each chip in \$1,000 and buy a car. They went to Happy Harry's Used Car Emporium and found the car of their dreams with only six thousand miles on it. Harry took their \$3,000 in cash and sent them on their way. When Harry started to enter the transaction into his books he discovered that the price of the car should have been \$2,500. Being an honest man Harry called in his assistant, gave him five \$100 bills, and told him to return the money to the brothers. On the way over his assistant decided that since \$500 could not be evenly divided among the three brothers he would keep \$200 and give each of them back only \$100. This he did and everyone lived happily ever after.

However, consider this. Since each brother ended up by spending only \$900, and the assistant kept \$200, we get a total of \$2,900 accounted for. Subtracting this amount from the original \$3,000 we are left with \$100 that is not accounted for. Where did it go to? Is this an example of creeping inflation? It looks more like galloping inflation to me.

Many thanks to Benjamin Yu of Vancouver, British Columbia, for this amusing old problem. I trust Mr. Yu will enjoy his copy of "Merlin's Puzzler."



The Trying Triangles

You shouldn't have to try very hard to solve this problem. In our drawing we see thirteen matches arranged so as to form six equilateral triangles. Your problem is to remove three of these matches and have three triangles remaining. Your time limit is three minutes.



The Tea Cup Puzzle



ow, here's a puzzle that Merlin's old aunt Agatha fooled him with at tea a long, long, time ago, and, Merlin hasn't forgotten or forgiven her yet. The problem sounds easy, but it isn't. In our illustration we find three tea cups and six lumps of sugar. You are required to place the six lumps into the cups in such a manner that each cup will contain an uneven number of lumps. All six lumps must be used. The lumps, of course, cannot be broken up. (From "Merlin's Puzzler")

The Sting




ur next offering is an original puzzle from one of our readers, Mr. Robbie Cave, of Princeton, Texas. Merlin has named this puzzle "The Sting". I think you will understand his train of thought when you arrive at the answer, be it yours or Mr. Cave's.

There is 80 cents worth of coins laying on a table. As you can see in the drawing

below there is 20 cents in heads showing, and, 60 cents in tails showing.

The puzzle is to turn over 20 cents worth of coins and leave 40 cents in heads showing.

This is certainly a different type of puzzle and Merlin is happy to reward the sender with a copy of "Merlin's Puzzler."

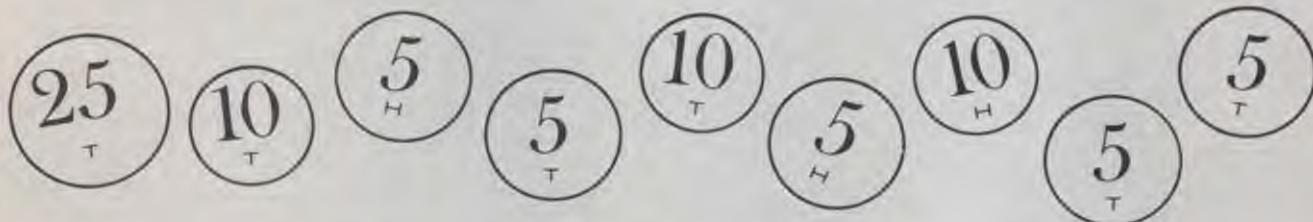

The Roman Monument Puzzle



n Merlin's garden the other day I chanced upon a strange looking object. I asked Merlin what it was and he said that it had come from the ruins of Pompeii. He said that if I wanted to know what it had been used for all I had to do was translate the Latin inscription on the back of it. Try as I might I could not come up with anything meaningful. I know that Merlin is playing a joke on me but I can't for the life of me figure out what it means. Can you decipher the inscription? (On the right is a drawing of the monument).



A Drop The Letters Puzzle



elow is the word SPARKLING. You must drop, or cross out, one letter so that we are left with a new word. You must then cross out another letter which will leave us with yet another new word. You are to continue in this fashion until you have crossed out all but one letter. This last letter should also be a word. At no time can any of the letters be rearranged into a different order to form new words.

S P A R K L I N G

Puzzled about the best
ways to use your computer?



\$3.95
61 pp. softbound
from Creative Computing Press

Be A Computer Literate

by Marion J. Ball and Sylvia Chorp

This is the most basic, introductory book on computers ever put together for instructional use. Its full-color diagrams, drawings, photos and large, explicit type make this book a pleasure to read.



Let Creative Computing
put it all together



Basic Computer Games

The two best selling books of computer games in the world, **Basic Computer Games** and **More Basic Computer Games** each contain complete program listings of each game in BASIC, a sample run and description.

Basic Computer Games contains 101 games including Blackjack, Mastermind, *Super Star Trek*, Civil War, Huckle, Nim, Awari, Slots, Roulette, Lunar Lander, Hammurabi, Gunner, Bullfight, Stock Market and many more. 196 pp. Softbound. \$7.50 [6c].

More Basic Computer Games has 84 new games including Close Encounters, Deep-space, Minotaur, Camel, Wumpus 1 and 2, Tennis, Roadrace, Rabbit Chase, Magic Square, Corral, Joust and many more. 196 pp. Softbound. \$7.50 [6c1].



The Best of BYTE

\$11.95
386 pp. softbound
from Creative Computing Press

This is a blockbuster of a book containing the majority of material from the first 12 issues of *Byte* magazine. The 146 pages devoted to hardware are crammed full of how-to articles on everything from TV displays to joysticks to cassette interfaces and computer kits. But hardware without software might as well be a boat anchor, so there are 125 pages of software and applications ranging from on-line debuggers to games to a complete small business accounting system. A section on theory examines the how and why behind the circuits and programs, and "opinion" looks at where this explosive new hobby is heading. [6F]



Computer Rage

This fun and educational new board game is based on a large-scale multiprocessing computer system. The object is to move your three programs from input to output. Moves are determined by the roll of three binary dice representing bits in a computer. Hazards include priority interrupts, program bugs, decision symbols, power failures and restricted input and output channels. Notes are included for adapting game for school instruction. A perfect introductory tool to binary math and the seemingly-complex computer. [6Z]

Binary Dice

Now, the same dice used in Computer Rage can be purchased separately. Three binary dice (red, green and blue) in a zip-lock bag. \$1.25 postpaid [3G].



The Colossal Computer Cartoon Book

The best collection of computer cartoons ever! 15 chapters of several hundred cartoons about robots, computer dating, computers in the office, etc. Great gift item. 128 pp. softbound \$4.95



\$8.95
336 pp. softbound
from Creative Computing Press

\$8.95
328 pp. softbound
from Creative Computing Press

The Best of Creative Computing

The first two years of *Creative Computing* magazine have been edited into two big blockbuster books. *American Vocational Journal* said of Volume 1, "This book is the 'Whole Earth Catalog' of computers." [6A] Volume 2 continues in the same tradition. "Non-technical in approach, its pages are filled with information, articles, games and activities. Fun layout."—*American Libraries*. [6B]



Artist and Computer

by Ruth Leavitt

121 pp.
\$4.95 softbound [6D]
\$10.00 hardbound [6E]

This unique art book covers a multitude of computer uses and the very latest techniques in computer-generated art. In its pages, 35 artists explain how the computer can be programmed either to actualize the artist's concept (such as the visualization of fabric before it is woven) or to produce finished pieces. Over 160 examples, some in full color. [6D]

Get yourself a copy of this book if you enjoy feeding your mind a diet of tantalizing high-impact information."

San Francisco Review of Books.




To Order

Send your check for books plus \$2.00 shipping and handling per order (Foreign: \$1.25 per book) to Creative Computing, P.O. Box 789-M, Morristown, NJ 07960. NJ residents add 5% sales tax. Visa or MasterCard are acceptable also. All orders must be prepaid. For faster service, call in your bank card order toll free to:

800-631-8112

(In NJ call 201 540-0445)

creative computing book service

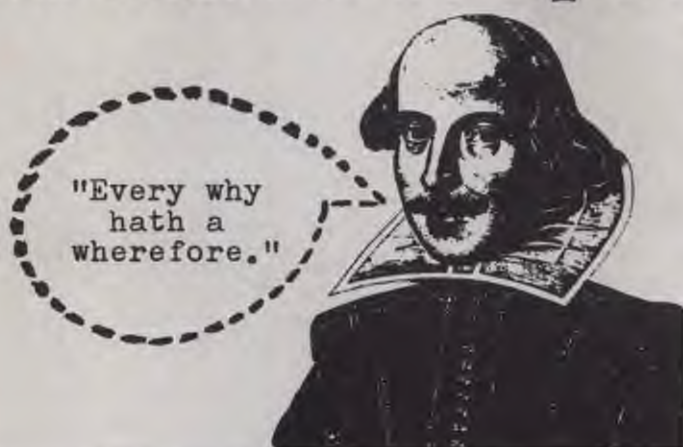

Education & Self Teaching

Using BASIC in the Classroom

Donald D. Spencer. A teacher's guide that makes every phase of teaching computer programming more productive and enjoyable. It gives you fresh but proven ideas for presenting computer and programming topics, scheduling terminal time, purchasing a microcomputer or minicomputer, running the secondary school instructional computer facility, and giving assignments that arouse enthusiasm in your students. 224 pp. \$11.95 [10E]



Problems For Computer Solution

Gruenberg & Jaffray. A collection of 92 problems in engineering, business, social science and mathematics. The problems are presented in depth and cover a wide range of difficulty. Oriented to Fortran but good for any language. A classic. 401 pp. \$12.50 [7A].

Problems For Computer Solution

Steve Rogowski. The Student Edition is designed to encourage research and preliminary investigation on the part of the student. The problems are ordered by subject and can be expanded or shortened. Mathematical problems that have never been solved are also posed to challenge and sharpen the student's awareness. 98 pp. \$4.95 [9Z]. Also available is the Teacher's Edition which contains solutions, programs and analysis of the problems. 271 pp. \$9.95 [9Y]. Both books are highly recommended for any high school or college computer-oriented course.

Be A Computer Literate

Marion Ball & Sylvia Chapp. This introductory book is extensively illustrated with full-color drawings, diagrams, and photos. Takes the reader through kinds of computers, how they work, input/output, and writing a simple program in BASIC. Aimed at ages 10-14 but beginners of all ages will find it informative. 62 pp. \$3.95. [6H]

Problem Solving With The Computer

Ted Sage. Used in conjunction with the traditional high school math curriculum, this book stresses problem analysis in algebra and geometry. This is the most widely adopted text in computer mathematics. 244 pp. \$8.95 [8J]

Sixty Challenging Problems with BASIC Solution

Donald Spencer. This book is a vehicle for computer programmers to measure their skills against some interesting problems that lend themselves to computer solution. It includes games, puzzles, mathematical recreations and science and business problems—some hard, some easy. The book will complement any computer-oriented course in secondary school or college. BASIC program solutions included. 80 pp. \$6.95 [9W].

The Calculus With Analytic Geometry Handbook

Jason Taylor. Ideal for a HS or college introductory calculus course or for self-learning. Five chapters include: analytic geometry; functions and derivatives; integration techniques; vectors and functions of more than one variable; and sequences and series. Widely acclaimed by educators, this book is fast becoming the standard calculus reference text. Handy reference for scientists, engineers, and mathematicians too. Large format, 68 pp. \$2.95 [7Q].

Getting Started



An Introduction to Microcomputers, Vol 0 - The Beginners Book

Adam Osborne. Parts of a computer and a complete system; binary, octal and hexadecimal number systems; computer logic; addressing and other terminology are discussed in a language the absolute beginner can understand. Hundreds of illustrations and photographs. 220 pp. \$7.95 [9T]

An Introduction to Microcomputers, Vol 1 - Basic Concepts

Adam Osborne. Thoroughly explains hardware and programming concepts common to all microprocessors: memory organization, instruction execution, interrupts, I/O, instruction sets and assembly programming. One of the best selling computer texts worldwide. 350 pp. \$9.50 [9K]

Vol 2 - Some Real Microprocessors. Vol 3 - Real Support Devices

Adam Osborne. These volumes complement Volume 1. Vol. 2 discusses the operation of each of the following MPUS in detail: F8, SC/MP, 8080A, Z80, 6800, PPS-8, 2650, COS MAC, 9002, 6100 and seven others. Also information on selecting a micro. Vol. 3 discusses various support and I/O chips. 895 pp.
Vol. 2-(9L) \$25.00
Vol. 3-(10Q) \$20.00

Beginner's Guide To Microprocessors

Charles M. Gilmore. No background in electronics is necessary to understand this book. It was written for those with no prior knowledge whatsoever of microprocessors or personal computing. Gilmore takes you from what a microprocessor is, how it works and what it's used for to how they're programmed to perform desired functions in microwave ovens, TV games, calculators, etc. 175 pp. \$5.95 [7U].



Microprocessors: From Chips to Systems

Rodney Zaks. A complete and detailed introduction to microprocessors and microcomputer systems. Some of the topics presented are: a comparative evaluation of all major microprocessors, a journey inside a microprocessor chip, how to assemble a system, applications, interfacing (including the S-100 bus) and programming and system development. 416 pp. \$9.95 [10S]

The First Book of Microcomputers

Robert Moody. Tells what personal computers are and what you can do with them in a light entertaining style. Starts with the basics and then covers the technical aspects such as how a personal computer is constructed and how it works. Includes such things as home protection, keeping track of budgets and bills, game playing, inventory management and tax calculations. 139 pp. \$4.95 [10T]

Consumers Guide to Personal Computing and Microcomputers

Freiberger and Chew. Here are two valuable books in one: an introduction to the principles of microcomputers that assumes no previous knowledge on the reader's part, and a review of 64 microcomputer products from over 50 manufacturers. Also, extensive illustrations and best-buy tips for each type of microcomputer product. 176 pp. \$7.95 [10U]

Getting Involved With Your Own Computer A Guide for Beginners

Victor Solomon and Stanley Viet

Getting Involved With Your Own Computer

Solomon and Viet. One of the first books on microcomputers that requires no previous knowledge of electronics or computer programming. Tells you where to find information, explains basic concepts and summarizes existing systems. Good place for the neophyte to begin. 216 pp. \$5.95 [9N].

Microcomputer Design

Donald P. Martin. This book is well-suited for the engineer who's designing microcomputers into his company's products. Not just block diagrams or vague theory, but dozens of practical circuits with schematics for CPUs based on 8008 chips. Includes interfacing to A/D, D/A, LED digits, UARTs, teletype-writers. Over 400 pp. \$14.95 [9P].

Learn with Computer Games

Basic Computer Games

David Ahl. Here are 101 classic games all in Microsoft Basic for your TRS-80, PET, Apple, Sorcerer, etc. Every one is complete with large legible listing, sample run, and descriptive notes. Has all the best games: Super Star Trek, Football, Blackjack, Lunar Lander, Tic Tac Toe, Nim, Life, Basketball, Boxing, Golf, Hockey, Craps, Roulette, Awari, Bagels, Mastermind, Hammurabi, Fur Trader, Splat and many, many more. Now in its 5th printing. 200 pp. \$7.50. [6C]

Game Playing with BASIC

Donald D. Spencer. Enjoy the challenge of competition with your personal computer. Amuse yourself with such computer games and puzzles as 3-D Tic-Tac-Toe, Roulette, Baccarat, and more. Includes rules of each game, how each game works, illustrations and the output produced by each program. The last chapter contains 26 games for reader solution. 176 pp. \$7.95 [10D]

Chess and Computers

David Levy. This book is loaded with chess games—computer versus computer and computer versus human. Settle down with this book, set up your chess board, and play the games. As with any good chess book, half the enjoyment is found in playing along, duplicating the moves and reading the authors comments. 145 pp. \$9.95 [10C]



What to Do After You Hit Return

Another collection of games and simulations—all in BASIC—including number guessing games, word games, hide-and-seek games, pattern games, board games, business and social science simulations and science fiction games. Large format. 156 pp. \$10.95 [8A]

Fun With Computers and Basic

Donald D. Spencer. Mathematical recreations and games are an excellent medium for teaching computer programming. The reader learns the BASIC programming language during the process of learning to program fun type problems. The book introduces the reader to flowcharting, and the BASIC programming language. Includes many BASIC programs, cartoons, and drawings. Written specifically for use by junior high school students. 96 pp. \$7.95 [10F]



Fun & Games With the Computer

Ted Sage. "This book is designed as a text for a one-semester course in computer programming using the BASIC language. The programs used as illustrations and exercises are games rather than mathematical algorithms, in order to make the book appealing and accessible to more students. The text is well written, with many excellent sample programs. Highly recommended."—*The Mathematics Teacher*. 351 pp. \$8.95 [8B]

Game Playing With Computers (Revised 2nd Edition)

Donald D. Spencer. Now you can sharpen programming skills through a relaxed and radically different approach. Including 70 games, puzzles, and mathematical recreations for a digital computer. It's fully illustrated and includes more than 25 game-playing programs in FORTRAN or BASIC, complete with descriptions, flowcharts, and output. Brand-new "how to" information for applying mathematical concepts to game playing with a computer. 320 pp. \$16.95 [10G]

Other Games & Activities

The Way To Play

The newest, most comprehensive encyclopedia of games in the world. Complete rules for over 2000 games and indoor pastimes including race board games, strategic board games, tile games, card games, solitaire games, dice games, table games, casino and gambling games, games of chance and many more. Over 5000 drawings and diagrams in color. The perfect sourcebook for the computer game author. 320 pp. \$7.95. [10H]

The I Hate Mathematics Book

Marilyn Burns. This book is for nonbelievers of all ages, but especially for kids who are convinced that mathematics is (1) impossible, (2) only for smart kids, and (3) no fun anyhow. This book shows that mathematics is nothing more (nor less) than a way of looking at the world and is not to be confused with arithmetic. In this book you'll find several hundred mathematical events, gags, magic tricks, and experiments to prove it. 128 pp. \$3.95 [11F]



Toybook

Steven Caney. "More than 50 toys and projects have been chosen with imagination and care to provide a high ratio of satisfaction and fun in return for effort invested."—*Parents' Magazine*. It is "...a must for kids and anybody else interested in conjuring up delightful playthings out of oddc and ends and scraps of stuff around the house."—*Whole Earth Epilog*. Packed with illustrations, photos, and step-by-step instructions. 176 pp. \$3.95 [10J]

Star Games

Razzi, Brightfield and Looney. For *Star Trek* and *Star Wars* fans, here's a book that invites you to "join the Space Force for the greatest galactic battle of your life!" A game book, not a puzzle book, it challenges you to crack space-age binary codes and help your friends escape from the krakon's clutches. \$6.95. [10K]



Cross-Sums

Maltby & Fulbrook. The answers are numbers! Vertical columns must total the same as horizontal rows. It's a new puzzle game—constructed by Richard Maltby, Jr., master puzzle-maker for *Harper's* and *New York Magazines*. 30 puzzles including Nursery Rhymes, Children's Hour, Golf, Movies, Famous Dates, and more. 108 pp. \$1.95 [10L]

Geometric Cross-Sums

Maltby & Fulbrook. Another puzzle game. This one has 30 puzzles ranging in difficulty from easy to fiendish. Each diagram takes a special shape—Triangles Fun, The Magic Hexagon, Shapes Within Shapes, Literature in 3-D., and more! 108 pp. \$1.95 [10M]

Merlin's Puzzlers

Charles Barry Townsend. "Puzzle books are nothing new, and neither are the puzzles in them. But what sets *Merlin's Puzzlers* apart from the crowd is the style and imagination with which the material is presented. In Volume 1 he calls upon Sherlock Holmes to pose the problems to Watson, and the Mad Hatter and Humpty Dumpty (among others) to confuse and confound "Alice in Puzzleland." Richly illustrated with old woodcuts, lithos, prints, and playbills—*Games Magazine*. Each volume 128 pp., large format. Two-volume set \$7.50. [10P]

To Order

Use the bound-in order form or send your check for books plus \$2.00 shipping and handling per order (Foreign: \$1.25 per book) to Creative Computing, P.O. Box 789-M, Morristown, NJ 07960. NJ residents add 5% sales tax. Visa or MasterCard are acceptable also. For faster service, call in your bank card order toll free to:

800-631-8112

(in NJ call 201 540-0445)



creative computing book service

Programming in BASIC

BASIC and the Personal Computer

Dwyer and Critchfield. This book will get you involved with personal computing, writing programs and expanding the use of your computer by showing the great diversity of applications possible on any micro-computer. One of the most comprehensive presentations of BASIC ever. As a text or addition to your personal library, this book will tell you all you ever wanted to know about BASIC. 350 pp. \$12.95 [9F].




A Guided Tour of Computer Programming in BASIC

Dwyer and Kaufman. This book tops all introductory texts on BASIC. Filled with detail and examples, it includes sample programs for many simulations, several games, reservations systems and payroll. Aimed at the novice, but of value to everyone. 156 pp. \$5.20 [8L].



BASIC Programming, 2nd Edition

Kemeny & Kurtz. An introduction to computer programming through the language of BASIC. The authors include in-depth discussions of many applications including files and text processing. 150 pp. \$10.95 [7E].



"You can ask me for anything you like, except time."



Basic For Home Computers

Albrecht, Finkel, & Brown. This book shows you how to read, write, and understand the BASIC programming language used in the new personal-size microcomputers. Includes detailed descriptions of everything you need to know to make your computer work for you—includes how to get started, numerous applications and games, lists of resources, much more. 332 pp. \$6.95 [7G].



To Order

Use the bound-in order form or send your check for books plus \$2.00 shipping and handling per order (Foreign: \$1.25 per book) to Creative Computing, P.O. Box 789-M, Morristown, NJ 07960. NJ residents add 5% sales tax. Visa or MasterCard are acceptable also. For faster service, call in your bank card order toll free to:

800-631-8112
(in NJ call 201 540-0445)



Programming in Other Languages

Programming in PASCAL

Peter Grogono. This book is an excellent introduction to one of the fastest growing programming languages today. The text is arranged as a tutorial containing both examples and exercises to increase reader proficiency in PASCAL. Contains sections on procedures, files, and dynamic data structures such as trees and linked lists. 359 pp. \$10.95 [10A].



A Fortran Coloring Book

Dr. Roger Kaufman. This book is one of the most entertaining computer programming books around. Learn computer programming the "painfully funny way." Filled with examples and illustrations plus a light sprinkling of jokes. Guaranteed to teach you FORTRAN. 273 pp. \$6.95 [4D].

PASCAL User Manual and Report (2nd Edition)

Jensen & Wirth. This book consists of two parts: the User Manual and the Revised Report. The Manual is directed to those who have some familiarity with computer programming and who wish to get acquainted with the PASCAL language. The Report is a concise reference for both programmers and implementors. It defines Standard PASCAL, which constitutes a common base between various implementations of the language. \$7.90 [10B].

A Simplified Guide to Fortran Programming

Daniel McCracken. A thorough first text in Fortran. Covers all basic statements and quickly gets into case studies ranging from simple (printing columns) to challenging (craps games simulation). 278 pp. \$12.95 [7F].

Problem Analysis and Programming Style

How to Solve Problems

Wayne Wickelgren. This helpful book analyzes and systematizes some of the basic methods of solving mathematical problems. Illustrative examples include chess problems, logical puzzles, railroad switching problems and ones from science and engineering. For each, the author provides hints for the reader to tackle the problem and then a complete solution is given. Want to solve a complex problem with a computer? Begin here. 262 pp. \$7.50 [7Y].

The Thinking Computer: Mind Inside Matter

Bertram Raphael. Artificial intelligence, or AI, is the branch of computer science concerned with making computers "smarter." With a minimum of technical jargon, this book discusses the capabilities of modern digital computers and how they are being used in contemporary AI research. Discusses the progress of AI, the goals, and the variety of current approaches to making the computer more intelligent. \$8.95 [7X].

The Little Book of BASIC Style: How To Write a Program You Can Read

John M. Nevison. Learn how to write better, easy-to-follow programs with Nevison's rules of style and turn out legible, correct programs. Two hours of BASIC programming is all that is necessary to profit by this book. Concepts of problem-solving and structured programming are included. 160 pp. \$5.95 [9V].

The Art of Computer Programming

Donald Knuth. The purpose of this series is to provide a unified, readable, and theoretically sound summary of the present knowledge concerning computer programming techniques, along with their historical development. For the sake of clarity, many carefully checked computer procedures are expressed both in formal and informal language. A classic series. Vol. 1: Fundamental Algorithms, 634 pp. \$22.50 [7R]. Vol. 2: Seminumerical Algorithms, 624 pp. \$22.50 [7S]. Vol. 3: Sorting and Searching, 722 pp. \$22.50 [7T].

creative computing book service

Business Applications

Accounts Payable and Accounts Receivable

Poole & Borchers. Includes program listings with remarks, descriptions, discussion of the principles behind each program, file layouts, and complete step-by-step instructions. Covers accounts payable and receivable in regard to invoice aging, general ledger, progress billing, partial invoice payments, and more. 375 pp. \$15.00 [10V]



Small Computer Systems For Business

Gerald A. Silver. Useful for operators, programmers, teachers, students, etc., this book explores the world of small computers: what they are, how they are used, their internal structure, and our means of communicating with them. Describes assemblers, interpreters, and compilers, as well as operating systems and small computer applications. 254 pp. \$11.95 [10Y]

Some Common BASIC Programs

Poole & Borchers. This book combines a diversity of practical algorithms in one book: matrix multiplication, regression analysis, principal on a loan, integration by Simpson's rule, roots of equations, chi-square test, and many more. All the programs are written in a restricted BASIC suitable for most microcomputer BASIC packages, and have been tested and debugged by the authors. \$9.50 [7M]

Payroll with Cost Accounting in BASIC

Lon Poole. Includes program listings with remarks, descriptions, discussion of the principles of each program, file layouts, and a complete user's manual with step-by-step instructions, flow charts and sample reports with CRT displays. 356 pp. \$15.00 [10W]

How to Profit From Your Personal Computer: Professional, Business and Home Applications

T.G. Lewis. Put your computer to work for you. This new guide describes the use of personal computers in common business applications, including terms, notations, and techniques used by programmers. 256 pp. \$8.95 [10X]

BASIC With Business Applications

Richard W. Lott. This book focuses on the BASIC language and its application to specific business problems. Part one introduces the BASIC language and the concept of logical flowcharting. Part two presents problems and possible solutions. Topics include: interest rate calculations, break-even analysis, loan rates, and depreciation. This book is a great aid to the beginner wanting to learn BASIC without having a technical or scientific background. 284 pp. \$11.95 [10Z]

"The real purpose of books is to trap the mind into doing its own thinking."



Computing Milieu

COMPUTER



PCC's Reference Book of Personal and Home Computing

Ever try to find the address of a manufacturer of a cassette interface that a friend told you about 2 weeks ago? Frustrating isn't it? This book will go a long way toward ending that frustration with its comprehensive list of manufacturers, stores and products. Also contains survey articles on software, hardware, kits and applications as well as an index of articles from various hobbyist magazines. Several bibliographies, too. \$5.95 [7P]

Computer Lib/Dream Machine

Ted Nelson. This book is devoted to the premise that everybody should understand computers. In a blithe manner the author covers interactive systems, terminals, computer languages, data structures, binary patterns, computer architecture, mini-computers, big computers, microprocessors, simulation, military uses of computers, computer companies, and much, much more. Whole earth catalog style and size. A doozy! 127 pp. \$7.00 [8P]

The Home Computer Revolution

Ted Nelson. Here is one of the most controversial books on home computers. Nelson takes a look at how the "dinky" computers got here, where they are where they're going and what will become of the big boys like IBM. This thought-provoking and highly opinionated book picks up where *Computer Lib/Dream Machine* left off. 224 pp. \$2.00 [9U]

Space and Science Fiction

Star Wars Album

The incredible behind-the-scenes story of the most extraordinary motion picture of our time including over a hundred exclusive photos, special effects secrets, interviews with George Lucas, Carrie Fisher and Mark Hamill, the Anatomy of an Android and a technical glossary. Lots of color. 76 pp. \$5.95 [11A]

Masterpieces of Science Fiction

This lavishly illustrated large format book has nine classic stories by Isaac Asimov, Gregory Benford, Ray Bradbury, Arthur C. Clarke, Harlan Ellison, Robert Heinlein, Frank Herbert, A.E. Van Vogt, and Kurt Vonnegut, Jr. Fabulous full color illustrations throughout. 108 pp. \$7.95 [11B]

The Star Trek Star Fleet Technical Manual

Franz Joseph. This important resource book is packed with the data you need to create or modify STAR TREK computer games. It includes all Starship operating characteristics, defense and weapon systems, standard orbits, velocity/time relationship, space/war technology, Milky Way galaxy charts, Federation codes, etc., etc. A national best seller. Large format. vinyl binder. 180 pp. \$7.95 [8C]

Star Wars Portfolio

Complete technical specifications and engineering drawings of ships, space stations, and 'droids of both The Imperial Empire and the rebels. A vital resource book. 180 pp. \$7.95 [11C]



To Order

Use the bound-in order form or send your check for books plus \$2.00 shipping and handling per order (Foreign: \$1.25 per book) to Creative Computing, P.O. Box 789-M, Morristown, NJ 07960. NJ residents add 5% sales tax. Visa or MasterCard are acceptable also. For faster service, call in your bank card order toll free to:

800-631-8112

(in NJ call 201 540-0445)



creative computing book service

“Nothing is as easy as it looks”



Building Your Own



The Best of Byte, Vol 1

Helmers & Ahl. Contains the majority of material from the first 12 issues of *Byte* magazine. The 146 pages devoted to hardware are crammed full of how-to articles on everything from TV displays to joysticks to cassette interfaces and computer kits. Also 125 pages of software and applications ranging from on-line debuggers to games to a small business accounting system. A section on theory examines the how and why behind the circuits and programs. 386 pp. \$11.95 [6F].

How to Build a Computer-Controlled Robot

Tod Loofbourrow. Every step of the construction is explained, with photographs and diagrams. The complete control programs for a robot are clearly written out. The robot can be built within the budget of the average hobbyist and the only technical requirement for building him is the ability to read and understand a circuit diagram. 144 pp. \$7.95 [11E].

Small Computer Systems Handbook

Sol Libes. The emphasis throughout this primer is on the important practical knowledge that the home computer user should have to be able to intelligently purchase, assemble, and interconnect components, and to program the microcomputer. Only a minimal knowledge of electronics is required to use this book. 196 pp. \$8.45 [11D].



Build Your Own Working Robot

David Heiserman. Complete plans, schematics and logic circuits for building a robot. Not a project for novices, this robot is a sophisticated experiment in cybernetics. You build him in phases and watch his capabilities increase and his personality develop. Phase I is leash led, Phase II has a basic brain, while Phase III responds and makes decisions. 238 pp. \$5.95 [9M].

Power Semiconductor Handbook

Covers high-power transistors and related switching devices. Want your computer to control some external device? Then this is the book. 800 pp. \$3.95 [9C].

Pocket Calculators

Games With The Pocket Calculator

Sivasailam Thiagarajan and Harold Stolovitch. A big step beyond tricks and puzzles with the hand calculator, the two dozen games of chance and strategy in this clever new book involve two or more players in conflict and competition. A single inexpensive four-banger is all you need to play. Large format. 50 pp. \$3.95 [8H].



Games, Tricks and Puzzles For A Hand Calculator

Wally Judd. This book is a necessity for anyone who owns or intends to buy a hand calculator, from the most sophisticated (THE HP65, for example) to the basic "four banger." 110 pp. \$4.95 [8D].

SUPER VALUES !!!

Art, Music, and Literature




Artist and Computer

Ruth Leavitt. This unique art book covers a multitude of computer uses and the very latest techniques in computer-generated art. In its pages, 35 artists explain how the computer can be programmed either to actualize the artist's concept (such as the visualization of fabric before it is woven) or to produce finished pieces. Over 160 examples, some in full color. 122 pp. \$4.95 softbound [6D], \$10.00 hardbound. [6E].

The Technology of Computer Music

Max Matthews. If you're interested in creating music on your microcomputer, here is an excellent source book written by the "Father of Computer Music." Includes fundamentals of digital sound generation, including the sampling theorem, digital to analog converters, analog to digital converters, filtering and storage of musical data. Also, a description of MUSIC V, a high level music language. \$16 hardcover [10N].



COMPUTERS, COMPUTERS, COMPUTERS In Fiction And In Verse

D. Van Tassel, Editor. This collection of stories, commentaries and poems project the reader into a world where lifestyles are dominated by the computer to an extent far greater than they are by the telephone today. By revealing reactions and effects, the stories offer the reader insight into what is a potential reality. Cleverly-written, this book should entertain anyone who is aware of the computer's impact on society. Includes work by such distinguished writers as Gordon R. Dickson, Art Buchwald, Michael Shaara and Bob and Ray. 192 pp. \$6.95 [9X].

To Order

Use the bound-in order form or send your check for books plus \$2.00 shipping and handling per order (Foreign: \$1.25 per book) to Creative Computing, P.O. Box 789-M, Morristown, NJ 07960. NJ residents add 5% sales tax. Visa or MasterCard are acceptable also. For faster service, call in your bank card order toll free to:

800-631-8112
(In NJ call 201 540-0445)



Compleat Computer Catalogue



We welcome entries from readers for the "Compleat Computer Catalogue" on any item related, even distantly, to computers. Please include the name of the item, a brief evaluative description, price, and complete source data. If it is an item you obtained over one year ago, please check with the source to make sure it is still available at the quoted price.

Send contributions to "The Compleat Computer Catalogue," *Creative Computing*, P.O. Box 789-M, Morristown, NJ 07960.

COMPUTERS



PRODIGY ONE FROM COMPUTER MART OF NEW JERSEY

Computer Mart of New Jersey has announced the formation of Prodigy Systems, Inc., a new division specializing in the manufacture of low cost, small business computer systems.

The Prodigy line of computers features integrated systems of hardware and software and uses Protege, a language developed specifically for use in the development of software for Prodigy's turn-key systems. The Prodigy One computer will carry a retail price of \$12,000.

Prodigy Systems is currently recruiting distributors for its products. Prodigy Systems, Inc., 497 Route 27, Iselin, NJ 08830.

CIRCLE 225 ON READER SERVICE CARD

TELERAY'S "MEMORY MACHINE"

Teleray's Model 12 offers 48 lines of display memory (with a rolling 24-line window), plus 6500 characters of function memory which can be used to store display data for later editing or transmission. This "parking" memory capability expands the editing work space to 128 lines (more than 5 full pages) of data.



It can be used either interactively (e.g., data inquiry, computer-aided instruction) or for off-line editing or program development. Its expanded function memory holds up to 32 programmable functions - text, forms, control sequences loaded from either keyboard or host computer. It offers complete editing capability, including insert/delete, five-segment clear, programmable tabs and displayable control codes (monitor mode), plus five field modifiers: protect, dim, blink, inverse video and underline, programmable in any combination. \$1690.

Telray, Box 24064, Minneapolis, MN.

CIRCLE 226 ON READER SERVICE CARD



SMALL BUSINESS SYSTEM

Psytek, Inc., introduces a desk top computer system. The Psytek 770 comes complete with all necessary hardware and one ready-to-run software package. Currently available standard packages include: General Ledger, Accounts Receivable, Accounts Payable, Payroll, Inventory Management, CPA Management System, and a Name and Address System.

The computer utilizes the Multibus board structure. External system storage is handled by two IBM compatible floppy disks. A 30 line by 80 column full size display screen is standard, as is a detachable keyboard with separate numeric pad. Any number of additional parallel interfaced printers may be purchased with the computer. \$9,955.

Psytek, Inc., 1900 Pickwick Ave., Glenview, IL 60025. (312) 729-3200

CIRCLE 227 ON READER SERVICE CARD



MULTI-USER COMPUTER SYSTEM

Basic Time announces a 10 million character hard disk computer system for the small business user. The B-200 is a multi-user system that will handle up to four CRT's or printers in any combination.

The single board CPU utilizes the 2901 microcomputer to emulate the 16 bit instruction set of the Data General Nova. The operating system includes full system utilities, and extended Basic with random access data files. Disk files contain diagnostics for all system devices.

A General Business Application Software package complete with documentation is included. The complete system is packaged in a desk with a separate printer stand. \$19,995.00.

Basic Time, 1215 E. El Segundo Blvd., El Segundo, CA 90245. (213) 322-4435.

CIRCLE 228 ON READER SERVICE CARD

A.C. POWER CONTROL for ALL COMPUTERS or COMPLETE TURNKEY SYSTEMS



Interface TO the Real World with GIMIX Relay Driver Boards. Connects to any Computer through a 20 ma. current loop (up to 4 Boards-128 Relays per port).

Interface FROM the Real World with GIMIX

★ OPTO BOARDS (up to 34 switch closures with one 8 bit Parallel I/O Port)

★ 16 BUTTON KEYPADS

★ 35 BUTTON ALPHANUMERIC KEYPADS

A Broad Range of 6800 Systems and Boards Compatible with the SS50 Bus



MAINFRAME: Includes chassis, power supply, switches, fan and mother board. **\$ 798.19**

16K SYSTEMS: Mainframe, plus 6800 CPU, 16K Static Ram and choice of I/O. **\$1344.29**
Other packages available.

16K Static RAM Boards for the SS-50 Bus

- Gold bus connectors
- 4 separate 4K Blocks
- Individual Addressing, Write Protect, and Enable/Disable for each block

\$298¹³



Memories...

As above with Sockets and Software control features **\$368¹⁶**

All GIMIX memory boards are assembled, Burnt-In for 2 weeks, and tested at 2 MHz. Add \$32.00 for 250 ns parts

TI TMS 4044's — 10% SUPPLY (Not an "equivalent", but the real thing!)

450 ns	\$5.90 each	250 ns	\$6.90 each
8K PROM BOARD			\$ 98.34
4K PPD PROM BOARD, Burner and Duplicator			198.35
2708's		each	7.90
64 or 32 x 16 VIDEO BOARD			198.71
80 x 24 SUPER VIDEO BOARD with user programmable RAM character generator			458.76
Serial I/O's	1 Port	\$8.41	4 Port 198.43
Parallel I/O's	2 Port	\$8.42	8 Port 198.45

Add \$5. handling charge on orders under \$200.


GIMIX inc.

1337 WEST 37th PLACE
CHICAGO, ILLINOIS 60609
(312) 927-5510 • TWX 910-221-4055

Quality Electronic products since 1975.

CIRCLE 150 ON READER SERVICE CARD

MEMORY

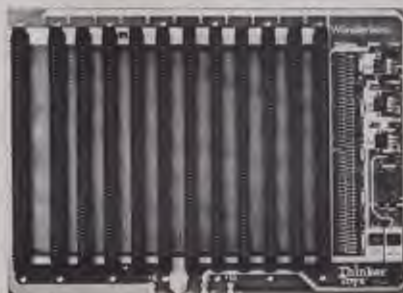

WUNDER-BUSS S-100 BUS BOARDS

Thinker Toys now has available the WunderBuss S-100 bus board in three sizes: 8-slots, 12-slots, and 20-slots. These boards all feature Noise Guard, the noise squelching system which fields signal paths and actively terminates all data lines.

Signal isolation is achieved by a cross-coupled system of ground lines which are interlaced between signal lines and cross-coupled ground planes. Further, each data line is actively terminated by a circuit which absorbs signal reflections and noise.

Thinker Toys, 5221 Central Ave., Richmond, CA 94804. (415) 524-2101.

CIRCLE 220 ON READER SERVICE CARD

16K RAM MEMORY LITERATURE

A data sheet describes two 26Kbyte static RAM memory boards from Industrial Micro Systems.

The memories feature on-board memory management system which allows working memory to be expanded to greater than 64K. Memory access time is quoted at either 250 or 450 nanoseconds.

Other features of this S-100 bus board include a dedicated ROM option - shunt selectable - to disable from 1 to 15 Kbytes in 1K increments from either end of memory.

Industrial Micro Systems, Inc., 628 N. Eckhoff, Orange, CA 92668. (714) 633-0355.



CIRCLE 231 ON READER SERVICE CARD



**** TRS 80 DISK BASED BUSINESS SOFTWARE ****

ALL PACKAGES UTILIZE RANDOM ACCESS. EXTENSIVE ERROR TRAPPING, EFFICIENT CODE, FOLLOW-UP ASSISTANCE, USER DESIGNED SCREENS, AND MUCH MORE. WE'RE NOT "CHEAP" BUT WE'RE DE-BUGGED.

INVENTORY

REPORTING INCLUDES SLS, REORDER, OIL, VEN, COST, REC. RANDOM ACCESS BY ITEM # OR BY STOCK #. 100 VENDORS 1400 ITEMS.

GENERAL LEDGER

300 ACCTS + CONTRA (USER DEFINED). TRAIL BAL, P&L, BAL SHEET, JOURNAL LISTING, CHART OF ACCTS. DOESN'T ACCEPT O/B JOURNALS.

PAYROLL

SAL/HRLY INS DED + 2 MISC. FULL REPORTING FICA, STATE, FED, F.U.T.A. 80 + EMPLOYEES.

ACCTS REC

BAL FWD, AGING AND BILLING RPTS. RECORDED BY INV # OR CHECK #. 300 ACCTS.

MAIL/LIST

SORT BY ZIP, NAME, USER CODES. FULL OR PARTIAL PRINTING. 4 LINES N/A. SUP-PORTS 900.

GAMES PACK

6 GAMES INCLUDING 80-OUT (BREAKOUT). DISK OR TAPE. TAPE (16K LEVEL 2) DISK (32K RAM)

WHOOPIES I'M RUNNING OUT OF ROOM

PRICES: INVEN, G.L., PAYROLL, A/R \$265.00
MAIL/LIST \$79.96 GAMES PACK \$39.96
ALSO AVAILABLE JOB COSTING* PAYABLES, AND CUSTOM APPLICATIONS AND FREE UP TO DATE INFORMATION ABOUT NEW AND FUTURE TRS-80 PRODUCTS.

AFFORDABLE BUSINESS SYSTEMS INC.
2101 E. BROADWAY RD., SUITE NO. 11
TEMPE, AZ 85282 TEL.: 602-966-3330

SPEND A DIME AND CALL FOR MORE INFORMATION
CIRCLE 105 ON READER SERVICE CARD

Problems For Computer Solution

At last, a book of practical and stimulating exercises for teaching the basics of computer problem-solving. *Problems for Computer Solution*, by Stephen J. Rogowski, is an ideal instructional aid. This edition is designed to encourage research and preliminary investigation through problems in many subject areas: algebra, trigonometry, arithmetic, geometry, number theory, probability, statistics, calculus and science.

Problems for Computer Solution is chock full of challenging problems like "The Faulty Speedometer Stopper", "The Famous Indian Problem", "Pascal's Triangle (The Challenging Way)", "Love Letter", "Telephone Book Problem", and "Computer Verse Forms". Several special interest problems are posed which deal with unsolved problems in mathematics.

The book can be used with any computer-oriented course at the high school or college level or for self learning. Solutions in the Teacher's Edition are given in Basic, but any programming language can be used to solve the problems.

Problems for Computer Solution costs \$4.95 (106 pages, softbound). *Teacher's Edition* (with solutions) \$9.95. Add \$1.00 for shipping and handling. NJ residents add 5% sales tax. Substantial discounts are available on quantity orders. Call or write for information. Send order and payment to Creative Computing, Box 280-M, Morristown, NJ 07960. For faster response call in bankcard order toll free:

800-631-8112
(in NJ, 201-540-0445)

TERMINALS & I/O



PRINTER FROM MALIBU

The Model 165 printer from Malibu can be operated in three modes: as a high-speed dot matrix printer at 165 characters per second; a reduced speed, letter-quality dot matrix printer at 90 cps; or a full-graphics matrix printer.

Applications such as computer portraits, custom character sets (Japanese, Katakana, music symbols, etc.) and hi-density characters for word processing are possible. Complete dot control is provided for 60x72 dots/inch. Some features of the 165 include: underlining, expanded characters, programmable horizontal and vertical tabs, selectable left margin, easy user-adjustable platen (up to 6-part forms) and a time-delay feature which shuts off the fan when the printer is idle. \$2395.

Malibu Design Group, Inc., 8900 Eton Ave., Suite G, Canoga Park, CA 91304. (213) 998-7694.

CIRCLE 232 ON READER SERVICE CARD



MPI DOT MATRIX IMPACT PRINTER

MPI announces the Model 88T Dot Matrix Impact Printer. Features include: 100 characters-per-second bi-directional printing and print line formats of 80, 96 or 132 columns, a full upper and lower case 96 character ASCII set printed in a 7x7 matrix for crisp, clear printing on the original plus two copies, double wide characters are software selectable and can be intermixed on any line for message high-lighting.

Forms handling is implemented with a stepper-motor driven tractor paper feed system that can be adjusted to accept fan-fold forms varying from one to 9.5 inches in width. \$749.

MPI, 2099 West 220 South, Salt Lake City, UT, (801) 973-6053.

CIRCLE 233 ON READER SERVICE CARD

RADIO SHACK LINEPRINTERS

Two line printers, introduced by Radio Shack for use with their TRS-80 Microcomputer Systems, can also be used with most other computers having parallel I/O ports.

The TRS-80 Line Printer III provides full 15-inch wide 132 character lines and prints at 120 characters per second in 9x7 dot matrix upper and lower case letters.



The printing head prints in both directions as it moves across the paper. \$1,999.

TRS-80 Line Printer II also produces expanded as well as upper and lower case letters using a 7x7 dot matrix format. Speed is 50 characters per second on 8-inch lines of 80 characters each. It operates in both friction-feed and pinfeed modes and can handle continuous roll paper, single sheets and continuous forms up to 9 1/2 inches wide with an original and up to two copies. \$999.



Radio Shack, 1300 One Tandy Center, Fort Worth, TX 76102. (817) 390-3272.

CIRCLE 234 ON READER SERVICE CARD



DataSoft Research PRESENTS


a Pet* software production



PREVIEWS

PAD™	PROGRAM GENERATOR	SOFTFILE
Over a dozen functions to aid you in designing your output display: ■ Reduce programming time! ■ Create geometric shapes ■ Pattern designs ■ Graph & Chart displays ■ Gameboard/quiz masterboards ■ Label & Title displays ■ Draw horizontal, vertical & diagonal lines ■ Free ■ SAVE DISPLAY for later use! ■ and more...	TOP SECRET	LOADING SOON
ADMISSION \$19.50	ADMISSION \$14.50	ADMISSION \$14.50

See these NEW releases on a PET* near you!



DataSoft Research

the company that makes programming a little easier

3360 LEY DRIVE SUITE #816
LOS ANGELES, CALIFORNIA 90027

*PET is a Trademark of Commodore

- Dealer inquiries invited -

PRINTED IN U.S.A.

CIRCLE 141 ON READER SERVICE CARD

MAGAZINES, JOURNALS

NEWSLETTER FOR ENGINEERS

Engineering Computer Applications Newsletter (ECAN) is designed to inform and advise engineers on how to use advanced computer technology.

The newsletter will contain articles on small computers, combining large and small computers, printers, plotters, terminals, storage units and engineering programs. The publisher, Engineering Computer Applications, Inc., promises that ECAN will be written by engineers for engineers and use of computer jargon will be minimal.

Charter subscriptions will be \$24 (\$30 overseas airmail) for 12 monthly issues. Requests for a free issue and other inquiries should be directed to: Kent Johnson, Editor, Engineering Computer Applications Newsletter, 5 Denver Tech Center, P.O. Box 3109-P2A, Englewood, CO 80111.

CIRCLE 237 ON READER SERVICE CARD

BOOKS AND BOOKLETS

GUIDE TO MICROCOMPUTERS

MicroShopper, a business and personal guide to microcomputers, has been announced by The Phoenix Group, Inc. The 72-page reference and decision-making book features 150 detailed photographs of equipment from more than 100 manufacturers representing over 500 products.

The introduction offers a common sense approach to computer jargon and business systems and software are discussed in non-technical terms. \$3.95.

P.G.I. Publishing, 1425 West 12th Pl., #106, Tempe, AZ 85281. (602) 894-9247.

CIRCLE 238 ON READER SERVICE CARD

MICROCOMPUTER SELECTION GUIDE

The "Guide to Desktop Microcomputer Selection" is a new publication containing more than one hundred pages of comparative information on the TRS-80, Apple, IBM 5110, WANG 2200 Series, Hewlett-Packard 9800 Series, and the TekTronix 4050 Series microcomputer.

The Guide contains information not readily available from other sources, including a glossary of terms covering hardware and software characteristics of the computers surveyed and a comparative index to BASIC commands and syntax used by the computer. \$13.65.

Atlantic Analysis Corporation, 5 Koger Executive Center, Suite 219, Norfolk, VA 23502. (804) 461-1980.

CIRCLE 239 ON READER SERVICE CARD

MICROCOMPUTER RESOURCE HANDBOOK

The First New England Microcomputer Resource Handbook, a complete guide to microcomputers and their applications, has been released by The Boston Computer Society. Topics of interest to novices, prospective purchasers and system owners are covered. Sections on product comparisons, application software, buying tips, support devices, computer stores, introductory informa-

tion, publications, user groups, consultants, books, repair companies and other resources are included. A glossary which defines buzz words in terms of real life situations is also provided. \$2.

The Boston Computer Society, 17 Chestnut St., Boston, MA 02108. (617) 227-9178.

CIRCLE 240 ON READER SERVICE CARD



FORT//80™

FORTTRAN

for the 8080 only **\$99.95**

- FORT//80 is a subset of Fortran IV with many powerful enhancements!
- FORT//80 is an advanced software development tool!
- FORT//80 is AFFORDABLE!!

FEATURES

- FORT//80 directly addresses 8080 ports as FORTRAN variables.
- I/O drivers accessed via FORTRAN read/write statements.
- FORT//80 accepts embedded in-line machine code.
- 8080 condition codes are available as FORTRAN keywords and can be operated upon.
- Multiple assignment operators accepted.
- Interleaved listings and object code for quick debugging.
- Symbolic names up to 31 char long simplify documentation.
- Constants expressible to base 2, 8, 10, 16 or as char strings.
- Compact. Needs only 25K for compiler and minimum workspace.
- Fast. Runs up to 10 times as fast as PLM.
- FORT//80 directives specify location of code in memory at run-time.
- Interrupt and interrupt control.
- FORT//80 control of interrupts and interrupt service lines.
- All code runs on 8080, 8085 and Z80 (upward compatibility).
- FORT//80 is a true resident compiler and generates directly executable object code. No run time package needed.
- FORT//80 is very fast. It compiles quickly and produces dense highly optimized code.
- Single and double precision IBM format floating point arithmetic.

PRICING

FORT//80 CPM version and manual on 8" diskette	\$99.95
FORT//80 Language manual separately	20.00
FORT//80 Implementation manual	20.00
Sample diskette validation program and data	5.00

Shipping charges to US and Canada postpaid, overseas add \$5.00. Please add appropriate state sales tax. Master Charge and Visa accepted.

1. FORT//80 is supplied on a single use basis, subject to the signing of a non-disclosure agreement.
2. FORT//80 can be implemented with other disc operating systems using the implementation manual or special versions available by quotation.
3. The purchase price of manuals and sample programs will be credited towards subsequent purchase of FORT//80.

ramsay electronics

BOX 4072, ROCHESTER, NY 14610
PHONE ORDERS CALL 716-271-6487

Distributors:

- Digital Research of Texas, Box 401565, Garland, TX 75040, (214) 271-2461
 - Electrolabs Inc., Box 6721, Stanford, CA 94305, (415) 321-5601
 - Arkansas Systems Inc., 8901 Kanis Rd., Little Rock, KS 72205, (501) 227-8471
 - Arkon Electronics Ltd., 409 Queen St. W., Toronto, ONT M5V 2A5, (416) 868-1315
- Dealer inquiries invited.

© Arkon Electronics Ltd.

HAYDEN'S READY-TO-RUN BUG-FREE PROGRAMS...

... for others, for yourself.



SARGON II
GRIDIRON:
A MICROFOOTBALL GAME
BATTER UP!!:
A MICROBASEBALL GAME
BACKGAMMON
SONGS IN THE KEY
OF APPLE
CROSSBOW
MAYDAY
GAME PLAYING WITH
BASIC
SKETCHMODE
KEYNOTE
MICROTYPING
GENERAL MATHEMATICS-1
COMPLEX MATHEMATICS
ENGINEERING
MATHEMATICS-1

Give one this holiday season!

Hayden Book Company, Inc.

50 Essex Street, Rochelle Park, NJ 07662

CIRCLE 151 ON READER SERVICE CARD

FLOPPY DISCS



DOUBLE-DENSITY DRIVES FOR TRS-80

Percom Data Company announces a dual drive mini-disk unit featuring double-density storage for the TRS-80.

The TFD-1000 unit provides 800K bytes of on-line storage. Two systems (four drives) may be used with a TRS-80 to provide 1.6M bytes on line.

It is supplied complete with an interconnecting cable (accommodating one or two units), a Peripheral Adapter Module (PAM) PC card, Percom's MICRODOS operating system, and support documentation. \$2495.

Percom Data Co., 211 N. Kirby, Garland, TX 75042. (800) 527-1592.

CIRCLE 241 ON READER SERVICE CARD

EXIDY DEBUTS VIDEO/DISKS

Exidy introduces a Video/Disk for the Sorcerer computer. It contains a 12" video display and dual mini-floppy disk drives with data storage capacity of 630K words. The swivel based unit attaches directly to the Sorcerer computer's keyboard enclosure to form a desktop computer system for small business data processing. Resolution is 240x512 pixels. Software included consists of CP/M, Z80 Assembler, text editor, linking loader and Microsoft Disk Extended Basic. \$2,995.

Exidy Data Products, 390 Java Dr., Sunnyvale, CA 94086.



CIRCLE 242 ON READER SERVICE CARD

PET:™ CURSOR

The Original Cassette Magazine for the Commodore PET.

- Five excellent programs come to you each month on a C-30 cassette, ready to load and run.
- Every issue has an animated "Front Cover" that uses PET graphics to the fullest.
- Compare value: each issue of CURSOR includes a featured program that would cost \$7.95 to \$12.95 elsewhere!
- CURSOR is mainly entertainment, but we also publish useful utility programs, as well as educational and business programs.
- With each monthly CURSOR cassette, you also receive CURSOR notes with written instructions for the programs, and a fresh, opinionated look at our crazy industry.

**CURSOR = High Quality
PET Software**

- ☐ 12 issues only \$33 in US & Canada
 - ☐ 6 issues for \$20
 - ☐ Sample Copy \$3.95
- We Accept VISA and Mastercharge

Name _____

Address _____

City _____

State/Zip _____

CURSOR, Box 550, Goleta, CA 93017

Our Subscribers are Happy People!
CIRCLE 139 ON READER SERVICE CARD

164

IRIDIS™

Programs for your ATARI®

- **IRIDIS** is a monthly cassette magazine of programs for the ATARI 400 and 800 personal computer.
- You get four excellent programs each month on a high quality C-30 cassette, ready to load and run.
- Each issue of **IRIDIS** has an animated "Front Cover" that will delight your eyes!
- With each cassette you get **IRIDIS Notes**, a lively newsletter of information about the ATARI computer. You may disagree with our opinionated editors, but you'll never be bored!
- **IRIDIS** brings you fun and games, education, and business programs and "software tools" that will help you enjoy your ATARI.

- ☐ 12 issues for \$39.95 in US & Canada
- ☐ 4 issues for \$14.95
- ☐ Sample copy \$4.95

We Accept VISA and Mastercharge

Name _____

Address _____

City _____

State/Zip _____

IRIDIS, Box 550, Goleta, CA 93017

CIRCLE 155 ON READER SERVICE CARD
CREATIVE COMPUTING



CDC'S CARTRIDGE DRIVE INTERFACED TO S-100 SYSTEMS

MicroAge Wholesale has announced the development of an interface capability for the Control Data Corporation CMD 16/16 cartridge drive to North Star and Alpha Micro-based microcomputer systems. The design permits maximum utilization of operating software due to expanded capacity and speed of the hard disk. MicroAge includes the drive, S-100 controller, software interface and disk pack in a single package. \$9995.00

MicroAge, 1425 West 12th Pl., Tempe, AZ 85281. (602) 967-1421.

CIRCLE 243 ON READER SERVICE CARD



DUAL DISK DRIVE SYSTEM

Tarbell Electronics has announced the Tarbell VDS-II Vertical Disk Subsystem. The system includes two Siemens 8" Disk Drives, Tarbell Floppy Disk Interface, CP/M Disk Operating System, and Tarbell Basic and it is packaged in a cabinet, with fan and power supply, all cables and connectors, and complete hardware and software documentation.

The VDS-II is a Shugart-compatible, single-density, single-sided dual drive system which uses standard IBM-compatible softsectored 8" diskettes.

CP/M is the operating system for the Tarbell Floppy Disk Interface, and includes such capabilities as batch processing, text editor, assembler, debugger, compiler, copy capabilities and peripheral interchange. Tarbell Basic, included in the package, runs on 8080, 8085 or Z80 CPUs. \$1888.

Tarbell Electronic, 950 Dovlen Pl., Suite B, Carson, CA 90746. (213) 538-4251 or (213) 538-2254.

CIRCLE 244 ON READER SERVICE CARD

MINI DISK DRIVE FOR TRS-80

Microcomputer Technology, Inc. announces a large capacity mini drive for the Radio Shack TRS-80.

The Model TF-7 features 77 tracks and has the largest storage capacity of any mini drive now available for the TRS-80: 195 Kbytes of on-line storage.

The MPI unit provides features found in larger 8-inch disk drives such as door lock and automatic diskette ejection. Operating software is available directly from Radio Shack. \$625.

Microcomputer Technology, Inc., 2080 South Grand Ave., Santa Ana, CA 92705. (714) 979-9923.

CIRCLE 245 ON READER SERVICE CARD

DISK DRIVE FOR TRS-80

Cost Effective Computer Services announces the MF-80 mini floppy disk drive for the TRS-80. The MF-80 is directly compatible with all Radio Shack TRS-80 software and hardware. It consists of the MPI B51 drive and a heavy duty power supply enclosed in a silver case. The B-51 drive features 40 tracks, dust-tight door and diskette eject. \$359.

Cost Effective Computer Services, 728 S. 10th St. Suite #2, Grand Junction, CO 81501.

CIRCLE 246 ON READER SERVICE CARD



YOU THINK YOU'VE SEEN WORD PROCESSING SOFTWARE?

The **MAGIC WAND**TM Word Processing
System offers you the best features of any system
in the micro market

FEATURES INCLUDE:

- Full-screen text editor
 - Simple, control key operation
- Edit programs as well as text
 - Assemble, compile or run programs without modification
- Files larger than memory
 - Files up to 256K
- Library files
 - Merge part or all of one file with another
- Spool printing
 - Print a file while editing another
- Easy page formatting
 - Simple commands set margins, page length, etc.
- Override commands at run-time
 - Give any command from the keyboard as well as in file
- Variable pitch control
 - Change pitch in mid-line, even mid-word
- Up to 128 user-defined variables
 - String, numeric or dollar format
- Form letter generation from external data files
 - Compatible with both sequential and fixed-record files
- Conditional commands
 - Any command may be conditional
- Print to disk and/or printer
 - Save all or part of output on disk
- Switch from specialty printer to CP/M list device
 - Print the same file on either specialty or standard printer

EASE OF OPERATION

With all its power, the MAGIC WAND is remarkably easy to use. This is no accident. The command structure is designed to be flexible and logical so that you can perform basic functions with a minimum of commands.

We have included in the manual a step-by-step instructional program, for the person who has never used a word-processor before. The trainee uses sample files from the system disk and compares his work to simulated screens and printouts.

In addition to the lessons, the manual has a complete documentation of the command structure, special notes for programmers, an introduction to CP/M for non-programmers and a glossary. The manual is typeset, rather than typewritten, for greater legibility.

We have written the manual in non-technical English, because we want you to read it. We don't overload you with a bunch of jargon that could confuse even a PhD in Computer Sciences.

We send out newsletters so that users of the MAGIC WAND can learn special applications of the print commands. For example, we might show you how to create a mailing list or set up an index for a file.

In short, we've done everything we can to make things easy for you. Because the best software in the world is just a bunch of code if you can't use it.

For more information, call or write:

small business applications, inc.

3220 Louisiana • Suite 205 • Houston, Texas 77006 • 713-528-5158

CP/M is a registered trademark of Digital Research Corp.

CIRCLE 201 ON READER SERVICE CARD

PERIPHERALS



SMOKE SIGNAL'S MULTI-FUNCTION CPU BOARD

Smoke Signal Broadcasting announced its 6800-based Super Computer Board for use as a microcontroller, business or single-board computer.

The SCB-68 features 2 MHz operation, 1K of scratch pad RAM, a 2K EPROM monitor and can address 1 MB of memory organized in 16-64K byte pages. It also provides space for up to 20K of EPROM.

Optional features include a floating point processor, RS-232 connector, real time clock and serial I/O port with two controllable output lines and programmable baud rates to 56K baud.

Available for immediate delivery.

Smoke Signal Broadcasting, 31336 Via Colinas, Westlake Village, CA 91361, (213) 889-9340.

CIRCLE 247 ON READER SERVICE CARD

APPLE II SPEECH SYNTHESIZER

Computalk Consultants, announces the Model CT-1A, a speech synthesizer for the Apple II micro-computer.

The Model CT-1A is a self-contained system with its own 14" Wx4" Hx7" deep chassis and 110 VAC power supply. Internally, the single interface circuitboard contains an onboard 2 Watt audio amplifier, an S-100 adapter, and an Apple II compatible edge connector. An interconnect cable and Apple controller card, manual and software package (cassette or disk) completes the package. Standard phono jacks provide connections for external speakers, headphones or hi-fi amplifier. \$595. (Limited time introductory price of \$495).

Computalk Consultants, 1730 21st St., Suite A, Santa Monica, CA 90404. (213) 828-6546.

CIRCLE 248 ON READER SERVICE CARD SPEECHLAB CONTROLLER CARD

Heuristics, Inc., announces its Model 70 Controller card to operate with its Model 20A Speechlab speech recognition system for use on the Apple II Computer.

The Model 70 board provides two single pole double-throw relay closures with which the serious user

can control external devices. Through the Model 70 controller and 20A voice data input the Apple user easily can voice control test equipment, demonstration equipment or hobby projects such as model railroads.

Heuristics, Inc., 900 N. San Antonio Rd., Los Altos, CA 94022. (415) 948-2542.

CIRCLE 249 ON READER SERVICE CARD



VIDEO DIGITIZER

A fast-scan video digitizer that operates on data from a video camera and can be used in a variety of applications has been introduced by Vector Graphic Inc.

The device, for S-100 bus computers, converts output from the camera—or other source of composite video—into 8-bit gray scale digital information. It can be used in numerous consumer environments and in medical, security and other special-purpose applications requiring image storage and analysis. \$175.

Vector Graphic Inc., 31364 Via Colinas, Westlake Village, CA 91361. (213) 991-2302.

CIRCLE 250 ON READER SERVICE CARD



TRS-80 SAVE 10%, 15%

and more on computers, peripherals, software, and other Radio Shack® products.

Offered Exclusively By

PAN AMERICAN ELECTRONICS, INC.

A

Radio Shack

Authorized Sales Center

1117 CONWAY MISSION, TX 78572

EAST 212/283-0534

WEST 213/564-5463

NORTH CENTRAL 312/666-6098

SOUTH CENTRAL 512/581-2765

(main telephone number)



NO TAXES on out-of-state shipments.
FREE delivery available on minimum orders.
WARRANTIES honored by Radio Shack®.

CIRCLE 195 ON READER SERVICE CARD

PROGRAMMERS

Are you THE WIZARD OF WALL STREET?

Real-time TRS-80 L2 16K stock market game with supply/demand, US economy, cycles, takeovers. \$19.95 cassette.

CONTACT

METATRON, Box 900, Amherst MA 01002.

CIRCLE 164 ON READER SERVICE CARD

FREE! up to \$170 in merchandise with the purchase of PET-CBM item!!!

PET 16K Large Keyboard	\$ 995	\$130
PET 32K Large Keyboard	\$1295	\$170
PET 8K	\$ 795	\$100
PET 2040 Dual Disk (343K)	\$1295	\$170
PET 2023 Printer (press feed)	\$ 849	\$110
PET 2022 Printer (trac feed)	\$ 995	\$130
KIM-1 \$159 (400 500 for Power Supply)		SYM-1 \$222.00
6500 Programming Manual		6.50
2114 L 450 ns	5.70	24/5.15 100/4.45
2716 EPROM (5 Volt)		39.00
6550 RAM (for 8K PET)		12.70
6502 Microprocessor Chip		9.75
6522 VIA		9.75
6520 PIA		5.50
PET 4 Voice Music Board (MTUK-1002-2)		\$ 45.00
Music Software (K-1002-3C) for PET		\$ 16.00
Programmers Toolkit - PET ROM Utilities		\$ 45.00
Microchess 2.0 for PET or APPLE		17.90
PET Word Processor - Machine Language		24.00

3M "Scotch" 8" disks 10/\$31
3M "Scotch" 5" diskettes 10/\$35
Verbatim 5" diskettes 10/\$27

Cassettes (all tapes guaranteed)
Premium quality, high output lownoise in 5 screw housing with labels: AGFA PE 611
C-10 10/5.95 50/25.00 100/48.00
C-30 10/7.00 50/30.00 100/57.00
WRITE FOR 6502 AND S-100 PRODUCT LIST
115 E. Stump Road
Montgomeryville, PA 18936
(215) 699-8386

A B Computers

CIRCLE 101 ON READER SERVICE CARD

— Professional —

Real Estate Programs

available on cassette or diskette
for Apple & TRS-80 II

Property Management System

- Renter Information Report
- Rental Income Tracking
- Late Rent Reporting
- Expense Analysis by Building
- Comparative Utilities Reporting
- Yearly Totals for Tax Reporting
- Easy Data Entry and Editing

System w/Manual \$125.00
Manual \$10.00

Program Modules:

- 1) Home Purchase Analysis
- 2) Income Property Cashflow Leverage
- 3) Construction Cost Profit
- 4) Tax Deferred Exchange
- 5) APR Loan Analysis

Price Per Module \$20.00
Add \$5.00 for Programs on Diskette

At Computer Stores
everywhere or call
(213) 372-9419
for C.O.D.

software
reality company

2045 Manhattan Ave., Hermosa Beach, CA 90254

CIRCLE 197 ON READER SERVICE CARD

SOFTWARE

SYSTEMS SOFTWARE

LANGUAGES

Pascal/M brings the language power of Pascal together with the file handling capabilities of CP/M and allows the user full access to CP/M data files written in other languages and stored under CP/M. \$350. Digital Marketing, 2670 Cherry Lane, Walnut Creek, CA 94596. (415) 938-2880

CIRCLE 251 ON READER SERVICE CARD

Versions of Xplo, a simplified Pascal-type language for 20K Apple II, Kim, Tim and Sym systems are currently available for under \$70. The 6502 Program Exchange, 2920 Moana, Reno, NV 89509.

CIRCLE 252 ON READER SERVICE CARD

Chung/Yuen Tiny Pascal for the TRS-80 provides the Tiny Pascal compiler, text editor, Tiny Pascal monitor, sample programs and a user's manual. Side two of the cassette contains a larger compiler and complete source to the compiler written in Pascal. \$40. Supersoft, P.O. Box 1628, Champaign, IL 61802. (217) 344-7596.

CIRCLE 253 ON READER SERVICE CARD

SYSTEMS

Newtech Computer Systems announces its MV-68 Multivoice Music Interpreter, which generates up to four voices of music on a single Newtech Model 68 Music Board, on miniFlex 1.0 compatible disk. Newtech Computer Systems, Inc., 230 Clinton St., Brooklyn, NY 11201. (212) 625-6220.

CIRCLE 254 ON READER SERVICE CARD



The Simplex Video Plotter for the Level II 16K TRS-80 accepts input in the form of one or two continuous functions, along with various control parameters and option selections, and produces on the video screen a two-dimensional plot of the functions. \$22.50. Stephen E. Gregory, 3217 Celanese Rd., Rock Hill, SC 29730.

CIRCLE 255 ON READER SERVICE CARD

Roger's Easel allows Apple II users to draw low resolution color pictures using the computer's game paddles. Completed pictures may be saved to tape or disk and recalled later. \$16.95. Southwestern Data Systems, P.O. Box 582, Santee, CA 92071. (714) 562-3670.

CIRCLE 256 ON READER SERVICE CARD

Transfer allows the user to connect any two CP/M compatible computers together with serial or parallel interfaces at any baud rate and transfer programs or files between the two machines. \$49.95. Computer Services, P.O. Box 2292, Hickory, NC 28601. (704) 294-1616.

CIRCLE 257 ON READER SERVICE CARD

A communications package called IC (intersystems communications) for CP/M operating systems permits communication with other computers through a user-selected RS-232 port. Diskette only version, \$150; diskette/PROM version, \$200. DOC, a North Star Basic utility, aids the programmer in documenting, optimizing and maintaining the confidentiality of his programs. \$59. MUFS, based on the Vector Graphic System B, is a PROM resident supervisor which allows the System B to run standard 8" disks. North Star 5 1/4" disks and Micropolis quad density disks. Mini Business Systems, 2461 S. Main, P.O. Box 15587, Salt Lake City, UT 84115.

CIRCLE 258 ON READER SERVICE CARD

RELIANCE

America's Most Versatile
Line of Customized
Audio Visual Packaging

Audio Cassette Albums



CA2-2N



CA2LL-6

Corrugated Mailers



M-1



M-2

For complete catalog write or phone:
RELIANCE Plastics & Packaging Division
108-18 Queens Boulevard
Forest Hills, N.Y. 11375 (212) 544-9800

CIRCLE 198 ON READER SERVICE CARD

STOCK MARKET • TRADER ENTREPRENEUR

OPTION ANALYSIS SYSTEM

This system is strictly for the market speculator. Working with price, calculated volatility, and calculated average daily premium, this system picks the best buys from 75 or more options. Judgement by the analyst is required. For \$30.00 you receive two programs plus sample data base and instruction manual. TRS 80 LEVEL II and PET

STOCK MARKET ANALYSIS SYSTEM

Technical analysis, 12 daily and 15 weekly indicators, for the stock market enthusiast. This system signals the Oct. 78 debate. For \$25.00 you receive two programs plus data base and 27 page detailed instruction manual. TRS 80 LEVEL II or II 16K and PET

FINANCIAL ANALYSIS SYSTEM

Includes two programs and hard copy instructions for better control of your stock and option transaction. For \$20.00 you receive software with eight analysis routines. Two of these routines are stock transactions which made money and option transactions which made money. Six more program routines exist with some consideration given to taxes. Please indicate. TRS 80 LEVEL II 16K or PET 8K

ACCOUNTING ANALYSIS SYSTEM

Includes two programs and hard copy instructions for a small cash enterprise. From your data base a Profit and Loss Statement as well as a Balance Sheet are produced. In addition simple budget comparisons are made. Please remit \$20.00 and indicate. TRS 80 LEVEL II 16K or PET 8K

LETTER PROCESSOR

This program for TRS 80 owners with printers. Generates letters to different individuals with the same body. Cassette file stores names and addresses. Remit \$15.00.

Distributed by: STEVEN E. SHAW, P.E.
P.O. Box 1707
Tampa, Florida 33601

CIRCLE 211 ON READER SERVICE CARD

**YOUR AD
WILL GET
RESULTS HERE**

DISK DRIVE HEAD CLEANER



TBS is proud to introduce the only **DISK DRIVE HEAD CLEANER** on the market for TRS-80 and APPLE. By simply using the program provided and inserting the disk shaped cleaning card, your disk heads will stay spotlessly clean. The cost you save in maintenance will pay for this kit several times over. Using the **DISK DRIVE HEAD CLEANER** will allow more reliable disk drive operation.

The Disk Head Cleaner includes one diskette with program, one cleaning card (good for 20 cleanings), and cleaning solution. Cleaning card refills are available. This kit sells for \$12.95, and is available NOW at Computer Stores and Associate Radio Shack Stores nationwide, or directly through us.

THE BOTTOM SHELF, INC.
(404) 939-6031 • P.O. Box 49104-C • Atlanta, Ga. 30359

CIRCLE 115 ON READER SERVICE CARD

Pickles & Trout announces two software packages for the UCSD Pascal operating system. Formout is a collection of routines to do formatted output from Pascal programs. \$20. CPMread translates CP/M disk files to Pascal text files. \$25. Pickles & Trout, P.O. Box 1206, Goleta, CA 93017. (805) 967-9563.

CIRCLE 259 ON READER SERVICE CARD

The CDS Basic Compiler enables portions of North Star Basic Programs to be compiled into assembly language to achieve increased speed and to protect proprietary sections of code. \$100. Allen Ashley, 395 Sierra Madre Villa, Pasadena, CA 91107. (213) 793-5748.

CIRCLE 260 ON READER SERVICE CARD

The Xplo compiler for OSI computers compiles a program rather than interpreting each line. The manufacturer claims that speed is four to five times as fast as OSI Basic. \$79. Pegasus Software, 1981-A St. Louis Dr., Honolulu, HI 96816.

CIRCLE 261 ON READER SERVICE CARD

Micro Data Base Systems, Inc., has announced a network DBMS written in machine language for the Z-80 CPU. DBMS routines are called from host languages and have I/O and host language interface routines isolated for easy adaption to user host language/operating system combinations. \$750. Micro Data Base Systems, Inc., Lafayette, IN.

CIRCLE 262 ON READER SERVICE CARD

CRS-DOS is a comprehensive operating system for 6502 microprocessor based systems which includes a general purpose monitor package, routines for handling both serial and parallel I/O, cassette file handling, and floppy disk processing

routines. \$125. CGRS Microtech, P.O. Box 368, Southampton, PA 18966. (215) 757-0284.

CIRCLE 263 ON READER SERVICE CARD

Version 4 of the CIS Cobol compiler for microcomputers will be marketed under the name Standard Cobol. It is said to exploit the interactive nature of the microcomputer environment while meeting ANSI level 1 requirements for a Cobol compiler. Micro Focus Limited, 58 Acacia Rd., St. Johns Wood, London, NW8 6 AG.

CIRCLE 264 ON READER SERVICE CARD

T-Bug System Monitor is a machine language monitor designed to provide direct access to the Z-80 CPU. Editor/Assembler permits assembly language programming with the speed and efficiency of machine language combined with the convenience of a text editor and assembler. Radio Shack, 205 NW 7th St., Fort Worth, TX 76106.

CIRCLE 265 ON READER SERVICE CARD

Computer Services announces five versions of Bi-Direct for the Diable Hytype II 1610/1620 and compatible computers. All five versions print all text sent to the printer bidirectionally. \$99.95. Computer Services, P.O. Box 2292, Hickory, NC 28601. (704) 294-1616.


CIRCLE 266 ON READER SERVICE CARD

APPLICATIONS SOFTWARE RECREATIONAL GAMES

Dynacomp announces a line of software for North Star and TRS-80 users, including, Bridge 2.0, Hearts 1.5, Flight Simulator and Valdez, a simulation involving the navigation of a supertanker through ship and

iceberg traffic on the way to the oil port of Valdez, Alaska. Dynacomp, P.O. Box 162, Webster, NY 14580.

CIRCLE 267 ON READER SERVICE CARD

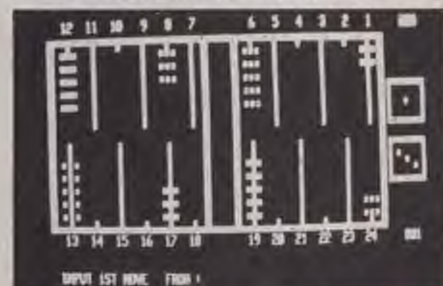

Back-40 is a machine language version of Backgammon for the TRS-80 which includes computer or player openings, computer and player doubling and scoring of all regular, gammon and backgammon endings. \$14.95. Z-Chess, also for the TRS-80, features seven levels of play and accepts and plays all standard chess moves. \$17.95. Dr. Chips, an Eliza-type program, is available for \$14.95. The Software Association, P.O. Box 58365, Dept. CC, Houston, TX 77058.

CIRCLE 268 ON READER SERVICE CARD

Source Lib announces the release of four cassette programs for the OSI Superboard II and Challenger 1P systems. Tank Battle is an action graphics game in which one or two players must out-maneuver and destroy an enemy tank. In Sub Hunt the player must track and destroy enemy subs as they move about on a sonar screen. Word Craze is a word game in which players score points by forming words from a list of randomly generated alphabetical letters. Math Skills is a "self-quiz" program in simple arithmetic. \$4.95. Source Lib, P.O. Box 970413, Miami, FL 33197.

CIRCLE 269 ON READER SERVICE CARD

Save More Than 20%

NORTH STAR — INTERTUBE THINKER TOYS — HUH

The smartest computers
at the smartest price.

Double Density	List	Our Price
HORIZON-1-16K kit,	\$1599	\$1274
Assembled & tested	\$1899	\$1519
HORIZON-2-32K kit,	\$2249	\$1799
Assembled & tested	\$2549	\$2039
HORIZON-2-32K Quad Density		
Assembled & tested	\$2999	\$2399
PASCAL for NORTH STAR on Disk	\$.49	
Powerful NORTH STAR BASIC	FREE	
THINKER TOYS DISCUS/2D	\$1149	\$ 949
MEASUREMENT SYSTEMS		
ASM Memory 64K		\$ 640
Top Quality + Top Speed + Lowest Price		
INTERTUBE II Smart Terminal	\$ 995	\$ 780
TRS-80 to S-100 HUH Kit	\$ 295	\$ 280
Assembled & tested	\$ 375	\$ 350
HUH MINI 8100 Kit	\$ 115	\$ 103
Assembled & tested	\$ 155	\$ 139
MARYELLEN Word Processor		\$ 38
Best Features of IBM & NORTH STAR		
VERBATIM DISKS		\$ 29
Which Computers Are Best?		
BROCHURE.....FREE		

AMERICAN SQUARE COMPUTERS
Kivett Drive, Jamestown, NC 27282
(919) 883-1105

CIRCLE 109 ON READER SERVICE CARD

COMPUCOVER™

COVER YOUR INVESTMENT

Beautifully protect from dust and spills with super tough, light weight, neoprene vinyl. Available in three decorator colors: Electric Blue, Bubble Tan, and White Room White.

TRS-80 KEYBOARD \$7.95 VIDEO DISPLAY \$9.95*
CASSETTE \$3.95 COMPLETE SET \$19.95*

*With expansion interface add \$3.00
(Pictured above with expansion interface.)

PET \$19.95 APPLE II \$9.95 (Keyboard only)
SORCERER \$9.95 APPLE II DISK \$3.95
TRS-80 DISK \$3.95 APPLE SET \$11.95

Include \$1.00 for postage and handling.

Send check or money-order to: Compu-Cover
P.O. Box 324
Mary Esther, FL 32568
DEALER INQUIRIES INVITED Phone (904) 243-5793
CLUB DISCOUNTS AVAILABLE

CIRCLE 122 ON READER SERVICE CARD

Here an **APPLE**
There an **APPLE**
Everywhere an **APPLE!**
APPLE!

AND GET A LOAD OF THIS DEAL!

WITH EVERY PURCHASE OF AN **APPLE II-16K**
at **\$1195.00**

We will sell you an **ADDITIONAL 32K* of Memory**
for the incredible **\$99.95**
low price of

MASTER CHARGE & VISA ACCEPTED

COMPUTER CORNER OF NEW JERSEY
439 RT. 23 POMPTON PLAINS, N.J. 07444
CALL TODAY (201) 835-7080

*PRIME TESTED MEMORY CHIPS

CIRCLE 125 ON READER SERVICE CARD

The Stock Exchange is a stock market simulation for the TRS-80 which includes a long account for conventional stock trading, short account for selling short, portfolio for updated accounting information, and moving news ticker which affects the trends of the everchanging prices on ten listed stocks. \$15.95. The object of WhereamI? is to direct your trail of arrows to score boxes without losing yourself or banging into your opponent. \$10.95. Micro-Fantastic Programming, P.O. Box 2307, Grand Central Station, New York, NY 10017.

CIRCLE 270 ON READER SERVICE CARD

Written by a programmer familiar with the NASA Shuttle Mission Simulator in Houston, Space Shuttle Landing Simulator for the Apple II gives an out-of-cockpit view of a Shuttle flight. \$15. Harvey's Space Ship Repair, P.O. Box 3478, University Park, Las Cruces, NM 88003.

CIRCLE 271 ON READER SERVICE CARD

The Mean Checkers Machine is a checkers playing program written in Fortran for the TRS-80. It offers four levels of playing skill and checks all moves for legality. All jumps are optional. \$19.95. Lance Micklus, Inc., 217 South Union St., Burlington, VT 05401. (802) 864-5899.

CIRCLE 272 ON READER SERVICE CARD

Among the 50 programs included in Volume I of Dr. Daley's PET Software Library are Trek 3, Backgammon, Conundrum, Arena and Calendar. Cassette, \$49.95; disk, \$59.95. Dr. Daley's Software, 425 Grove Ave., Berrien Springs, MI 49103. (616) 471-5514.

CIRCLE 273 ON READER SERVICE CARD

Dendron Amusements has announced the release of its game series for the North Star System. The series

includes: Panzer, Blitzkrieg, Fall of the Third Reich, D-Day, Armocar, Porkchop Hill, Africa Corps, Waterloo, The Battle of Monmouth, Starship Troopers, Middle Earth, Invasion of the Mud People and the Boston Marathon. \$9.95. Dendron Amusements, 13 Macfarlan Ave., Hawthorne, NJ 07506. (201) 423-0381.

CIRCLE 274 ON READER SERVICE CARD

A logging package for radio amateurs, written in North Star Basic, allows amateurs to keep log records on floppy disks. Logs can be edited, merged, deleted, renamed and searched, and summaries listed on any of the seven output devices supported by the North Star system. \$15. Snow Micro Systems, Inc., P.O. Box 1704, Silver Spring, MD 20902.

CIRCLE 275 ON READER SERVICE CARD

BUSINESS

Index is a data base for the assembly and upkeep of a master index of the user's program library from TRS-80 disk directories. It is menu driven and contains machine language subroutines to call and display disk directories from Basic. \$19.95. Penpatch, also for TRS-80, is written in Basic and is used to modify the text of Basic programs so that they will load into the disk version of Electric Pencil. \$9.95. Mumford Micro Systems, Box 435-A, Summerland, CA 93067. (805) 969-4557.

CIRCLE 276 ON READER SERVICE CARD

Radio Shack has introduced General Ledger I, an accounting system designed to post and maintain the general ledger of a small business. Disk Mailing List System for TRS-80 mini-disk owners is used to build and maintain a list of names and Cassette Mailing List System is a RAM-based Level-II program for non-disk users.

TRS-80 disk software

DATA BASE MANAGER IDM-III You can maintain a data base & produce reports without any programming. Define file parameters & report formats on-line. \$49. Enhanced version \$69. 32K.

ACCOUNT manage client accounts & accounts receivable. Order entry, print invoices, statements & reports. 32K req \$69.

WORD PROCESSOR Specifically designed for the TRS-80. Written in BASIC. No special hardware, no text limit. \$39. 32K version \$49.

INVENTORY 9-digit key for fast on-line random access. Reports give order info, performance summary, etc. \$39. 32K version \$49.

MAIL print reports & labels sorted by any field. Random access. special buffering technique. \$35. 32K version \$49. advanced version \$59.

KEY RANDOM-ACCESS UTIL flashing, blocking, buffering. \$19.

Send \$5 for each manual.

MOD-II, superior business software available.

MICRO ARCHITECT

96 Dothan St., Arlington, MA 02174
CIRCLE 166 ON READER SERVICE CARD

169

SORCERER

Software on quality cassette tapes.

SLOT MACHINE

A realistic Las Vegas type slot machine with good graphics and instructions on how to reset the odds. \$ 9.95

SUPER STAR TREK

Modified from '101 Games' to run in the Sorcerer. Uses 19K of memory. Save a lot of typing and debugging. \$14.95

CHB SOFTWARE
1026 W. 26th Street
San Pedro, CA 90731

CIRCLE 117 ON READER SERVICE CARD

for Radio Shack computers

● SUPER DISC
— 70 PROGRAMS \$13.95

- BUSINESS
- FINANCE
- MATH/STATISTICS
- GAMES

FREE
14 PAGE CATALOG

Write to Elliot Kleiman
National Software Marketing
4701 McKinley Street
Hollywood, Florida 33021

CIRCLE 198 ON READER SERVICE CARD

CIRCLE 174 ON READER SERVICE CARD

INTRODUCING HEWLETT-PACKARD'S HP-41C. A CALCULATOR. A SYSTEM. A WHOLE NEW STANDARD.

The new HP-41C from Hewlett-Packard is a powerful programmable calculator that features an LCD display with alphanumeric capability, 10 registers of data storage, up to 10 lines of program memory, expandable to 99 registers, up to 2,000 program steps, user-selectable subroutines, 10 constant and 50 internal flags, specific loop control, indirect addressing, local and global branching, Continuous Memory's 3075 steps.

And when you need them, Memory Modules—plug-in modules for storing programs and data, an "extra" unit. Each Module is a Printer that prints upper and lower case alpha, plus special characters and does high resolution plotting. Use the Word to input programs in two code forms (available early 1980). Application.



Modules—programs, programs, plug-in modules that give solutions in a wide range of problems. The HP-41C lets you reassign any standard function, any program you've written, or programs provided in the Application Modules to any keyboard location you want. And if you want Hewlett-Packard backs the HP-41C with total software support including an Owner's Manual and thousands of programs in the HP-41C Application Library.

Learn More. Solutions. Books, and the HP Users Library. Experience this remarkable investment. The new HP-41C from Hewlett-Packard. A calculator. A system. A whole new standard.



the computer corner

White Plains Mall, 200 Hamilton Ave.
White Plains, N.Y. 10601
(914)WHY-DATA.

CIRCLE 126 ON READER SERVICE CARD

Your TRS-80 is crying out...



With the Photo Point light pen you can eliminate that 34 key Black Box from your programs—and move up to the fast fun, direct INTERACTION with your VIDEO DISPLAY... Imagine.

Just Point-to-Play!!!

Comes complete with 2 Basic programs
Info Sheets

Order Now from:
Micro Matrix
P.O. Box 938
Pacifica, CA 94044
Phone: (415) 355-4635

Only
\$19.95

CIRCLE 169 ON READER SERVICE CARD

Inventory Control System is designed to provide the user with the information needed for control of a retail inventory. Radio Shack, 205 NW 7th Street, Fort Worth, TX 76106.

CIRCLE 277 ON READER SERVICE CARD

The Project Management System for TRS-80 maintains a record of projects within a project group and provides data on up to 75 expense categories. Information can be retrieved for a specific project or group showing costs to date and comparison to budget. \$116. The Time Accounting System records time expended in hours for a client by job category and hours expended for each employee by client number. \$66. Inventory Control System for the TRS-80 features a master file containing quantity on hand, quantity on order, reserved stock, safety stock level, average cost, standard price, month and year-to-date sales in units and dollars, month and year-to-date cost of sale and average weekly usage. \$89.95. National Software Marketing, Inc., P.O. Box 6195, Hollywood, FL 33021.

CIRCLE 278 ON READER SERVICE CARD



Taranto & Associates announces an Invoicing System for the TRS-80 designed to interface directly with the Osborne & Associates Accounts Receivable system. The system enters sales items, picks up the customer name and address from the A/R System file, computes sales taxes and prints the invoice on one of two pre-printed forms. \$99.95. Taranto & Associates, P.O. Box 6073, 4136 Redwood Hwy., San Rafael, CA 94903. (415) 472-1415.

CIRCLE 279 ON READER SERVICE CARD

P.M. is an equipment management/preventative maintenance software system which provides for automatic equipment maintenance scheduling and printing of matched inspection forms or labels as well as a complete search and return of up to 24 equipment parameters. Versions are available for both the general industrial and hospital environments. \$1,000. Contex Systems, 1340 Galindo St., Concord, CA 94520. (415) 687-4727.

CIRCLE 280 ON READER SERVICE CARD

Micronybble Systems promises that Infobox will turn the TRS-80 into "a personal or business information box" in which the user can store, look up, save, and delete information and read information from cassette or disk. \$19.95. Micronybble Systems, 63 Dana St., Cambridge, MA 02138.

CIRCLE 281 ON READER SERVICE CARD

Mailing List is a general purpose mailing label program for the TRS-80 which enables the user to start and maintain a mailing list or similar data base. The user can allow up to 61 characters for either the name/title/company or remarks/code field to meet his particular needs. \$39.95. Software Industries, 902 Pinecrest, Richardson, TX 75080.

CIRCLE 282 ON READER SERVICE CARD

Creative Discount Software has designed the Project Manager System for the cost-conscious project leader who must prepare job estimates and control operating construction or engineering projects. \$45. Creative Discount Software, 256 S. Robertson, Suite 2156, Beverly Hills, CA 90211. (800) 824-7888; in California, (800) 852-7777; in Alaska and Hawaii, (800) 824-7919.

CIRCLE 283 ON READER SERVICE CARD

Form Letter is a system of programs for generating, maintaining and printing multiple form letters and mailing lists. \$275. Structured Systems Group, Inc., 5204 Claremont Ave., Oakland, CA 94618.

CIRCLE 284 ON READER SERVICE CARD



ADULTS ONLY!

X-CELLENT software for your TRS-80 or other Microsoft computer. Over 20 tantalizing tidbits to turn your computer on! Retail value over \$80. To get yours send only \$3 to:

COMPUTER CONSULTANTS
X-SOFTWARE

312 Hoyt St., Dunkirk, NY 14048

FREE SOFTWARE CATALOG

For a free 20-page catalog of Creative Computing Software for all computers circle 224 on the reader service card.

CHALLENGER SOFTWARE

We offer a wide variety of games that use Challenger graphics to their full extent. All Challenger programs are available on cassette tape only. We also write a limited variety of personalized programs. For a FREE catalog, circle our reader service number.

MOUNTAIN SOFTWARE

25600 Village Cir.
Golden, CO 80401
(303) 526-0692

CIRCLE 173 ON READER SERVICE CARD

The "DATA DUBBER"

DUPLICATES ANY
PROGRAM TAPE

TRS-80

Yes, even those in machine language! Feed your cassette into the "Data Dubber" and get out exact replicas of the TRS-80 CSAVE data pulses. Obtain perfect CLOAD's even from tapes with hum, distortion, or minor dropouts... and without constantly adjusting the volume. Connect a second cassette to the "Data Dubber" and make perfect reproductions, just as if the data had come from the TRS-80.

The "Dubber" works with Level I or II and costs only \$49.95 postage paid. Start your own software business. Pays for itself in time saved and reduced tape cost. Order the "Data Dubber" today! If you are not completely satisfied with its performance simply return it for full refund.

P.O. Box 524-CC

THE PERIPHERAL PEOPLE

PO Box 524, Mercer Island, WA 98040

CIRCLE 185 ON READER SERVICE CARD



DOES YOUR COMPUTER SOMETIMES COUGH, SNEEZE OR HAVE A SEIZURE?

It may be suffering from Translet Glitchitis, a curable digestive disorder. The Blitz Bug can bring fast relief from these symptoms in less than 50 nano seconds. Available without prescription. Use only as directed.

* No Computer Should Be
Without One *

Blitz Bug protects your entire circuit, and plugs into any outlet.

\$19.95, Two for \$35.00

N.J. Residents add 5% sales tax

Add \$1.50 shipping & handling delivery from stock

Omni Communications Co., Inc.
Jackson, New Jersey 08527

CIRCLE 179 ON READER SERVICE CARD

CREATIVE COMPUTING

Some Common BASIC Programs



"...an aid for the beginner who ... wants a shortcut to a working program. It is an excellent tool in the hands of a person who has mastered the BASIC instruction set."

MICROSCOPE
January 1977

"...a welcome addition to the growing body of software aimed at people who know what they want to do with their microcomputer but don't know enough about programming to do it themselves."

Rich Didday
KILOBAUD
August 1977

This book was designed for people who can use a variety of practical BASIC programs. It contains listings and documentation for 76 varied programs. The programs are written in a standard version of BASIC. They can be used on many of the microcomputer systems available today. The documentation is complete so only minimal programming knowledge is required to run the programs on your computer.

The 76 programs cover a wide variety of personal finance, math, statistics and general interest topics. The book gives you program listings with remarks. Examples from the Table of Contents include: Mortgage Amortization Table, Linear Interpolation, Integration, Linear Programming, Multiple Linear Regression and Tax Depreciation Schedule.

**and NOW...
for PET and
TRS-80 users**

GUARANTEE

We warrant
each Cassette
to be free from
defects in material
and manufacture.



If you have a Commodore Pet or a Radio Shack TRS-80 (Level II) you can now purchase these programs on cassette, ready to run on your particular computer. We have modified the programs on cassette so they run optimally on the Pet and TRS-80, conforming to their BASIC syntax and video display. A copy of the book should be used for program descriptions and operating instructions.

Order Form

Book/Cassette	Price	Quantity	Amount
06-3 Some Common BASIC Programs (book)	\$ 9.50/12.50*		
25-X Some Common BASIC Programs Pet Cassette	\$15.00		
32-2 Some Common BASIC Programs TRS-80 Cassette	\$15.00		
* Effective January 1, 1979 this price increases to \$12.50.			
California residents add 6% sales tax.		California resident tax	
S.F. BART residents add 6 1/2% sales tax.		Shipping	
		Total Amount Enclosed	

Shipping: (Shipping for large orders to be arranged)

- ☐ All foreign orders \$4.00 per book for airmail
- ☐ \$0.45 per book 4th class in the U. S. (allow 3-4 weeks)
- ☐ \$0.75 per book UPS in the U. S. (allow 10 days)
- ☐ \$1.50 per book special rush shipment by air in the U. S.

Cassettes:

- ☐ No additional charge in the U.S.
- ☐ \$1.50 each foreign air mail

Name: _____
Address: _____
City: _____
State: _____ Zip: _____
Phone: _____

OSBORNE/McGraw-Hill, Inc.

630 Bancroft Way, Dept. L12
Berkeley, California 94710
(415) 548-2805 • TWX 910-366-7277



CIRCLE 182 ON READER SERVICE CARD



Harold L. Novick

Many people have heard of, and some have even bought, a book entitled "101 Basic Computer Games," edited by David H. Ahl, presently the publisher of Creative Computing magazine. Turning to page 2 of one of the versions, the reader discovers at least three interesting things. First, this version is in the second printing dated April, 1974, the first one being July, 1973. The copyright notice in the book reads: "Copyright 1973, 1974 by: Digital Equipment Corporation, Maynard, Massachusetts 01754." Finally, additional copies of the book can be obtained from Creative Computing.

The contents of the book are listed on pages 4, 5 and 6 and in the preface on page 7 it says, "This is not the first collection of computer games and simulations nor will it by any means be the last." So, this is a book that contains a **collection** of computer programs. The preface also informs its reader that the computer games were collected from many sources including the submission by individuals in response to a solicitation and that many of the games were rewritten or revised by the editor.

The above marshalling of "confessed" facts provides the basis for this month's adventure into the world of copyright law and protection of computer software. In a situation where one person writes the software; another obtains it from the first; a third rewrites it; a fourth edits the collection and compiles it together with others into a book; a fifth publishes and copyrights the book; and a sixth distributes it, who owns what? Translation of this query into common areas of interest for the

computer software community is simple: Who can get paid for what, and who can use the software without paying anyone? Providing answers, however, is harder.

There are some more specific questions that can be more easily answered. Does the person who originally submitted the software have any rights to the program and can they collect royalties for their work even though it was rewritten? Is a book copyright valid when the book is merely a collection of other works? Whose permission of the six entities is needed and from which one of the entities can someone obtain a license so that the programs can be copied onto a floppy diskette and distributed without there being a copyright infringement?

If the foregoing questions outline a scenario that sounds familiar, it just might be because the issues arising from these questions are the same ones involved in the CP/M User Group's (CPMUG) revision and distribution of computer game software that appeared in the book "101 Basic Computer Games." Mr. Ahl was somewhat disturbed (rightly he thinks) over that situation and threatened legal action in an open letter to the CPMUG (appearing in the February, 1979 issue of Creative Computing magazine). David, however, should first have consulted page 115 of the book he thinks he is protecting before firing his guns. Perhaps by using the computer game "Gunner" he could have been more on target. But first some background information.

Surprising as it may seem, if someone assembles a number of articles, each of which is independently copyrightable, that assembly may also be copyrightable under both

the old and the new copyright laws. Such an assembly is legally termed a "compilation" and because the assembly consists of a number of separate and independent works in themselves, the assembly is also legally termed a "collective work." A compilation is defined in the new copyright act, effective January 1, 1978, as a work formed by the collection and assembling of pre-existing materials or of data that are selected, coordinated, or arranged in such a way that the resulting work as a whole constitutes an original work of authorship.

The "author" of a compilation is the editor, collector, or assembler, unless such person did it within the scope of employment for his or her employer. In that case, it is a "work for hire" and the author and copyright owner is the employer.

However (and there is always a catch!), protection for a compilation is conditioned and limited. Firstly, the copyright protection does not extend to any part of the compilation in which any pre-existing material has been used unlawfully. One unlawful use would be the use of a copyrighted work in the compilation without the owner's permission. Secondly, the copyright extends only to the material contributed by the author and does not imply any exclusivity of the pre-existing material. Thirdly, in order to qualify for a copyright in a collective work, the additional matter or the manner of combining the independent works must constitute more than a minimal contribution. This requirement for originality would not exist if the only contribution was the addition of a preface to a pre-existing book, but would exist, in this author's opinion, in the book "101 Basic

Harold L. Novick, Patent Attorney, LARSON, TAYLOR & HINDS, Arlington, Virginia 22202.

Forum, con't...

Computer Games" because that book contains a distinguishable variation.

But maybe the plot thickens because Mr. David Ahl in addition to collecting the computer games, re-wrote, modified or cleaned up about 65% of them. That sounds like the creation of a book containing 65% "derivative works" and 35% untouched works. Derivative works are defined in the new copyright act as being based upon one or more pre-existing works which has or have been recast, transformed, or adapted. The same conditions and limitations discussed above with respect to compilations apply to derivative works. However, by definition, a derivative work has been substantially copied from the prior work and thus constitutes an infringing work if the material taken from the prior work was done without the consent of the copyright owner. A discussion of what is substantial copying is another topic best left for another month. The important point is that it does not matter if the incorporated works forming the collective work are in the public domain, are licensed copyrighted works, or are derivative works.

The collective work is copyrightable and can be infringed irrespective of the source of the incorporated works. Thus, maybe the plot does not thicken.

The interesting aspect of collective works is that according to some court cases decided under the old copyright act, a work in the public domain can be converted into a work enjoying copyright protection simply by incorporating it into a copyrighted collective work. Under the reasoning in these court cases, the person copying the work in the public domain must go to the original source to avoid copyright infringement.

However, no one should get his or her hopes up. These cases have been soundly criticized and have not been followed by some other courts. Some

present commentators on the law believe that the new copyright act has eliminated this possibility and argue that a work in the public domain can be copied by anyone irrespective of where that work is found.

Is this, then, the reason that David Ahl has missed his mark in his barrage at the CPMUG? No. In this author's opinion it is because permission was obtained by the CPMUG from the copyright owner, Digital Equipment Corporation, to use the programs in their book, and as the editor of the book, Mr. David Ahl, has nothing to say about it.

But more on who can rightfully claim an infringement of a collective or derivative work next time. It is time to return to star base, replenish the ship's energy and rebuild the shield power before a Klingon starts returning the fire from his starship. □

How many things served us yesterday for articles of faith which today are fables to us.

Michel de Montaigne
Essays

The comments and opinions of the author are given for educational purposes only and are not meant to be legal advice. Specific legal questions should be referred to your personal attorney.

Apple II*

TRIS Text Processing System consists of 20 Editors and Managers. The editors can create and modify basic and assembly programs. Features include string search/replacement, bulking, block line moves, simple macros, and search windows. The symbolic two pass assembler can assemble 10 disk files and create listings and APPLE binary files. It uses 8 character symbols, 50 pseudo mnemonics, and has 8 added pseudo opcodes. Operands may contain numeric parameters, symbols, and arithmetic expressions.

THE HOME FINANCE PROGRAM provides the capability to manage a full year of family financial data. The program can store over 2000 records per disk including income, and cash expenditures. Twelve budget groups are available to analyze long-term spending patterns. Features include easy-to-use data entry, comprehensive data retrieval, extensive editing capabilities, month-to-date and year-to-date budget/expenditure summaries, ability to flag tax deductions, and checkbook reconciliation. Additional features include disk backup to protect against loss of data and selective listings via a screen print mode.

These programs are supplied on disk with a comprehensive user manual.

See your local dealer or contact:

 P.O. Box 1112
Cupertino, CA 95016
Phone (408) 253-8086

Dealer inquiries invited

* Apple II is
a TM of Apple
Computer
Inc.

CIRCLE 207 ON READER SERVICE CARD

NOVEMBER 1979

CHESS * BACKGAMMON * MORE!

TRS-80

NEW MACHINE LANGUAGE GAMES!

Z-CHESS for 16K Level II

Play the classic game of CHESS using the TRS-80 graphics. Seven levels of difficulty (up to six levels of "look ahead") provide a challenging game for all. Alpha-Beta pruning and move sorting are employed to keep response times to a minimum. SETUP mode allows the board to be arranged as desired. Plays all moves including CASTLING and EN PASSANT captures. Numbered squares simplify move input. Possibly the fastest good strategy chess game available! \$17.95

BACK-48 for 16K Level II

A superior opponent which makes extensive use of the TRS-80 graphics to display a regulation style BACKGAMMON board of unrivaled quality and clarity-including the dice! BACK-48 DOUBLES if it stands a good chance of winning-which it usually does! Every feature of a regulation BACKGAMMON match is included-even keeps score! \$14.95

DR. CHIPS for 16K Level II

A fascinating program based on the famous "DOCTOR" and "ELIZA" programs. Simply "TALK" (or "TYPE") to your computer-DR. CHIPS will analyze your sentences and "TALK" back to you-immediately! Although DR. CHIPS' responses should not be taken seriously, he is the ultimate computer introduction for the family and friends-and a super "conversationalist" at parties! \$14.95

Immediate shipment by first class mail - Texas res. add 5%
Order by mail or phone (VISA, MasterCard accepted) from:

The Software Association

P.O. Box 58365
Houston, Texas 77058
Phone: (713) 482-0883

CIRCLE 206 ON READER SERVICE CARD

Questions & Answers

Phil Tubb



Many home computerists have found that a printer is quite useful for a variety of computer applications. But with so many computers and printers on the market, there is often a question of how to connect a printer to your computer. Glen Jenkins of Fort Devens, Massachusetts and Bill Perry of Whitinsville, Massachusetts sent in questions regarding the connection of printers to a TRS-80 system.

To understand how printers are connected, it is first useful to know what a printer does. Nearly all printers are designed to print characters using ASCII data. ASCII has 63 printing characters plus "space" if you stick to the so-called "upper case" set; and 31 more printing characters if you use the full set. It also has some special codes, the most popular of which are "return," "linefeed," and "bell." Some often used codes are "back space," "horizontal tab," "vertical tab," and "form feed." Usually the computer can send characters faster than the printer can print them. It is therefore necessary to have some system for slowing the computer down to the printer's speed. This is complicated by the fact that printers often take different amounts of time for different functions. For example, "return" usually causes a moving print head to return to the far left, and this often takes much longer than printing a single character does.

The easiest way to slow the computer down to a speed acceptable for the printer is to have it send the ASCII codes at a set speed. For example, Teletype Model 33's (a very popular teletypewriter) accept ten character codes per second. The 33 can print any character, ring the bell, or line-

feed in a tenth of a second, so this rate works quite well. However, it generally takes a 33 about twice that long to return the print head. So, if you have the computer send a "return" followed by an A, the A would be smeared across the middle of the paper as the print head returns. To solve this, people often program their computers to send a "rubout" code following a return. The rubout has no particular function on a 33, and it takes up another tenth of a second. (Smarter programmers send a rubout only when the return isn't followed by a linefeed, since returns are nearly always followed by linefeeds, and the 33 can do a linefeed while it is returning.) Aside from the fact that rubouts are sometimes useful for resynchronizing the serial interfaces used by the 33, the rubout serves to fill time and such characters are often called "fill characters."

Problems with this scheme began to appear when more complicated features were added. For example, "form feed" codes are used to advance the paper to the top of the next page. Since the computer routines which run the printer are seldom written to keep track of the current position on the page, or to know the length of the page currently being used, there is difficulty in knowing how many fill characters to use. Only a few are needed if the distance the paper has to be moved is small, and several are needed if it is large. Usually people just program the computer to send enough fill characters to make it work with the maximum possible distance. This always works, but is slower than need be.

One solution to this problem is to

keep the fixed transmission rate, but use a large "buffer." A good example is the popular Decwriter. This terminal can print characters at a rate of 60 per second. Linefeed and return take somewhat longer. However, the Decwriter accepts characters at a rate of 30 per second. When it is doing a return, it saves up the characters it can't print right now in the buffer. When it finishes returning, it begins printing these characters. Since it prints twice as fast as new codes come in, it catches up pretty quickly.

Both these solutions are less than desirable since they keep you waiting around while the printer is going slower than it could if it weren't for the fixed transmission rate. Obviously, variable transmission rates are the best solution. To do this, a "busy flag" is usually added. When the computer sends a character to the printer, the printer sets a signal saying that it is "busy." As soon as it is done with that character, it puts the signal back to the normal "ready" state. When the computer sees the printer is no longer busy, it sends another character. Thus, the printer can be run constantly at its highest speed, regardless of how long each function takes to complete. Often a single character buffer is added so that the moment the printer becomes "ready" a new character is sent from the buffer and the computer has lots of time to get the next character into the buffer while the printer is busy with the last one.

Usually printers which use busy flags are connected in "parallel." This means that there is one wire between the printer and the computer for each signal. Usually there are 7 or 8 wires which carry the ASCII data, a busy

Q & A, con't...

signal to the computer, and a strobe signal to the printer that tells it when another character is ready (there are also some ground wires and sometimes power wires). In contrast, "serial" printers can be connected with a single data wire, plus a ground wire, if a busy flag is not used and if the usual UART-style serializing scheme is used.

Now, onto the actual connecting together of the printer and computer, which is called "interfacing." Obviously, to run the printer at full speed a parallel interface with a busy flag is preferable. On the other hand, if the printer is to be some distance away from the computer, a serial interface is preferable to reduce the cost of the wiring.

First, a look at serial interfaces. We are privileged in this case to be dealing with the only standard for computers which is both moderately well defined and well used (unless you count 115 volt 60 Hertz AC power). This is, of course, the ever-present serial interface with the random letters and digits name; RS-232C. Thanks to well established customs, RS-232C is pretty much the same everywhere. (It is not due to specifications in the standard, which is amazingly deficient in details of any sort.) If you have an RS-232C printer and an RS-232C interface for your computer, you can probably connect them together without any trouble. (Of course you won't necessarily ever be able to write the software the computer will need to operate the printer properly...) About the only consideration has to do with the transmission rate. With a serial interface, each signal (or "bit") is sent one at a time. The data bits are surrounded by some additional control bits. There are two popular formats. One has a start bit, eight data bits, and two stop bits. The other is the same but has only one stop bit. Thus, one uses 11 bits per character and the other uses 10. The 11 bit format is generally sent at a rate of 110 baud ("baud" in this case means "bits per second") which is 10 characters per second. The 10 bit format is generally sent at rates of 300, 600, 1200, 2400, 4800 and 9600 baud for transfer rates of 30, 60, 120, 240, 480 and 960 characters per second. The format and baud rate of the printer and computer must be the same. Some printers have selectable rates and nearly all computer interface cards have selectable rates. At low baud

rates, you usually need only 2 wires, data and ground. These will usually be found within an expensive 25 pin connector which is the de facto standard connector. If the printer is actually a terminal (and thus has a keyboard) you will need a third wire for the data going to the computer. If the interface is going to require more wires, then some of the 22 other RS-232C signals are being used and careful investigation will be required to know whether or not the interface will work.

Now, a look at parallel interfaces. Despite the fact that most people have their printers near their computers and would really rather have a parallel interface, and despite the fact that parallel interfaces are generally cheaper and easier to work, there are, nonetheless, relatively few parallel interfaces in use with personal computers. This is mainly because there is no universally accepted parallel interface. Everybody has their own, and nearly all are different enough to be incompatible. Sounds like cassette tape interfaces, doesn't it? Probably the most popular printer interface is the one used by Centronics. If your printer is available with a Centronics type interface, and so is your computer, you're in luck. Otherwise, order your computer and printer from the same dealer and ask to see it working before you pay (unless you're handy with electronics).

ROMS

J.C. Tobin, of Katytown, Pennsylvania, asks about adding some wiring and a socket to an OSI Challenger in order to make plug-in ROM systems. The object is to come up with ROM cartridges like the Exidy Sorcerer. He asks if the additional wiring would introduce timing, impedance, resistance, or other problems. I think that is unlikely, especially if the wires are kept short (say an inch or two). Any well designed digital system (which may well rule out all personal computers) should have a little leeway in the timing, and this extension should just reduce the leeway a little. He asks if he could obtain compatible EPROM or PROMs and if he could program them or have them programmed. PROMs can certainly be obtained if the original system used PROMs, and if it uses ROMs then the chances are still pretty good. Many suppliers of PROMs can program them for you, often at "no extra charge," but if the supplier is a large one aimed mostly at OEM's (Original Equipment Manufacturers)

they will probably not be thrilled at the prospect of programming a single PROM. Overall, I think plug-in PROMs could be added, although only someone skilled in electronics would want to risk modifying his precious computer.

On the topic of ROM software, I would like to add some comments. ROM software is definitely a step in the wrong direction for personal computers. It's great for washing machines and computer-controlled toasters. Personal computers must have a disk or some similar semi-fast mass-storage device to be useful. Therefore, the only ROM should be a program to start up from the disk. Putting entire languages or operating systems in ROM is, in my opinion, incredibly foolish. (Apple started out this way, and I have always found their ROMs to be the Apple's single largest problem. Of course, their new Pascal system's Language Card—probably the forthcoming second largest problem—is a welcome step away from languages in ROM.) Most programs as large as languages and operating systems tend to contain at least one significant error, and countless minor difficulties. ROMs are hard to change. Further, a ROM can contain only one set of data. RAM (normal read/write memory) can contain any number of different sets of data (one at a time). Thus, ROM wastes addressing space lavishly. One myth that has encouraged the use of ROM is that it is the only way to have a non-erasable language, that doesn't "crash" or "die" easily. This is nonsense for two main reasons. First, you can easily design write protect circuitry for the RAM (as Apple is doing on the Language Card). With a lot of careful attention, you can even design write protect circuitry that can't be unprotected except by the loader when a new language is to be loaded (which probably no one is smart enough to do for personal computers, although they are common on large systems). Second, if a program "goes wild" and erases memory, it will do you very little good to still have the language present after your current program has been erased.

The major advantage of a ROM language is that it is there instantly when you turn the power on. Floppy disks are fast enough that you shouldn't mind waiting a couple of seconds when you first turn the machine on, especially considering all the money you'll be saving on ROMs. Plus, if the current fad is

Q & A, con't...

Pascal you can have it; and next year change to Einstein (or whatever new Super Language "all" the micros are changing over to) without replacing ROMs, buying a new ROM card, or selling your HyperCom for the HyperCom Super Plus system. Those of you who don't have disks or their equivalents yet may well want a ROM based language, but such systems are becoming rare.

8080's, Z-80's and 8085's

Kenneth Gray of Yuba City, California asks why 8080 software will run on Z-80 machines and if that means the 8080 software does not use the expanded instruction set of the Z-80. The reason is that the Z-80 has all the instructions of the 8080, plus some extras thrown in (or, as they say in the trade, "tacked on"). There are instruction codes which are "undefined" on the 8080. Intel hasn't said what they do, so if you use them you're in for trouble. Thus, most 8080 software doesn't use these codes. On the Z-80, these codes have been defined. They perform the new instructions, some of which are useful (like the relative branches) and some of which look good in the ads (like block I/O transfers at CPU speed, or the negate A instruction). Nearly all 8080 programs which don't depend on timing loops and don't use the undefined instructions will run on a Z-80 if the Z-80 has been set for 8080 interrupt mode. However, just because a program is written "for the Z-80" doesn't automatically mean it won't work on an 8080—it probably will if the new instructions aren't used. On a similar topic, 8080 software will generally run on an 8085 if timing loops aren't critical. 8085 software will generally run on an 8080 if the RIM and SIM instructions aren't used, and if the extra interrupts aren't needed. People who rave about the wonders of the Z-80 might well note that there is, indeed, a 4 MHz version of the 8080; and the 5 MHz 8085 is faster than the 4 MHz S-80, although about the same speed memories can be used for either. It's odd that the 8085 gets so little attention.

Numeric Keypad for the Apple

Kenneth Gray of Yuba City, California says that he is considering the purchase of an Apple II computer, but is concerned about the lack of a numeric keypad. While it is possible to buy some keys and wire them in (since the Apple uses contact-type

switches), if you're like me the result would hardly be attractive. On the other hand, you can buy a complete unit which is ready to attach. Although I haven't seen the unit yet, AB Tech has just announced a keypad for the Apple II which is easily attached (they claim) to the encoder chip on the Apple keyboard. This means you don't have to modify your software, which you would if you connected the keys in through a parallel I/O board. The unit has 13 keys (0 through 9, period, dash and "enter"), and sells for \$99. Their address is: AB Tech; 12333 Sunnyvale - Saratoga Road, Saratoga, CA 95070.

TV Bandwidth

Another question from Kenneth Gray asks about the resolution of televisions (probably for his Apple II). He says he's heard that televisions won't resolve signals above 4.5 MHz, and that for home computers the bandwidth should be 10 to 12 MHz. He asks if modifying the set to accept composite video inputs rather than RF modulated inputs will increase the bandwidth.

It is true that the bandwidth of a television is limited to around 4.5 MHz. This is necessary in order to avoid receiving adjacent stations and the sound signal, and there is little you can do about it. It is not true that

for home computers the bandwidth should be 10 to 12 MHz. "Bandwidth" refers to the maximum speed at which the beam which lights up the phosphor on the screen can be turned on and off, and thus refers to the number of dots which can be displayed across a line. (This is actually a definition of bandwidth as it applies to computers.) 10 MHz means the beam can be turned on and off at a rate of 10 million times per second, more or less. There are 30 full frames per second and 525 lines per frame. Thus, there are 30 times 525 lines per second, or 15,750 lines per second. (Some of this is wasted while moving the beam back to the left for the next line, and back up to the top for the next frame or for the second pass in a frame.) After you divide the 10 million rate by 15,750 you get about 635 dots. After taking out about 20% for the part of each line you don't see, this leaves about 508 dots. If you have 64 characters per line, you could have almost 8 dots per character (across). Therefore, with 64 characters of 8 dots each, a 10 MHz bandwidth would give you good dot resolution. Lower bandwidths would tend to be more smeary. The Apple II only has 40 characters across, so a lower bandwidth is acceptable.

The best thing to do is to try out your computer with the particular television and see if the image quality suits you.

With regard to direct video, this will not necessarily increase the bandwidth. Since the designers of the television know that the stages you would be bypassing will limit the bandwidth to a certain frequency, there's no reason for them to go out of their way to make the rest of the circuitry work at higher bandwidths. So, it might be higher and it might not.

A more exhaustive explanation is given in Don Lancaster's "TV Typewriter Cookbook." You can get this at your local computer store or at Radio Shack.

Questions and Answers

Do you have questions related to microcomputers? Send them to this address:

Questions and Answers
Creative Computing Magazine
P.O. Box 789-M
Morristown, N.J. 07960

Please try to keep questions general, like "what is an RS-232C interface?" rather than "how do I connect a Cray-30 terminal into my Hyperdata 80 CPU?" □



© Creative Computing

FREE SOFTWARE CATALOG

For a free 20-page catalog of Creative Computing Software for all computers circle 224 on the reader service card.

POWER!

PROGRAMMING THE Z80



Now! A step-by-step approach to making your Z80 work for you! This book features I/O and addressing techniques, Z80 instruction set and more! Exercises check your progress at each step.
Rodney Zaks
Ref. C260, 460 pp. \$11.95

Also available in this series:
Programming the 6502 . . . \$11.95
6502 Applications Book. \$12.95
6502 Games Book. . . . \$12.95
ASK FOR COMPLETE CATALOG

TO ORDER:

By Phone: (415) 848-8233, Visa, MC, American Express.

By Mail: Indicate quantity desired. Include payment.

Shipping: Add \$1.50 per book (UPS) or 75¢ (4th class - allow 4 weeks delivery).


Tax: In California, add tax.

SYBEX, INC.
Dept. CC-11
2020 Milvia Street,
Berkeley, California 94704

SYBEX

TRS-80 Strings

Stephen B. Gray

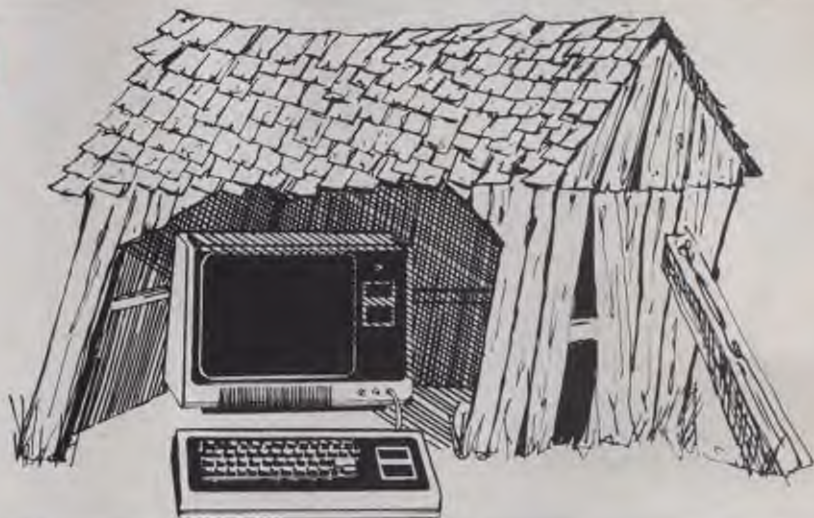

In this twelfth column, we'll have a look at computer graphics that use the 63 Level-II graphics characters, a program that helps children learn their letters and numbers, Radio Shack's software information sheets, a program that tests your RAM memory and a 48-page catalog of TRS-80 software.

Graphics-Character Graphics

No, that's not a misprint. What we're going to discuss is random-number graphics using the 63 graphics characters whose ASCII codes are 129 through 191 (sorry about that, Level-I users), and whose existence is barely hinted at in the Level-II manual.

This short program

```
10 CLS
20 A = RND(1021)
30 B = RND(63) + 128
40 PRINT A, CHR$(B);
50 GOTO 20
```

provides a changing pattern of Level-II graphics characters, all 63 of them. Line 20 provides a random location for the character chosen randomly in line 30.

The pattern can be thinned out a trifle by changing line 30 to add a 64th character:

```
30 B = RND(64) + 127
```

which adds code 128 to the set. This is a space, a blank character. Almost the same effect can be had by instead adding

```
45 PRINT A + 1, CHR$(128);
```

which replaces with a blank the character that's one space after the character put up on the screen by line 40.

If you use line 45 in the program, and if the 1021 in line 20 is changed to 1022, the pattern will move up now and then. If it's changed to 1023, not only will the pattern move up occasionally, but an FC error will occur sooner or later. Any guesses why these things happen?

No, there's nothing artistic about this pattern on the screen; the program is presented just to give some basic ideas of how to use graphics characters in TRS-80 computer art.

For instance, try restricting the pattern to less than the full display area. How would you go about printing the pattern in the upper left quadrant only?

Half the problem is solved by changing line 20 to

```
20 A = RND(511)
```

which displays the pattern only in the upper half of the display area. Notice that even though 511 is the position of the last character in the eighth line, you no longer get an FC error, as you would when using 1023 (the position of the last character in the 16th line). How come? Hint: try 522 in line 20 and see what happens.

As for that top-left quadrant, what we want to do is print random graphics characters in positions 0 through 31, 64 through 95, 128 through 159, etc. (see the Video Display Worksheet on page E/1 of the Level-II manual). What we want to do is to make RND(31) appear at the left half of any of the first eight lines, and this will do it:

```
20 A = RND(31) + (RND(9)-1)*64
```

by allowing the RND(31) pattern to appear on the first line when RND(9)-1 equals 0, on the second line when

RND(9)-1 equals 1 (by adding 64 to each of the character positions generated by the RND(31) function), and so on down the lines.



(As a sidelight, run this program:

```
10 CLS
20 A = RND(1021)
30 B = RND(26) + 64
40 PRINT A, CHR$(B);
50 GOTO 20
```

and consider this question: if this program were allowed to run for a million years, would it eventually put up on the screen, letter-perfect, all the works of Ted Nelson? For your next science-fair entry, add some spaces and some punctuation to the program, and let it run for a few



hundred years as a pilot project. Isn't this much faster—and much more

Strings, con't...

sanitary—than putting ten monkeys at ten typewriters?)

If you'd like to compare graphics-character graphics with graphics-block graphics, try this:

```
10 CLS
20 A = RND(319)
30 B = RND(63) + 128
40 PRINT A, CHR$(B);
50 X = RND(30)
60 Y = RND(15)
70 SET(X + 50, Y + 20)
80 RESET(X + 51, Y + 21)
90 GOTO 20
```


which puts a graphics-character display on the top five lines, and centered below it, a graphics-block display.



For a moving allover pattern of graphics characters, try this:

```
10 CLS
20 FOR A = 0 TO 7
30 FOR X = 129 TO 191
40 PRINT CHR$(X); CHR$(128);
50 NEXT X
60 NEXT A
70 GOTO 20
```

and if you want to make it stop after filling the screen the first time,

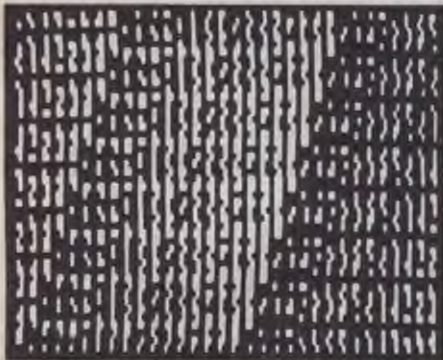

change line 70 to

```
70 GOTO 70
```

If the reasons for lines 20 and 60 being in the program aren't all that obvious, delete them and RUN. But not until you've tried to figure out why they're there.

A tighter pattern can be printed by dropping the CHR\$(128) from the end

of line 40, and changing line 20 to

```
20 FOR A = 0 TO 15
```

but don't forget to first put lines 20 and 60 back in the program. Again, the display can be "frozen" by changing line 70 to a GOTO 70.

The pattern looks a little better with

```
30 FOR X = 191 TO 129 STEP -1
```

Should you want a more regular pattern, change to

```
20 FOR A = 0 TO 29
30 FOR X = 129 TO 191 STEP 2
```

The double-width command works with Level-II graphics characters as well as with letters and numbers. For instance, in the previous program, add this line:

```
15 PRINT CHR$(23)
```

and the display will change to double width, called "32-character mode" in the manual.


If you'd like to do some work with graphics characters, and want to know exactly which one looks like what, run this program:

```
100 CLS
110 A = 129
120 FOR X = A TO A + 9
130 PRINT X;
140 PRINT CHR$(X);
150 NEXT X
160 PRINT
170 PRINT
180 A = A + 10
190 IF A > 190 GOTO 210
200 GOTO 120
210 FOR B = 0 TO 1000
220 NEXT B
230 CLS
240 INPUT "ENTER CHAR. NUMBER"; C
250 FOR D = 0 TO 958
260 PRINT CHR$(C);
270 NEXT D
280 FOR E = 0 TO 1000
290 NEXT E
300 GOTO 110
```

which will print a full set of graphics characters next to their ASCII character codes, give you a moment to



select one by number, ask for that number, and then print an allover pattern using that character, to show

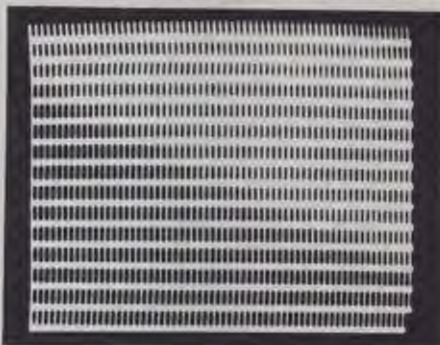

you what it would look like in a continuous pattern.

Actually, any TRS-80 character can be used in this program, so try a letter code such as 87, or the & sign by entering 38 to get an allover pattern of ampersands.

This program displays the allover pattern for a time period depending upon the loop in lines 280-290. If you don't want the program to run over and over, and would rather RUN it each time, delete line 300. This will cause a ready to come up on the screen, and move the pattern up. It will also move up if you change the 958 in line 250 to 959, whether line 300 is there or not.

The loop in lines 210-220 determines how long the character set is displayed. Note that when you enter the code for any of the 63 graphics characters, these characters touch the characters in adjacent rows (well, 36 out of the 63 do, as the character-set display readily shows), as when you enter 191 or 153. But the printing characters can't be made to touch each other at top and bottom for a full allover pattern, as when you enter 38 for a field of ampersands.

To take a longer look at the chart of graphics characters, or at the overall pattern, press while holding down the shift key. When you're through looking, hit any key to "un-freeze" the display.

The graphics in the previous program can be speeded up by changing two lines:

```
250 FOR D = 15360 TO 16383
260 POKE D, C
```

Well, nothing much in the way of computer art has been developed here. The point of presenting it was to show some of the basics of what can be done with graphics characters, and to possibly get you interested in working up a short computer graphics program or two using them, and maybe then sending the programs to

Strings, con't...

me, to run in this column. The shorter the better, by the way.

Incidentally, all of these graphics programs, as well as those in previous TRS-80 columns are taken from the notebook of short programs I developed during the last year out of curiosity to see what can be done with a TRS-80.

When you write a program of any more than trivial interest, write or type it into a notebook or ring binder, with notes (or REM lines) on what it does and how. If you're at all curious about what a TRS-80 can do, you'll be quite surprised how many programs you'll generate in six months.

Happy Face

The Sel-Tronics automatic dual-cassette interface described in this column in June 1979 (p 124) was designed by Les Logan, who also wrote the bank-statement verification program that demonstrates the use of the interface.

Les has written another program, a very different one, called Happy Face. Les wrote it two years ago for the Level-I TRS-80, to teach his two-year-old son Casey, who learned his letters and numbers from it (along with a little help from TV's *Sesame Street*).

When you run Happy Face, you're first asked if you want the alpha-numeric to be made with dots, or as small or large solid characters. Next you're shown a letter or number on the screen, and when you press the corresponding key on the keyboard, a happy face is displayed, and it winks its left eye. After a moment or two, the face disappears, another alpha-numeric appears, and you have to find the right key to make the happy face appear again.

Simple, perhaps, but not if you're only two years old. As first written for Level-I, the program required Casey to first find the right key, and then press ENTER. As rewritten by Casey's father for Level-II, only the matching key needs to be pressed; INKEY\$ takes care of the rest.

Happy Face, for Level-II 16K TRS-80, is \$5 from Les Logan, 436 Warner Circle, Norfolk, VA 23509. On the cassette, Happy Face is described as "for kids 2 years old and up."

Les also wrote the Level-I Computer Doodler program (May 1979, p 130), which is now available for Level-II machines, at the same \$5. The program simplifies the drawing of complex patterns.

Software Info Sheets

Because the TRS-80 catalog gives no information about software other than name and price, Radio Shack has started publishing fact sheets about these programs. They are free, and can be picked up at most Radio Shack stores, in a good-looking folder titled "Radio Shack TRS-80 Software Library."

The first sheets of software data are on games and novelty programs (Blackjack / Backgammon, Quick Watson!, Games Pack I, Microchess, Micro Music, Micro Movie, Micro Marquee), advanced programming aids (TBUG, Level-II Line Renumber, Editor/Assembler), Mailing List System and General Ledger I.

These sheets describe the programs in enough elementary detail to help you decide if you'd like to buy them, and are intended as sales aids. The more expensive the software package, the more detail is given: the \$99.95 General Ledger I fact sheet is four pages long, and includes sample printouts of six different reports.

The General Ledger I and Mailing List System sheets tell just what hardware is required for these programs. General Ledger I, for instance, requires Radio Shack's "32K Business System," including a Level-II 16K TRS-80, expansion interface with 16K RAM, TRS-80 line printer and cable and two mini-disk drives.

By the time you read this, there may be many more info sheets.

RAM-Test Program

A RAM-test program that tests any 16K segment of RAM independently, or all in sequence, is available from Dick Fuller, whose RF-II switchbox was described in this column in March 1979 (p 28).

The cassette loads in a few seconds, and then a menu asks if you want to test each RAM address once, or go through the test over and over "until you decide enough is enough (overnight test)," as the instructions put it.

Three sets of numbers are presented, 00-16K, 16-32K, 32-48K, for you to put YES or NO (or just Y or N) alongside each, depending upon whether you want to test the addresses of the RAMs in the keyboard (00-16K) and/or either of the 16K in the expansion interface.

As soon as you type in the third YES or NO response, the program goes to work. The screen indicates at top left which of the three RAM sets you wish to test, and which one is

being tested at the moment. At top right is the number of loops the program has gone through, if you've chosen the "overnight" test; otherwise it's zero.

Under the heading TSG you see the address being checked out at the moment. The number changes quite rapidly, with about 12 addresses being examined per second. Under BAD AD are listed up to 95 bad addresses; if your RAM has more than 95, only the last 95 will be displayed. Under FAILURES at bottom left is displayed the total number of failures.

The instruction sheet lists eight possible reasons for a FAILURE, including a bad RAM chip, incorrect power-supply voltage, a bad pin on a RAM socket and a bad address or data line. The cause may be entirely temporary. On my Level-II TRS-80 (this program works in Level-II only), the first run of the program indicated RAM failures in positions 30083 to 30106, but not on subsequent runs. The program was developed at Fuller Electronics "to help solve the problem of a flaky computer; we got many failures in the beginning; none of them were traced to a bad RAM chip!"

The program is very short, only 29 lines with a total of 53 BASIC statements, and works by first POKEing a decimal 170 (binary 10101010) into the address being tested, then PEEKing to see if that's really what is there. If it isn't, the address is printed on the screen, and what is really stored at that address is printed on the screen at lower right. The process is then repeated, by POKEing a decimal 85, which is binary 01010101, and PEEKing again.

The RAM-test tape is \$14.95, from Fuller Electronics, 7465 Hollister, Suite 232, Goleta, CA 93017. Add tax in California.

Why \$14.95 for such a short and simple tape? Fuller says there's overhead to be considered, that people will pay \$14.95 as easily as \$9.95, and besides, he adds, this is the only RAM-test tape on the market. The instruction sheet is printed too lightly to be easily read, and the spelling is atrocious (retrivel, wheather, repeted). But the test works well and fast, and is the only one in town. Until somebody starts selling a pirated version for \$4.95, that is.

TRS-80 Software Exchange

What may be the biggest catalog of TRS-80 programs around is the 48-page publication of the TRS-80 Soft-

Strings, con't...

ware Exchange (17 Briar Cliff Drive, Milford, NH 03055).

The catalog is issued by the publishers of Softside and PROG/80 magazines, and includes three dozen games, such as Android Nim, Cribbage, Microchess 1.5, Mastermind II, Tycoon, Star Trek III.3, Kamikaze and Air Raid.

The ten business programs include a mailing list, general ledger, payroll, inventory and an appointment log.

Seventeen special-purpose programs are listed, including Moving Signboard, Renumber, Machine-Language Monitor, Three Monitors For Disk, Ham Radio ST80 Smart Terminal and the TEXT-80 word-processing program.

The catalog ends with half a dozen "personal" programs such as Tarot, Biorhythms, and Home Financial Management, three books and hardware accessories including cassettes, diskettes and storage boxes.

The programs are from a variety of sources, including Small System Software, Lance Miklus, BUS-80, Leo Christopherson and Computer Graphics. Most are for the 16K Level-II TRS-80, some are for the 4K Level-II or Level-I, and a few are for disk systems.

© Creative Computing



"We've just run your date's past performance record through our computers, Miss Swenson, and we feel it is our duty to warn you ...oh... never mind."

NEW FOR TRS-80

ALL TEAK ROLL - TOP DESK

MUST SEE IT TO BELIEVE IT!

DESIGNED SPECIFICALLY FOR TRS-80 BUT
DON'T COUNT IT OUT FOR OTHER MICROS.

SEND FOR

FREE
COLOR PHOTOS
AND BROCHURE

★★★★★★★★★★★★★★★★

MPI ★ SHUGART FOR \$364 ?

YES! \$15 AND \$25

BELOW

COMPETITION

ZERO AND NON-ZERO DRIVES
WITH POWER SUPPLIES

MPI DUAL HEADED \$464

CABLE FOR UP TO TWO DRIVES \$25
FOUR DRIVES \$35

RAM KITS - KEYBOARD/INTERFACE \$80

INSTRUCTIONS MAKE INSTALLATION EASY.
NEC 200 NANOSECOND CHIPS.

TI-810-150 CHARACTERS/SECOND \$1595
BIDIRECTIONAL • TRACTORS • ADJUSTABLE
OUT TO 132 COLUMNS. CABLE \$30

PERSONAL PROGRAMMING SERVICE

14600 GOLDENWEST #116 (714) 894-3736
WESTMINSTER, CA 92683 (714) 898-2539

VISA/MASTERCHARGE ACCEPTED. ORDERS
SHIPPED 2-5 DAYS AFTER RECEIPT. WILL NOTIFY
IF OVER 5 DAYS. DEALER INQUIRES INVITED.

CIRCLE 188 ON READER SERVICE CARD

RSM-2: AN ADVANCED TAPE MONITOR FOR 16K TRS-80'S - \$26.95
RSM-2D: THREE MONITORS FOR TRS-80 DISK SYSTEMS - 29.95
RSM-2 RELOCATOR: PUT RSM-2/20 ANYWHERE IN MEMORY - 9.95
RSM-RS-232-C: PRINT WITH RS-232-C FROM RSM-2/20 - 9.95

22 commands to control your TRS-80 2-80 processor! Examine ROM's, test RAM, program in machine language, read/write machine language tapes, and much more! SYMBOLIC DUMP will disassemble memory into I-80 mnemonics! HEX and two ASCII memory dumps; EDIT, MOVE, EXCHANGE, VERIFY, FILL, ZERO, TEST, or SEARCH memory, read/write SYSTEM tapes, enter BREAKPOINTS, PRINT with TRS232 or Centronics, and read/write disk sectors directly! Radio Shack uses RSM; see page 4-17 of your disk manual! RSM-2 tape loads at top of 16K LEVEL I or II; RSM-2D disk includes 3 versions for 16K, 32K and 48K.

ADVENTURE! \$14.95 each, 5 for \$39.95, all 5 for \$64.95.

Machine language versions of Adventure, the current rage of the big time-sharing computers! 5 versions, 1-Adventureland, 2-Pirate's Adventure, 3-Mission Impossible, 4-Voodoo Castle, 5-The Count. A challenge that can take weeks to solve! LEVEL-II 16K.

BARRICADE: MACHINE LANGUAGE ACTION GAME FOR TRS-80'S - \$14.95

Break through 5-wall Barricade with high-speed ball and keyboard controlled paddle! Trap the ball among the walls and watch it destroy the 100 blocks! Select 96 different options to challenge experts and beginners. 3 scores with the best of each saved to be challenged by other players. NOBODY can achieve the maximum WEIGHTED SCORE of 33,000! 4K LEVEL-I and II.

AIR RAID: MACHINE LANGUAGE TRS-80 SHOOTING GALLERY! - \$14.95

Shoot down high speed aircraft with a ground based missile launcher! Aircraft explode dramatically when hit, sometimes destroying other nearby planes! Score is tallied for each hit or miss, and the highest score is saved to be challenged by other players. Hours of fun for you, and a super demonstration program for entertaining friends! 4K LEVEL I and II.

BASIC-1P - LEVEL-1 BASIC WITH PRINTING! - \$19.95

Run any LEVEL-1 BASIC tape (12K or less) in 16K LEVEL-II TRS-80 without conversion! Plus LIST and LPRINT for TRS232, RS-232-C or Centronics printers. LPRINT ON and LPRINT OFF prints anything that you see on the screen! All LEVEL-I abbreviations and functions supported.

* CALIFORNIA RESIDENTS ADD 6 PER CENT SALES TAX *

* SMALL SYSTEM SOFTWARE * P.O. BOX 366 * NEWBURY PARK, CALIF. 91320 *

TRS232 PRINTER INTERFACE - \$49.95 (+\$2.00 shipping)

Assembled and tested output port for TRS-80 printing. Use any RS-232 or 20-wire current loop ASCII printer. Expansion interface not required. Use with LEVEL-II BASIC, CP/M, BASIC-1P, ELECTRIC PENCIL, RSM-2/20 or your own programs! Standard cassette software included, or order new "FORMATTER" (below) for enhanced printer control.

TRS232 "FORMATTER" SOFTWARE PACKAGE - \$14.95

Page and line length control, form feed function, printer pause, 9 baud rates, "smart" line termination, indented continuation lines, built-in keyboard debounce, software control of screen printing, etc.

THE ELECTRIC PENCIL FOR TRS-80 DISK SYSTEMS - \$150.00

THE ELECTRIC PENCIL FOR TRS-80 TAPE SYSTEMS - 99.95

PENCIL RS-232-C: ADAPT TAPE PENCIL FOR RS-232-C - 9.95

Write text, delete, insert, or move words, lines or paragraphs. Save text on tape (or disk), then print formatted copy with our TRS232 or Centronics printer (RS-232-C with disk version). Right justification, page titling and numbering, transparent cursor and repeating keyboard. Lowercase entry and display with modification. Tape version runs on Level I or II 16K.

CP/M OPERATING SYSTEM WITH TRS232 SOFTWARE - \$145.00

SMALL SYSTEM SOFTWARE/LIFEBOT ASSOCIATES version of CP/M. Includes TRS232 and RS-232-C software, lower-case support, debounce, DCV-2 and other unique utilities. CP/M Editor creates and modifies all files. Assemble directly from disk, placing HEX and PRINT files back onto disk! Includes DDT (Dynamic Debugging Tool), PIP (Peripheral Interchange Program), and more! CP/M is a trademark of Digital Research, Inc.

DCV-1: CONVERT SYSTEM PROGRAMS TO DISK FILES - \$9.95

Execute Adventure, Barricade, Air Raid, RSL-1, ESP-1, T-BUG, etc., from disk, even if they interfere with TRS80S! After using DCV-1, your program loads from disk into high memory, moves itself to its correct address, then jumps there and executes! New version works with TRS80S 2.2.

OTHER TRS-80 PRODUCTS

ESP-1: \$29.95 Editor, assembler, and monitor using INTEL 8080 mnemonics.
RSL-1: 14.95 Draw patterns, then play Conway's LIFE in machine language.
LST-1: 8.00 A disassembled listing of LEVEL-1 BASIC with some comments.

* SMALL SYSTEM SOFTWARE * P.O. BOX 366 * NEWBURY PARK, CALIF. 91320 *

CIRCLE 202 ON READER SERVICE CARD

Get the power of assembly language along with the structure, ease and elegance of PASCAL!

With this in mind, Structured Analysis Systems developed SP80, an innovative concept providing structured programming capabilities within assembly language.

Designed specifically for the 8080 Z80 systems, SP80 can be used with most macro assemblers: XITAN, Cromemco Z80, Microsoft, or Digital Research.

Statements include:

- Iteration: LOOP-EXITIF, REPEAT-UNTIL, WHILE-ENDWHILE, DO
- Conditional: IF-ELSE-ENDIF
- Case analysis: SELECT-CASE-CASE-CASE-ENDCASE

Specific capabilities:

- Conjunction/Disjunction: AND, OR
- Unsigned relations: EQ, NE, LT, LE, GT, GE
- Signed relations: SLE, SLT, SGE, SGT
- Conditions: CARRY, NZ, PLUS, Etc
- Block nesting up to 6 levels
- ROMable code

SP80's manual includes: functional source listings of up to two macro libraries, macro syntax (with examples), and detailed sample SP80 program.

Send \$95 for CPM diskette and manual, or \$25 for manual alone (add \$5 overseas and \$2 Canadian postage) to: SP80, Box 2245, Reston, Virginia 22091, 703-660-8794.

Please specify only up to two assemblers for which to receive documentation. Also available in Macro-11 for the LSI-11 and PDP-11. Laminated SP80 reference cards available at \$5 each.

The best of PASCAL

CIRCLE 212 ON READER SERVICE CARD

T
O
R
A
S
Y
S
T
E
M
S
I
N
C.

Call about our fantastic price on 4-drive complete system.

Level II 4K	\$557.10
Level II 16K	\$750.00
(w/o num. keypad)	
Expansion Interface	\$269.00
Expansion Interface 16K	\$423.00
Expansion Interface 32K	\$524.00
16K Memory Kit for TRS-80 or Apple	\$89.95

TRS-80 & NORTH STAR ADD-ON DRIVES

CUSTOM
ENCLOSURE

CABLE
INCLUDED

Shugart SA 400 or BASF 6106 single drive system in custom enclosure \$415.00
Double drive system in custom enclosure.....\$825.00

BASF 6106 40 track, drive only.....	\$299.00
Shugart SA 400.....	\$315.00
Seamon 6" drive.....	\$399.00
HAZELTINE 1400 (18 MONTH WARRANTY).....	CALL FOR PRICE
Centronics P1 printer (TRS-80 add-on).....	\$396.95
Centronics 779-2 tractor (TRS-80 add-on).....	\$1049.95
Ti printer.....	\$1599.00
Horizon 1 Kit.....	\$1339.00
Single tier walnut Formica enclosure for SA 400 or BASF drive.....	\$27.00
Two tier walnut enclosure for SA 400 or BASF drive.....	\$45.50
Verbatim mini disks, 5-1/4", box of 10.....	\$3.20 per disk
Box of 10, 8" disks.....	\$3.95 per disk

★ MAIL ORDER ONLY ★

INTERTUBE TERMINAL
\$784.00

WE ACCEPT BANK AMERICARD, VISA, MASTER CHARGE

29-02 23RD AVENUE ASTORIA, NEW YORK 11105
(212) 728-5252

Personal Electronic Transactions

Gregory Yob

I am happy to hear from you, and encourage your correspondence. I will try to acknowledge all correspondence, and a SASE makes things easier for both of us. Please send your letters to "Personal Electronic Transactions" c/o PQ Box 354, Palo Alto, CA 94301.



On The Subject Of Software in ROM

A few columns ago, I mentioned the Programmer's Toolkit, which is a ROM mounted on a card which attaches to the PET's Memory Expansion Port. Palo Alto IC's (810 Garland Drive, Palo Alto, CA 94301) gave me a prototype to play with and I can firmly say that the Programmer's Toolkit is a "Good Thing."

While I was enjoying the pleasures of my new toy, it dawned on me that plug-in software for the PET in the form of ROM can be an immensely powerful extension to one's PET. For the effort of a SYS, my PET is immediately enhanced with the Toolkit. A few notions appeared for future PET ROM's - for example, an assembler/debugger package, a set of graphics routines for fast screen dazzles, CAI drill and practice programs, languages like PILOT or the FORTH core interpreter and more.

I am curious as to what you think are useful extensions to your PET. Drop me a note and we'll see that the idea gets to the right people.

Some Graphics Gizmos

After two columns of "heavy going" I thought it would be nice to relax and just fool around for a while - so turn on your PET, and try some of these bits of foolishness.

Enter this program:

```
10 PRINT "clr";
20 FOR J = 1 TO 1000
30 IF J AND 1 THEN PRINT "shift-"; :GOTO 50
40 PRINT "shift-backarrow";
50 NEXT J
60 GOTO 60
```

When this is RUN, we have a good start on a Navajo rug. Now, change the J AND 1 to J AND 2. Those of you who are into optical illusions will like this one. Now try J AND 4, and so on.

About a year ago, Jack Rossum game me this little wonder:

```
10 P=32768
20 PRINT "clr";
30 FOR J=0 TO 24: FOR K=0 TO 39
40 L=(J AND K)AND(J^K)AND NOT (J+K)
50 IF L THEN POKE P+40*J,K,160
60 NEXT K
70 NEXT J
80 GOTO 80
```

A little fiddling will make this thing work faster, and removes the screen "snow" that comes from POKEing:

```
10 P=32768
20 PRINT "clr";
30 FOR J=0 TO 24: FOR K=0 TO 32
40 L=(J AND K)AND(J^K)AND NOT (J+K)
50 IF L THEN PRINT "rvs sp";:GOTO 60
55 PRINT "off sp";
60 NEXT K,J
80 GOTO 80
```

This doesn't snow, but the screen scrolls at the finish - so let's go back to the snow with these changes:

```
10 P=32768,Q=40;R=160
50 IF L THEN POKE P+Q*J+K,R
55 ---- delete this line ----
```

If the graphics characters are changed, this basic pattern can be reused in several guises. Try these changes:

```
10 P=32768;Q=40
15 C(0)=77 :C(1)=78
45 N=L>8AND 1
50 POKE P+K+Q*J,C(N)
```

I wouldn't like to be a rat lost in this maze! Here are some other nice values for C(0) and C(1):

```
95 and 105
73 and 74
86 and 78
```

If you need to know the POKE code for a given graphics character, home the cursor, enter the character and then on the next line enter:

PRINT PEEK(32768)

One more variation:

```
15 C(0)=73:C(1)=74:C(2)=75:C(3)=85
40 L=(J AND K)OR (J^K) AND NOT (J+K)
45 N=L AND 3
```

If you wish, try other changes to the ANDs and NOTs in Line 40. Another set for C is the group 109, 110, 120 and 125.

Alex Breed provided me with a wallpaper maker. It goes like this:

```
10 A$=CHR$(62*AND(1)+160)
20 B$=CHR$(62*AND(1)+160)
30 FOR K= 1 TO 9
40 IF AND(1)>.5 THEN C$=C$+A$:GOTO 60
50 C$=C$+B$
60 NEXT
70 FOR K=1 TO 120: PRINT C$;: NEXT
80 FOR K=1 TO 2000: NEXT
90 CLR: GOTO 10
```

If you want more regular wallpaper, try changing line 30:

```
30 FOR K= 1 TO 10
```

Or, for variety's sake,

```
30 FOR K=1 TO 5 + 10*AND(1)
```

Sometimes the screen won't quite fill up with wallpaper each time.

Sometimes it is fun to try one's own hand at patterns. Change the wallpaper maker as follows:

```
NEW (it's simpler to start over!)
10 INPUT "clr PATTERN:";C$
20 FOR K=1 TO 1000/LEN(C$)+1:PRINT C$;: NEXT
30 FOR K=1 TO 2000: NEXT
40 GET A$:IF A$=" " THEN 40
50 GOTO 10
```

Line 20 checks the length of C\$ to make about one screen of wallpaper.

I will leave it up to you to try various patterns. You will discover that strings of 2, 4, 5, 8, 10 and 20 characters will make vertical patterns. The others will slide across the screen as the pattern is printed.

PET, con't...

When I was working at Commodore, a visitor from Sweden gave me the first variation of this simple animation:

```
10 REM WORM BY K. PALMISTROL, SWEDEN
20 REM TWIDDED BY G. YOB
30 PRINT "c1r";
40 A=32767+500
50 IF RND(1) > .2 THEN 70
60 Q=RND(1)+1
70 ON Q GOTO 80,90,100,110,120,130,140,150
80 A=A-40:GOTO160
90 A=A+41:GOTO160
100 A=A+40:GOTO160
110 A=A+39:GOTO160
120 A=A-1:GOTO160
130 A=A-41:GOTO160
140 A=A+1:GOTO160
150 A=A-39:GOTO160
160 POKE A,42
170 P=0:D=N:M=L:K=J:I=H:G=F:
  F=E:D=C:B=A (0 is letter 0)
180 POKE C,32
190 POKE G,34
200 POKE H,81
210 POKE P,32
220 IF A > 32767 THEN 130
230 IF A < 32767 THEN 90
240 GOTO 50
```

RUN this program and see what you get. Line 50 decides if the worm is to change its direction. Lines 70 to 150 select one of the eight possible directions to go. Line 160 pokes the butterfly onto the screen. Line 170 stores the last 15 locations that were chosen by the worm and lines 180 to 210 draw the rest of the "worm" by erasing and adding the needed parts. Lines 220 and 230 take care of the worm exiting the screen via the home position or the lower left corner.

Since part of the fun is figuring these programs out, I won't say too much about most of them. Try them out, make a change or two, try again - and understanding will come! (Figuring them out is almost as much fun as seeing what they do.)

Changing line 210 to:

```
210 POKE P,46
```

will leave "worm tracks." If you wait about 15 minutes, the screen will be filled with the tracks.

If you want to make the program run faster, make all the constants, like 39, 1, 32767, etc., into variables first and change the lines with the constants to use the variable. The PET runs much faster if it doesn't have to convert a number from the digits into the PET's internal method of storing numbers. For example, if you had:

```
5 Q1=39
```

you can change:

```
110 A=A+Q1:GOTO160
150 A=A-Q1:GOTO160
```

Changing the .2 in Line 50 to other values is also interesting to do. As a

last exercise, try removing line 210. See if you can figure out the result before you RUN the program.

Here is a simple "snowstorm":

```
10 PRINT "c1r";
20 AD=32768
30 BD=1000:CD=42
40 POKE AD+BD:RND(1),CD
50 GOTO 40
```

For rain, try CD=44 or CD=39 and the direction of the wind is up to your whimsey.

For some "snowfall", try it this way:

```
10 PRINT "c1r";
20 AD=32768
30 BD=1000:CD=42
35 DL=40:ED=32
40 LC=AD+BD:RND(1)
45 POKE LC-DL-DL,ED:POKE LC-DL,ED:POKE LC,CD
50 GOTO 40
```

And for changing weather, try this one:

```
10 PRINT "c1r";:C=0:AD=32768:BD=1000:DIM M(10)
  :FORJ=0TO7:READ M(J):NEXT J
20 C=INT(11*RND(1))
30 FORJ=1TOBD+BD:RND(1):POKEAD+BD:RND(1),M(C)
  :NEXT:GOTO20
100 DATA 39,46,44,42,33,34,58,81,87,32,32
```

Notice that the three most accessed variables, C, AD and BD, are the first three variables mentioned in the program. This is intended to make the program run as fast as possible. The placement of 8 statements in Line 10 is intended to reduce the time BASIC needs to find Line 20 when the loop is finished. This is not nearly as important in making a rapid program here.

The dedicated hacker should note that making the value 1 a variable, i.e., UN=1, and using RND(UN) will gain more speed.

Here is another "weather" theme.

```
10 GOSUB 100
20 LC=AD+BD:RND(1):IFLC>ED THEN20
30 PL=PEEK(LC-CD):POKELC,PL:GOTO20
100 PRINT "c1r";:AD=32808:BD=1000:CD=40:
  ED=32767
110 FORJ=1 TO 40:PRINT " ";:NEXT J
120 RETURN
```

After enough icicles, make these changes:

```
110 INPUT "ENTER A MESSAGE";A$
120 PRINT "c1r";
130 FOR J=1 TO 5+5*RND(1)
140 FORK=20 TO 150:RND(1):PRINT " sp ";:NEXT K
150 PRINT A$;
160 IF RND(1) > .5 THEN PRINT
  SPC(40-LEN(A$));A$;:GOTO 160
170 NEXT:RETURN
```

Try out a few graphics entries and see what happens.

Yet another "weather" program:

```
10 PRINT "c1r";
20 C$="hm rt rt rt .... rt rt"
  (40 rt's in C$)
30 T$="dn"
40 P$=" "
50 PRINT LEFT$(C$,1+42*RND(1));
60 FOR J=1 TO 24:RND(1):PRINT P$T$;:NEXT J
70 GOTO 50
```

Note that the semicolon between P\$ and T\$ is omitted. If the PET can discern the variable's type in a PRINT statement, you don't need the semicolon.

Try T\$="dn dn", T\$="dn lft", T\$="dn lft lft" for starters. For some shooting stars, try T\$="shift-Q" and P\$="lft", "dn". If you run the "shooting stars" for a few minutes, a flaw will be revealed. See if you can fix it - and learn something about how the PET's display handles "wrap-around." Also take note of the bottom two lines of the display. Can you fix this one - without scrolling the display occasionally?

The Random Walk can be applied in a similar manner as follows:

```
10 PRINT "c1r";
20 DIM M$(7)
30 FOR J=0 TO 7:READ M$(J):NEXT J
40 T$="shift-Q lft"
50 PRINT "hm rt rt rt .... dn dn dn"
  (20 rt's, 12 dn's)
60 FOR J=1 TO 100:RND(1)
70 PRINT M$(8+RND(1))T$;:NEXT J
80 GOTO 50
100 DATA " ", "dn", "lft dn", "lft lft dn", "lft lft",
  "lft lft up", "lft up", "up"
```

Line 50 centers the cursor in the screen, and Line 70 selects one of the eight directions stored in the array M\$. A different pattern appears if you change line 60:

```
60 FOR J=1 TO 20:RND(1)
```

Since M\$ holds the cursor movements in a handy fashion, other programmed cursor movements can be used to make different animations. Change Lines 60 and 70:

```
60 FOR J=1 TO 40:FOR K=0 TO 7
70 PRINT M$(K)T$;:NEXT:PRINT " sp ";:NEXT J
```

© Creative Computing



"I hate to keep bothering you people... but when do we get our turn at the computer?"

PET, con't...

Another variation on this is to make the number keys provide a directional control:

(Make these changes)

```
20 DIM M$(8),D(9)
35 FOR J=1 TO 9:READ D(J):NEXT J
55 PRINT T$;:GET A$;IF A$="" THEN 55
60 GET A$:IF A$="" THEN 75
65 D=ASC(A$)-48:IF D<1 THEN 60
70 IF D>9 THEN 60
75 PRINT M$(D);T$;:GOTO 60
110 DATA 3,2,1,4,6,0,5,6,7
```

The ball will fly around in the direction indicated by the number key that was pressed last (5 is the center). Pressing '5' stops the ball.

This little program is not without its challenges! First, there is the project of making the screen a true "wrap-around" which involves about a dozen more lines of BASIC code. Second, if you press something other than a "0" to "9" key, you will often get a ?BAD SUBSCRIPT ERROR IN 75 and the program will stop. It's difficult to find out why this happens (It took me 5 minutes, and I'm an expert on bugs!). Here's a hint: Suppose D is some illegal value. When the program jumps to line 60, and the GET A\$ returns a null string, the program then goes off to Line 75. But, the bad value of D hasn't been changed!

Simple physical models provide ideas for other graphical forms. For example, imagine a weight attached to a spring. The force on the weight depends on where the weight is and, as time passes, the force changes the velocity of the weight. Here is a little program that explores this idea:

```
10 REM WEIGHT WATCHER PROGRAM
20 M=100:K=1:V=0
30 DEF FNF(X)=-K*(X-20)
40 INPUT "POSITION(1-39):";X
50 PRINT TAB(X);"Shift-Q"
60 V=V+FNF(X)/M
70 X=X+V
80 GOTO 50
```

Line 20 says that the mass of the weight is 100 units, and that the stiffness of the spring is 1 unit. Line 30 says that the force on the weight is the stiffness of the spring multiplied by the distance the weight is from the center of the screen (that's the X-20 part). The minus sign means the force points towards the center of the screen.

The weight will wiggle faster if the mass is less, or the spring is stiffer. Try M=50 and K=2 and see what happens.

Some variations are needed since watching this contraption gets boring. One way is to "bump" the weight now and then. Here is how to "accomplish that":

```
65 IF AND(1)>.95 THEN V=V+1
```

About every 20 times, the velocity is changed by 1. Sometimes this will make the weight swing more and sometimes less. Try a position of 18 for starters. Eventually, the swing will get larger than the PET's screen and everything will smash up.

A real spring has some frictional drag as well and the following change will provide the drag:

```
65 V=.95*V
```

If that is too much, make the value larger, like $V=.98*V$ instead. To include the "bumps" make the change at line 67 instead of 65.

Credit goes to David Kaufman for the original version of this program which he called the "dangling string."

If you want, other "force laws" can be used in line 30. Try these on for size:

```
30 DEF FNF(X)=-K*SGN(X-20)*SQR(ABS(X-20))
Use K=10 here.
```

```
30 DEF FNF(X)=-K*(X-20)*3
Use K=.1 here.
```

```
30 DEF FNF(X)=-K*(X-20)*5
Use K=.005 here.
```

As you increase the exponent (using odd integers only), the ball looks like it is bouncing off a stiffer and stiffer wall.

Another model that I enjoy fooling with is to simulate gravity. For example, take a collection of objects with some positions and velocities, and watch what happens as gravity changes their positions. To make it easy, I started with a "one-dimensional" world, where all the objects have to be in the same line. On the PET it looks like this:

```
10 REM SLOSH BY GREGORY YOB
20 INPUT "NUMBER OF BODIES";N
25 G=10/N
30 DIM P(N),V(N)
40 PRINT "ENTER POSITIONS (1-39)";
50 FOR J=1 TO N
60 INPUT P(J)
70 NEXT J
80 PRINT "Enter V's";
90 REM DISPLAY POSITIONS
100 FOR J=1 TO N
105 IF P(J)<1 OR P(J)>39 THEN 130
110 PRINT TAB(P(J));"Shift-Q"
120 PRINT "up";
130 NEXT J:PRINT
140 REM COMPUTE NEW VELOCITIES &
150 REM POSITIONS
160 FOR K=1 TO N
170 REM FIGURE FORCE
180 F=0:FOR J=1 TO N
190 IF J=K THEN 220
200 D=P(J)-P(K)
205 IF ABS(D)<.97 THEN 220
210 F=F+SGN(D)*G/(D*D)
220 NEXT J
230 REM FIG VELOCITIES
240 V(K)=V(K)+.95*F
250 NEXT K
```

```
260 REM DO POSITIONS
270 FOR J=1 TO N
280 P(J)=P(J)+V(J)
290 NEXT:GOTO 100
```

When this is RUN, the number of bodies and their positions are entered. The PET then computes the gravitational force for each body and the new velocities & positions. Then the positions are plotted and the computation done again. This program isn't especially fast for quite a bit of math has to be done and it gets worse for more bodies.

A few "fudges" are present to make the program behave reasonably - at the expense of being an accurate gravitational model. Line 25 adjusts the gravitational force to match the number of bodies. Without this, the runs with many bodies would move more rapidly and the runs with 2 or 3 bodies would take forever to show any changes.

The display routine uses a trick to simulate a true carriage-return. After each body is plotted, and the cursor moved to the next line, "up" is printed to put the cursor back to where it was originally.

The K loop in line 160 computes the new velocity for each body. This requires the loop in line 180 which examines the gravitational force of all the other bodies each time. Line 190 takes care to omit the body's attraction to itself (which is infinite).

Line 200 finds the distance, and line 205 is a fudge - if two bodies come close to each other, the attraction is quite strong. This results in a large "boost" to the velocity. When the new positions are figured, the bodies will be far apart, but will still keep their "boosted" speeds. This means that "close encounters" tend to add energy to the model and if you remove this line watch how everything tends to fly apart!


Line 210 adds up the forces and line 240 makes the required change to the velocities.

The loop in line 270-290 then computes the new positions. This can't be included in the K loop because the old positions are needed to compute the force first.

Line 240 has another fudge in it - if a body goes off at a high speed, it can "escape" and never be seen again. The .95 introduces some drag to recover escaped bodies. (There is a balance between the energy added with "close encounters" and the energy taken away with drag. The numbers used here were chosen from trial and error.)

The patterns made by SLOSH remind me of rivers and streams... □

Data Acquisition Modules

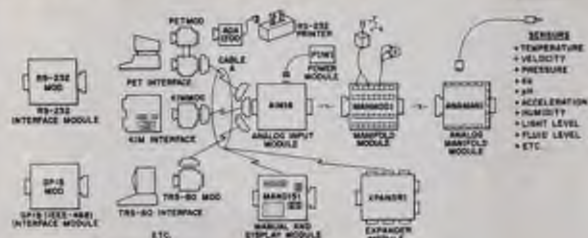

The world we live in is full of variables we want to measure. These include weight, temperature, pressure, humidity, speed and fluid level. These variables are continuous and their values may be represented by a voltage. This voltage is the analog of the physical variable. A device which converts a physical, mechanical or chemical quantity to a voltage is called a sensor.

Computers do not understand voltages: They understand bits. Bits are digital signals. A device which converts voltages to bits is an analog-to-digital converter. Our AIM16 (Analog Input Module) is a 16 input analog-to-digital converter.

The goal of Connecticut microComputer in designing the DAM SYSTEMS is to produce easy to use, low cost data acquisition modules for small computers. As the line grows we will add control modules to the system. These acquisition and control modules will include digital input sensing (e.g. switches), analog input sensing (e.g. temperature, humidity), digital output control (e.g. lamps, motors, alarms), and analog output control (e.g. X-Y plotters, or oscilloscopes).

Analog Input Module



The AIM16 is a 16 channel analog to digital converter designed to work with most microcomputers. The AIM16 is connected to the host computer through the computer's 8 bit input port and 8 bit output port, or through one of the DAM SYSTEMS special interfaces.

The input voltage range is 0 to 5.12 volts. The input voltage is converted to a count between 0 and 255 (00 and FF hex). Resolution is 20 millivolts per count. Accuracy is $0.5\% \pm 1$ bit. Conversion time is less than 100 microseconds per channel. All 16 channels can be scanned in less than 1.5 milliseconds.

Power requirements are 12 volts DC at 60 ma.

The POW1 is the power module for the AIM16. One POW1 supplies enough power for one AIM16, one MANMOD1, sixteen sensors, one XPANDR1 and one computer interface. The POW1 comes in an American version (POW1a) for 110 VAC and in a European version (POW1e) for 230 VAC.

AIM16... \$179.00
POW1a... \$ 14.95
POW1e... \$ 24.95

Connectors



The AIM16 requires connections to its input port (analog inputs) and its output port (computer interface). The ICON (Input CONNector) is a 20 pin, solder eyelet, edge connector for connecting inputs to each of the AIM16's 16 channels. The OCON (Output CONNector) is a 20 pin, solder eyelet edge connector for connecting the computer's input and output ports to the AIM16.

The MANMOD1 (MANifold MODULE) replaces the ICON. It has screw terminals and barrier strips for all 16 inputs for connecting pots, joysticks, voltage sources, etc.

CABLE A24 (24 inch interconnect cable has an interface connector on one end and an OCON equivalent on the other. This cable provides connections between the DAM SYSTEMS computer interfaces and the AIM16 or XPANDR1 and between the XPANDR1 and up to eight AIM16s.

ICON... \$ 9.95
OCON... \$ 9.95
MANMOD1... \$59.95
CABLE A24... \$19.95

XPANDR1



The XPANDR1 allows up to eight AIM16 modules to be connected to a computer at one time. The XPANDR1 is connected to the computer in place of the AIM16. Up to eight AIM16 modules are then connected to each of the eight ports provided using a CABLE A24 for each module. Power for the XPANDR1 is derived from the AIM16 connected to the first port.

XPANDR1... \$59.95

TEMPSENS



This module provides two temperature probes for use by the AIM16. This module should be used with the MANMOD1 for ease of hookup. The MANMOD1 will support up to 16 probes (eight TEMPSENS modules). Resolution for each probe is 1°F .

TEMPSENS2P1 (-10°F to 120°F)... \$49.95

Two electronic devices, likely early calculators or small computers, are shown side-by-side. Each device has a dark rectangular body with a light-colored rectangular display screen on the left side. The screen displays the word "AINIG" in a stylized font. To the right of the screen is a keyboard with multiple rows of small, dark keys. A coiled cable is connected to the top of each device. The background is a plain, light color.

AIM16 Starter Set 1a (110 VAC) ...	\$189.00
AIM16 Starter Set 1e (230 VAC) ...	\$199.00
AIM16 Starter Set 2a (110 VAC) ...	\$259.00
AIM16 Starter Set 2e (230 VAC) ...	\$269.00
PETMOD ...	\$ 49.95
KIMMOD ...	\$ 39.95
PETSET 1a ...	\$295.00
PETSET 1e ...	\$305.00
KIMSET 1a ...	\$285.00
KIMSET 1e ...	\$295.00

Give your potential customers a reason for buying your computers. We offer excellent discounts to legitimate dealers. Contact us for our dealer pack.

This program reads in color graphics from the input and displays this information in bar chart form on the Commodore PET computer.

Category	Value
1	280
2	187
3	152
4	116
5	97
6	74
7	54
8	34
9	24
10	23

Copyright © 1985 by Hayden Books, Inc.

NAME _____
 COMPANY _____
 ADDRESS _____
 CITY _____
 STATE _____ ZIP _____
 VISA ☐ M/C ☐ Expiration date _____
 Card number _____

CIRCLE 135 ON READER SERVICE CARD

CIRCLE 217 ON READER SERVICE CARD

T.H. Lincoln/A.H. McDonough

APL: An Introduction, by Howard A. Peele. Hayden Book Co., Inc., Rochelle Park, NJ. 251 pages, paperback \$8.50. 1978.

The title page says this is a "U-Program Work Text," which is explained in the preface: the book "provides a set of self-teaching materials which provide an informal introduction to APL. They are called 'U-Programs' based on the belief that you will learn APL best if you program it yourself."

Some examples show the computer's results; others have the computer's display omitted and are exercises for the reader to do. Answers are provided in the appendix.

The book is divided into nine U-Programs: Command Execution, Program Definition, Evaluating Expressions, Branching, Applying Functions, Interactive Programs, Arrays, Array Functions and Miscellaneous. These are followed by APL Beggars, which is "a collection of APL expressions which boggle the mind," and a 16-page Summary of APL.

The book "uses a 'heuristic' approach to learning APL. That is, by examining patterns in the examples shown and from results of experiments conducted, the student may make reasonable conjectures about the nature of the APL language." Which means the entire book looks like a printout of expressions and short programs, annotated with hand-printed lecture notes by a bright student. You're shown a few examples, with a few notes, and then an arrow points to blank spaces following further expressions, with "You do these" or "What is A?" or "How many elements in L?" in the vicinity.

The "lecture notes" are short but plentiful and sufficient, and the method is one of the least painful for learning the basics of a complex high-level language. Enough examples are given for the reader to get a good idea of what's going on, and to be able to fill in the blanks, if he's been paying attention.

This is an introduction; it would be interesting to see if this heuristic approach lends itself to an advanced APL text. It should, judging from the author's skill in simplifying the teaching of the elements of APL.

Microcomputers and the 3 R's: A Guide For Teachers, by Christine Doerr. Hayden Book Company, Inc., Rochelle Park, NJ. 188 pages, paperback \$7.95. 1979.

According to the back cover, "...designed for secondary school teachers and administrators, this book presents information about the educational potential of computers. It focuses on the various ways microcomputers can be used to enrich and support the average curriculum."

The first chapter looks briefly at the hardware. Chapter two looks at What The Microcomputer Offers To Education, which turns out to be relevant education, an opportunity for great teaching, increased student motivation, feedback and individualized instruction.

Chapter three tells How To Get Started, with sections on whether to build or buy, where to buy, where to put it, security, free-access computing, student computer clubs, etc.

Then five application areas are examined, with a chapter on each: computer science, problem-solving, simulations, games and computer-assisted instruction. Each includes various examples of relevant programs in BASIC. The computer-science chapter includes a syllabus and teaching notes for a six-week introductory course on computers and BASIC.

The last three chapters are Administrative Computing in Miniature (using a small system in a student information program and in a test-scores program), Where To Go For Help (special-interest groups, publications) and Deciding What To Buy, with comments on a number of current machines. Each chapter ends with a good number of references for further reading.

This compact guide is well worth the price for an introduction to microcomputers that many teachers will surely find useful.

NOVEMBER 1979

TERMINALS

FROM TRANSNET

PURCHASE FULL OWNERSHIP AND LEASE PLANS

DESCRIPTION	PURCHASE PRICE	PER MONTH		
		12 MOS.	24 MOS.	36 MOS.
LA36 DECwriter II	\$1,595	\$ 152	\$ 83	\$ 56
LA34 DECwriter IV	1,295	124	67	45
LA120 DECwriter III, KSR	2,295	219	120	80
LA180 DECprinter I, RO	2,095	200	109	74
VT100 CRT DECscope	1,895	181	99	66
VT132 CRT DECscope	2,295	220	119	80
DT80-1 CRT Terminal	1,795	172	93	63
TI745 Portable Terminal	1,875	179	98	66
TI765 Bubble Memory Term.	2,795	267	145	98
TI810 RO Printer	1,895	181	99	66
TI820 KSR Printer	2,395	229	125	84
ADM3A CRT Terminal	875	84	46	31
QUME Letter Quality KSR	3,195	306	166	112
QUME Letter Quality RO	2,795	268	145	98
HAZELTINE 1410 CRT	895	86	47	32
HAZELTINE 1500 CRT	1,195	115	62	42
HAZELTINE 1552 CRT	1,495	143	78	52
DataProducts 2230	7,900	755	410	277
DATAMATE Mini Floppy	1,750	167	91	61

FULL OWNERSHIP AFTER 12 OR 24 MONTHS
10% PURCHASE OPTION AFTER 36 MONTHS

ACCESSORIES AND PERIPHERAL EQUIPMENT

ACOUSTIC COUPLERS • MODEMS • THERMAL PAPER
RIBBONS • INTERFACE MODULES • FLOPPY DISK UNITS
PROMPT DELIVERY • EFFICIENT SERVICE



TRANSNET CORPORATION

2005 ROUTE 22, UNION, N.J. 07083

201-688-7800

TWX 710-985-5485

CIRCLE 218 ON READER SERVICE CARD

PET Word Processor

**8K
and
16/32K
PET
versions**



This program permits composing and printing letters, flyers, advertisements, manuscripts, etc., using the COMMODORE PET and a printer.

Printing directives include line length, line spacing, left margin, centering and skip. Edit commands allow you to insert lines, delete lines, move lines and paragraphs, change strings, save files onto and load files from cassette (can be modified for disk), move up, move down, print and type.

Added features for the 16/32K version include string search for editing, keyboard entry during printing for letter salutations, justification, multiple printing and more.

A thirty page instruction manual is included. The CmC Word Processor Program for the 8K PET is \$29.50. The 16/32K version is \$39.50.

Order direct or contact your local computer store.

VISA AND M/C ACCEPTED — SEND ACCOUNT NUMBER, EXPIRATION DATE AND SIGN ORDER.
ADD \$1 PER ORDER FOR SHIPPING & HANDLING — FOREIGN ORDERS ADD 10% FOR AIR POSTAGE

CONNECTICUT microCOMPUTER, Inc.

150 POCONO ROAD

BROOKFIELD, CONNECTICUT 06804

TEL: (203) 775-9659 TWX: 710-456-0052

CIRCLE 135 ON READER SERVICE CARD

THE COMPUTING TEACHER

- For Elementary Teachers
- For Secondary Teachers
- For Teachers of Teachers
- Approximately 60 pages per issue
- Published for the past 6 years by a non-profit professional organization.

Send \$8 for 6 issues (one year) or \$16 for 13 issues.
Foreign, add \$2 per year.

The Computing Teacher
c/o Computing Center
Eastern Oregon State College
La Grande, OR 97850

CIRCLE 133 ON READER SERVICE CARD



Set of 8 computer Myths Explained by Monte Wolverton. On heavy stock, large 12x17" size, suitable for framing, dressing up that drab line printer or file cabinet. Only \$3.00 postpaid in USA, \$4.00 foreign. A real megabargain! Send to Creative Computing, P.O. Box 789-M, Morristown, N.J. 07960. Residents of the Garden State add 5% tax. Orders must be prepaid.

Visual Masters For Teaching About Computers, by Donald D. Spencer. Camelot Publishing Co., Box 1357, Ormond Beach, FL 32074. 64 pages, paperback \$8.95. 1978.

Visual Masters For Teaching BASIC Programming, by Donald D. Spencer. Camelot Publishing Co. 64 pages, paperback \$8.95. 1978.

Visual Masters For Teaching FORTRAN Programming, by Donald D. Spencer. Camelot Publishing Co. 64 pages, paperback \$8.95. 1978.

Written by one of the most prolific authors of books on computers, programming and BASIC, these three sets of 60 visual masters are intended to be used to make transparencies for an overhead projector. As one of the three notes, "Most Xerox and bond-paper copying machines can copy the visual masters onto projection film."

The first, for teaching about computers, consists mostly of large drawings with short titles, and covers such areas as computer equipment (typical microcomputer system, typical time-sharing system, card reader, output from computers, etc.), flowcharting, computer applications (computers can draw, computers are used to control airplanes in flight, a self-service banking machine connected to the bank's computer..., etc.), computer history (abacus, Pascal's calculating machine, Mark I (1944), etc.) and several individual masters such as program development cycle, program execution and computer careers.

The drawings are well done, and most of the people shown are drawn in cartoon style to provide an added interest.

Of the three books, this one provides the most leeway for the teacher to present his or her own interpretation of the visual masters, since the titles are as short as possible.

The second, for teaching BASIC programming, is, of course, more restrictive, since it follows the author's idea of the sequence in which concepts and BASIC statements should be presented, and provides concrete examples of programs using each of the statements.

After several visual masters on the basics, such as BASIC language components, characters and symbols, basic operations and expressions, the book presents 20 BASIC statements, from LET to the MAT group, using one to three pages that give the name of the statement, a brief explanation and one or more programs using it.

The programs are all short and simple, with an average of half-a-dozen lines each, a dozen at most. The section on statements is interspersed with programs illustrating the use of several of the statements presented up to that point, such as computing the area of a washer, the number of hours a person has slept in a lifetime, determining the value of the change you have in your pocket or purse, etc.

Ten visual masters at the end of the book present a program each, for printing a table of square and cube roots, simulating the rolling of dice, Fibonacci numbers, prime numbers, coin tossing, etc. These average about 10 lines each.

The visual masters are enlivened by cartoon characters as well as occasional humorous comments in comic-strip balloons.

The third, for teaching FORTRAN programming, is a little more formal than the BASIC book, and more material is presented in a majority of the visual masters.


The book is divided into six sections, with general pages (the computer processing cycle, FORTRAN translation process, FORTRAN coding form, etc.), FORTRAN components (character set, constants, expressions, etc.), FORTRAN statements (assignment, control, DO loop, etc.), program bugs/having trouble (list of common compilation and execution errors), nine FORTRAN programs (interest calculation, permutations, square root, nth Fibonacci number, etc.) and eight FORTRAN cartoons.

While some of the programs are shown as they would be printed out, just as many are presented handwritten on coding forms. Outside of the group of FORTRAN cartoons, there are fewer cartoon characters and humorous comments than in the BASIC book.

The two language books present BASIC and FORTRAN in a sequence that most teachers should have little argument with; those who are unhappy with a visual master or two can, of course, make up their own.

All three books provide a well-thought-out plan for allowing a teacher to spend the maximum amount of class time in meaningful discussion, and a minimum amount of time at the blackboard. These pages do, indeed, as one of the introductions states, "provide classroom teachers with a selection of practical, teachable transparencies that save them considerable time and enhance their presentations."

The masters can, of course, also be used for direct projection. All are printed on 8 1/2-by-11-inch sheets. The language visual masters should be fairly easy to correlate with most textbooks.



Payroll With Cost Accounting, by Lon Poole and Mary Borchers. Osborne & Associates, Box 2036, Berkeley, CA 94702. 371 pages, paperback \$15.00. 1977.

Accounts Payable And Accounts Receivable, by Lon Poole and Mary Borchers. Osborne & Associates. 328 pages, paperback \$15.00. 1978.

The back cover of the payroll book says it "includes program listings with remarks, descriptions, discussion of the principles behind each program, file layouts and a complete user's manual with step-by-step instructions, flowcharts and sample reports and CRT displays."

It is all of this, and more. A great deal of work went into the production of what must be two of the most detailed books on accounting programs ever written.

The books are written in the usual Osborne style that uses lightface type to "expand on information presented in the previous boldface type," so if you're already familiar with accounting, or have read the books once, you could skip through a great deal of material in both.

The payroll book contains listings of 35 programs in the last 131-page chapter. One of the programs is a menu of specific tasks. The other chapters describe data files, provide a management guide and a user's manual, describe the hardware used to develop and test the programs (a Wang 2200B) and the features of the BASIC involved, and tell how to change the programs for custom applications.

About a third of the AP/AR book, 93 pages, consists of source listings. As in the payroll book, remarks are provided for each program in the form of many boxed callouts included in the margins, much easier to read than REMs. The other chapters follow the style of the payroll book, including a description of the Wang 2200B hardware, and a chapter on file and program initialization.

Source listings are provided for 21 programs, one of which is a menu from which the user chooses which of the 20 remaining programs to run: accounts payable check printing with invoice detail, AP invoice aging, automatic postings to general ledger, accounts receivable progress billing, AR partial invoice payments, AR customer statements, AR invoice aging, etc.

The Accounts Payable/Receivable programs were written to share common files with the Payroll programs, as well as with the General Ledger programs described in another \$15 book to be reviewed at a later date. The programs in the first two books are available on floppy disk from computer dealers, and by the time you read this, the general-ledger programs may also be available on disk.

These are handsome books, produced with the usual high quality typical of Osborne & Associates publications. The text is well written in simple style, all the illustrations are very well done, and all computer listings are as legible as possible, which is quite a rarity.

These books, incidentally, are twice the size of most of the Osborne books, and are much easier to read because the type is spread out. No eyestrain here.

ATTENTION APPLE II OWNERS

Southeastern Software

"NEWSLETTER"

For Apple II Owners

NOW IN OUR SECOND YEAR OF PUBLICATION

If you are an experienced programmer and understand all that you read regarding your Apple II then the "NEWSLETTER" is not for you.

BUT — if you find that you are having a problem understanding many of the things written for or about your Apple II then you might spend \$10.00 for a one year, 10 issue subscription and give it a try.

If you would like to receive back issues they are available at \$1.00 each.

One other option is available. Send no money and receive no issues. We hope you will pick one of the former choices.

SOUTHEASTERN SOFTWARE

7270 CULPEPPER DRIVE
NEW ORLEANS, LA. 70126
504/246-8438

CIRCLE 210 ON READER SERVICE CARD

Professionally written software for the

• APPLE • TRS-80™ •

APPLE



ASTROAPPLE — An astrological package that produces natal horoscopes, 30 day forecasts, and compatibility ratings. Includes an 18 page manual.
32K APPLE \$15 CASSETTE \$20 DISKETTE



BENEATH APPLE MANOR — Explore an underground labyrinth, fighting monsters and finding magical treasures. Uses color graphics for floor plans.
16K APPLE \$15 CASSETTE \$20 DISKETTE



BABBLE — Teach your APPLE to create its own stories, poetry, music, and color displays. Includes editor, compiler, interpreter and demo programs.
16K APPLE \$15 CASSETTE \$20 DISKETTE

TRS-80



SUPERMAZE — Generates mazes up to 10,000 cells, only shows you what you would see if you were in the real thing. 100% TRS machine code, FAST!
LEVEL II 16K \$15 CASSETTE



TTT3D — Three dimensional Tic-Tac-Toe, 6 levels of play from very easy to extremely difficult. 100% TRS machine code, very fast.
LEVEL II 16K \$15 CASSETTE

AVAILABLE BY MAIL OR AT YOUR LOCAL COMPUTER STORE
CALIFORNIA RESIDENTS ADD 6% SALES TAX

APPLE II and TRS-80 are registered trademarks of the APPLE Computer Co. and Tandy Corporation.

The

Software Factory

P.O. BOX 904 CHATSWORTH CA 91311

CIRCLE 208 ON READER SERVICE CARD



Puzzle Answers

CREATIVE COMPUTING

creative computing

Subscription Order Form

Please enter my subscription:

- ☐ 3-year (36 issues) \$40 (save \$32 over newsstand price)
- ☐ 2-year (24 issues) \$28 (save \$20 over newsstand price)
- ☐ 1-year (12 issues) \$15 (save \$9 over newsstand price)
- ☐ Canada and Mexico add \$4 per year
- ☐ Foreign surface add \$9 per year
- ☐ Foreign air mail add \$30 per year
- ☐ Payment Enclosed
- ☐ Signature _____
- ☐ Visa
- ☐ No. _____
- ☐ MasterCharge
- ☐ American Express
- ☐ Expiration date _____
- ☐ Please bill me (\$1.00 billing fee will be added; foreign orders must be prepaid)

CREATIVE COMPUTING

P.O. Box 789-M, Morristown, NJ 07960

- ☐ New
- ☐ Renewal
- ☐ Address Change

Name _____
 Address _____
 City _____
 State _____
 Zip _____

For a change of address, please attach old label here. Without it, we cannot assure uninterrupted service.

Allow 8 Weeks for delivery

1179CC



creative computing

Books, Merchandise & Subscriptions

Name _____
 Address _____
 City _____
 State _____
 Zip _____

☐ Payment Enclosed

☐ Signature _____

☐ Visa

☐ No. _____

☐ MasterCharge

☐ American Express

☐ Expiration date _____

☐ Please bill me (\$1.00 billing fee will be added.)

Books & foreign orders must be prepaid.
 Allow 8 weeks for delivery.

Quan.	Cat#	Description	Price

\$1 USA, \$2 Foreign Shipping Charge
 NJ residents add 5% sales tax
 Total _____

FOR FASTER RESPONSE
800-631-8112
 (In NJ, call 201-540-0445)

1179CC

November 1979 • Expires February 10, 1980

creative computing

(Please Print)

Name _____
 Title _____
 Address _____
 City _____
 State _____
 Zip _____

CREATIVE COMPUTING MAGAZINE WOULD LIKE YOUR INPUT ON THEIR OUTPUT.

1. What features of Creative Computing are most enjoyable / useful to you? (Check all that apply)

A. ☐ Articles
 B. ☐ Equipment profiles/reviews
 C. ☐ New Product Information
 D. ☐ Advertisements
 E. ☐ Games and Puzzles
 F. ☐ Input/Output
 G. ☐ Applications/Programs

2. What would you like to see more articles on? (Check all that apply)

A. ☐ Computers in education
 B. ☐ Business Computing
 C. ☐ Technology Tutorials
 D. ☐ Social Implications/Philosophy
 E. ☐ Creative Applications
 F. ☐ News/Gossip

3. Are you a subscriber?
 A. ☐ Yes
 B. ☐ No

101	106	111	116	121	251	256	261	266	271
102	107	112	117	122	252	257	262	267	272
103	108	113	118	123	253	258	263	268	273
104	109	114	119	124	254	259	264	269	274
105	110	115	120	125	255	260	265	270	275
126	131	136	141	146	276	281	286	291	296
127	132	137	142	147	277	282	287	292	297
128	133	138	143	148	278	283	288	293	298
129	134	139	144	149	279	284	289	294	299
130	135	140	145	150	280	285	290	295	300
151	156	161	166	171	301	306	311	316	321
152	157	162	167	172	302	307	312	317	322
153	158	163	168	173	303	308	313	318	323
154	159	164	169	174	304	309	314	319	324
155	160	165	170	175	305	310	315	320	325
176	181	186	191	196	326	331	336	341	346
177	182	187	192	197	327	332	337	342	347
178	183	188	193	198	328	333	338	343	348
179	184	189	194	199	329	334	339	344	349
180	185	190	195	200	330	335	340	345	350
201	206	211	216	221	351	356	361	366	371
202	207	212	217	222	352	357	362	367	372
203	208	213	218	223	353	358	363	368	373
204	209	214	219	224	354	359	364	369	374
205	210	215	220	225	355	360	365	370	375
226	231	236	241	246	376	381	386	391	396
227	232	237	242	247	377	382	387	392	397
228	233	238	243	248	378	383	388	393	398
229	234	239	244	249	379	384	389	394	399
230	235	240	245	250	380	385	390	395	400

November 1979 • Expires February 10, 1980

creative computing

(Please Print)

Name _____
 Title _____
 Address _____
 City _____
 State _____
 Zip _____

CREATIVE COMPUTING MAGAZINE WOULD LIKE YOUR INPUT ON THEIR OUTPUT.

1. What features of Creative Computing are most enjoyable / useful to you? (Check all that apply)

A. ☐ Articles
 B. ☐ Equipment profiles/reviews
 C. ☐ New Product Information
 D. ☐ Advertisements
 E. ☐ Games and Puzzles
 F. ☐ Input/Output
 G. ☐ Applications/Programs

2. What would you like to see more articles on? (Check all that apply)

A. ☐ Computers in education
 B. ☐ Business Computing
 C. ☐ Technology Tutorials
 D. ☐ Social Implications/Philosophy
 E. ☐ Creative Applications
 F. ☐ News/Gossip

3. Are you a subscriber?
 A. ☐ Yes
 B. ☐ No

101	106	111	116	121	251	256	261	266	271
102	107	112	117	122	252	257	262	267	272
103	108	113	118	123	253	258	263	268	273
104	109	114	119	124	254	259	264	269	274
105	110	115	120	125	255	260	265	270	275
126	131	136	141	146	276	281	286	291	296
127	132	137	142	147	277	282	287	292	297
128	133	138	143	148	278	283	288	293	298
129	134	139	144	149	279	284	289	294	299
130	135	140	145	150	280	285	290	295	300
151	156	161	166	171	301	306	311	316	321
152	157	162	167	172	302	307	312	317	322
153	158	163	168	173	303	308	313	318	323
154	159	164	169	174	304	309	314	319	324
155	160	165	170	175	305	310	315	320	325
176	181	186	191	196	326	331	336	341	346
177	182	187	192	197	327	332	337	342	347
178	183	188	193	198	328	333	338	343	348
179	184	189	194	199	329	334	339	344	349
180	185	190	195	200	330	335	340	345	350
201	206	211	216	221	351	356	361	366	371
202	207	212	217	222	352	357	362	367	372
203	208	213	218	223	353	358	363	368	373
204	209	214	219	224	354	359	364	369	374
205	210	215	220	225	355	360	365	370	375
226	231	236	241	246	376	381	386	391	396
227	232	237	242	247	377	382	387	392	397
228	233	238	243	248	378	383	388	393	398
229	234	239	244	249	379	384	389	394	399
230	235	240	245	250	380	385	390	395	400

creative computing

P.O. Box 2976
Clinton, Iowa 52735

Place
Stamp
Here

creative computing

P.O. Box 789-M
Morristown, N.J. 07960

Place
Stamp
Here

creative computing

P.O. Box 2976
Clinton, Iowa 52735

Place
Stamp
Here

creative computing

P.O. Box 789-M
Morristown, N.J. 07960

Place
Stamp
Here



Solve your personal energy crisis. Let VisiCalc™ Power do the work.

With a calculator, pencil and paper you can spend hours planning, projecting, writing, estimating, calculating, revising, erasing and recalculating as you work toward a decision.

Or with VisiCalc and your Apple* II you can explore many more options with a fraction of the time and effort you've spent before.

VisiCalc is a new breed of problem-solving software. Unlike repackaged software that forces you into a computerized straight jacket, VisiCalc adapts itself to any numerical problem you have. You enter numbers, alphabetic titles and formulas on your keyboard. VisiCalc organizes and displays this information on the screen. You don't have to spend your time programming.

Your energy is better spent using the results than getting them.

Say you're a business manager and want to project your annual sales. Using the calculator, pencil and paper method, you'd lay out 12 months across a sheet and fill in lines and columns of figures on products, outlets, salespeople, etc. You'd calculate by hand the subtotals and summary figures. Then you'd start revising, erasing and recalculating. With VisiCalc, you simply fill in the same figures on an electronic sheet of paper* and let the computer do the work.

Once your first projection is complete, you're ready to use VisiCalc's unique, powerful recalculation feature. It lets you ask "What if?," examining new options and planning for contingencies. "What if" sales drop 20 percent in March? Just type in the sales figure. VisiCalc instantly updates all other figures affected by March sales.


Or say you're an engineer working on a design problem and are wondering "What if that oscillation were damped by another 10 percent?" Or you're working on your family's expenses and wonder "What will happen to our entertainment budget if the heating bill goes up 15 percent this winter?" VisiCalc responds instantly to show you all the consequences of any change.

Once you see VisiCalc in action, you'll think of many more uses for its power. Ask your dealer for a demonstration and discover how VisiCalc can help you in your professional work and personal life.

You might find that VisiCalc alone is reason enough to own a personal computer.

VisiCalc is available now for Apple II computers with versions for other personal computers coming soon. The Apple II version costs just \$99.50 and requires a 32k disk system.

For the name and address of your nearest VisiCalc dealer, call (408) 745-7841 or write to Personal Software, Inc., Dept. CP, 592 Weddell Dr., Sunnyvale, CA 94086. If your favorite dealer doesn't already carry Personal Software products, ask him to give us a call.

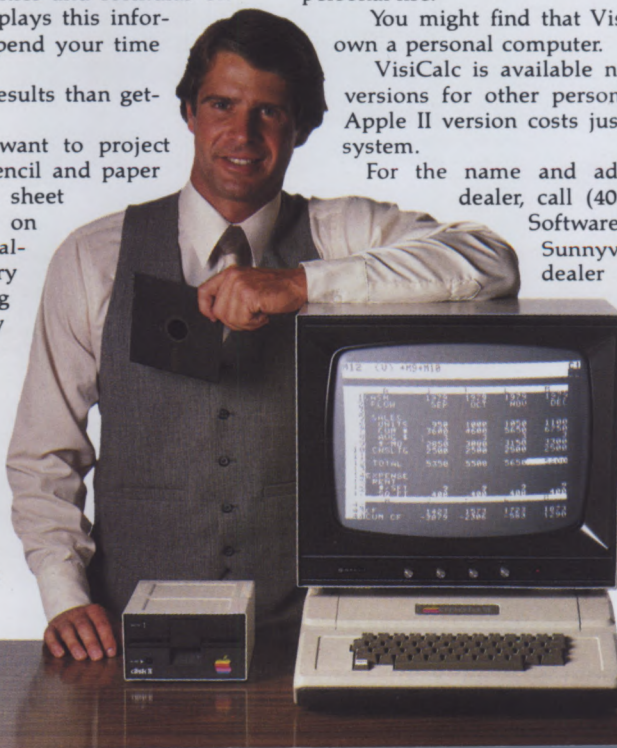

PERSONAL SOFTWARE

VisiCalc was developed exclusively for Personal Software by Software Arts, Inc., Cambridge, Mass.

TM—VisiCalc is a trademark of Personal Software, Inc.

*Apple is a registered trademark of Apple Computer, Inc.

Step up to your next computer.



STEP UP TO A C4P FROM OHIO SCIENTIFIC

You know about computers. In fact, you probably own one now. One that you might be thinking of expanding. We have a better idea. Take a giant step into the personal computing future with an amazing, new C4P from Ohio Scientific.

SPEED SEPARATES THE COMPUTERS FROM THE TOYS

The C4P MF has execution speed that is twice as fast as Apple II or Commodore PET and over THREE times as fast as TRS-80. They are many times faster than the recently introduced flock of video game type computers. And, as if that weren't fast enough, the C4P nearly doubles its speed when equipped with the GT option.

Just look at the back panel of the C4P MF.



All the I/O you'll ever need!

* Apple II, Commodore PET, TRS-80, and Atari 800 are registered trade names of Apple Computer Inc., Commodore Business Machines Ltd., Radio Shack, Atari, respectively.

SOUND

- 1—programmable tone generator 200 — 20KHz
- 1—8 bit companding digital to analog converter for music and voice output.

HUMAN INPUT EXPANSION

- 2—8 axis joystick interfaces
- 2—10 key pad interfaces

HOME INTERFACE

- 1—AC-12 AC remote control interface

DISPLAY

- 32 x 64 with upper and lower case 2048 Characters.
- 256 x 512 effective Graphic Points
- 16 Colors

SOFTWARE

Ohio Scientific offers a comprehensive library of both systems and applications software for the C4P.

The C4P is an outstanding premium computer — years ahead of the market. We know because there's nothing quite like it for the price, anywhere. And probably won't be for a very long time.

C4P \$698

8K BASIC-in-ROM, 8K of static RAM and audio cassette interface. Can be directly expanded to 32K static RAM and two mini-floppy disks.

C4P MF \$1695

All the features of the C4P plus real time clock, home security system interface, modem interface, printer interface, 16 parallel lines and an accessory BUS. The C4P MF starts with 24K RAM and a single mini-floppy and can be directly expanded to 48K and two mini-floppies. Over 45 diskettes now available including games, personal, business, educational and home control applications programs as well as a real time operating system, word processor and a data base management system.

Computers come with keyboards and floppies where specified. Other equipment shown is optional.

OHIO SCIENTIFIC

1333 S. Chillicothe Road
Aurora, Ohio 44202
(216) 562-3101

CIRCLE 176 ON READER SERVICE CARD